

COMPANY UP&DOWN DOWNLIGHT IN-GROUND BRICKLIGHT FLOODLIGHT BOLLARD BULKHEAD GARDEN URBAN CLASSIC URBAN MODERN POST LAMPS REFERENCES

BEPPE 500 HIGH POWER LED

GRAND SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top and wall installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP65.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo e a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito completo di **lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP65.*



P50.000.H1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°C 90% HUMIDITY


VOLTAGE SURGE RESISTANT



DRIVER SILICONE PROTECTION







BEPPE 500 HIGH POWER LED - COMPONENTS

IP65



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalampada E27 e provvisto di lampada a LED ad **ALTA POTENZA**. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

BIPODE in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.

BEPPE 500 HIGH POWER LED

P60.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 7.5 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m² 0,246

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.



100 - 240 V


*ADD. SUFFIX

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

E27	50 W	5300 Lm	4000 K	.H1L
			3000 K	.H1R
E27	60 W	7000 Lm	4000 K	.W1L
			3000 K	.W1R

PHOTOMETRIC DATA SAMPLE - BEPPE 500 HIGH POWER LED

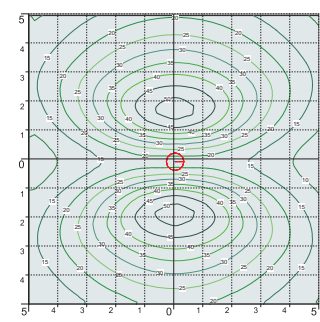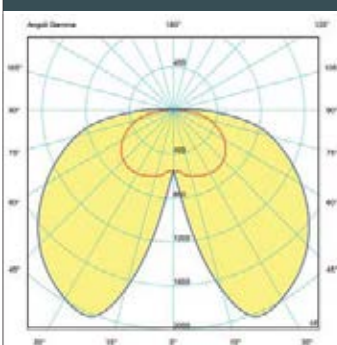




SAVE -40%

HIGH POWER LED 60W
(power consumption)

Area: 10x10mt
Height: 5mt
25 lux

=



HQI 100W
power consumption =84W

LED LAMPS



Technical details on page 552.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

COMPANY
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BOLLARD
BULKHEAD
GARDEN
URBAN CLASSIC
URBAN MODERN
POST
LAMPS
REFERENCES

BEPPE 500

GRAND SIZE




P60.371.W1R



P60.421.D9K

MADE IN ITALY

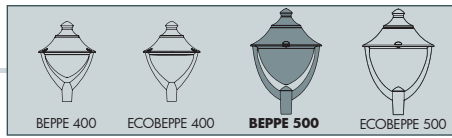

EKTOR 6000/BEPPE500
P60.384.000

600

Pcs 1
Kg 84,1
mc 1,41

6735

400

EKTOR 5000/BEPPE500 P60.377.000	AKILLE 5000/BEPPE500 P60.427.000
Pcs 1 Kg 54,6 mc 0,48	
EKTOR 4500/BEPPE500 P60.374.000	AKILLE 4500/BEPPE500 P60.424.000
Pcs 1 Kg 49,1 mc 0,46	

600

600

5735
5235

EKTOR5000

AKILLE4500

Ø 265

EKTOR 4000/BEPPE500 P60.371.000	AKILLE 4000/BEPPE500 P60.421.000
Pcs 1 Kg 43,6 mc 0,43	
EKTOR 3500/BEPPE500 P60.367.000	AKILLE 3500/BEPPE500 P60.417.000
Pcs 1 Kg 40,2 mc 0,40	
EKTOR 3000/BEPPE500 P60.364.000	AKILLE 3000/BEPPE500 P60.414.000
Pcs 1 Kg 36,8 mc 0,38	

600

600

600

4735
4235
3735

EKTOR4000

AKILLE3500

Ø 265

BEPPE500
P60.000

600

Pcs 1
Kg 9,1
mc 0,20

850

Ø 60

PILAR/BEPPE500
P60.253

920

Pcs 1
Kg 11,1
mc 0,24

1250

NEW LOT/BEPPE500
P60.115

600

Pcs 1
Kg 9,4
mc 0,21

960