

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

GLOBE 500 CLASSIC

GRAND SIZE



Ø 500 mm PMMA globe, complete with classic base made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, hanging and wall installation. Base provided with E27 lampholder and prepared for louvre fixation. Insulation class II, protection rating IP55.

Globo Ø 500 mm in polimetilmetacrilato (PMMA) completo di base classica realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Base fornita con portalampada E27 e predisposta per il fissaggio del frangiluce. Classe di isolamento II, grado di protezione IP55.



G50.B50.E27FC1



GLOBE 500 CLASSIC - COMPONENTS

IP55



500 mm GLOBE made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only. Available in clear, opal or smoked colour.

GLOBO Ø 500 mm Ø 500 mm in polimetilmetacrilato (PMMA), resistente all'ingiallimento ed ai raggi UV, realizzato in un unico pezzo. Disponibile nei colori trasparente, bianco o fumé.

Clear (X)

Opal (Y)

Smoked (Z)



Chrome aluminium **LOUVRE** with a laminar symmetrical optic system to direct the lighting output and to get a lower dazzle (optional).

FRANGILUCE in alluminio cromato con sistema ottico lamellare a ripartizione simmetrica per orientare il fascio di luce e ridurre l'abbagliamento (opzionale).

Luminaries **BASE**, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free, consisting of a support and of a cover provided with E27 - E40 lampholder.

BASE del globo, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Composta da un supporto e da un coperchio in cui si trova l'alloggiamento per il portalampada E27 (incluso).

GLOBE 500 CLASSIC

G50.B50 *



Dimensions and weight

Height: 630 mm
Diameter: 500 mm
Junction to support: diameter 60 mm
Weight: 3,6 Kg
Area exposed to wind pressure: CxS = m² 0,181

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal Smoked

CHROME ALUMINIUM LOUVRE

H.FC1 closed
Upward position



H.FC6 open
Downward position



* ADD THE ABOVE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

E27-E40

*ADD. SUFFIX



Globe complete with classic base and **E27** or **E40** lampholder.

suitable lamps:

CFL-LED

SON-HQI

max 100W



E27
Lampholder only

.E27

E40
Lampholder only

.E40

PHOTOMETRIC DATA SAMPLE



GLOBE 500 E27 - opal
HQI 100W

POST height 4,5mt
10x10mt area: average 9 lux

The photometric data for all the versions are available upon request or on our website.

LAMPS
POST
URBAN MODERN
URBAN REVIVAL
URBAN CLASSIC
SOLAR
BULKHEAD
FLOODLIGHT
BRICKLIGHT
IN-GROUND
DOWNLIGHT
UP&DOWN
BOLLARD
GARDEN CLASSIC
GARDEN REVIVAL

GLOBE 500 CLASSIC

GRAND SIZE



MADE IN ITALY

GIONA 5000/G500
G50.227


Pcs 1
Kg 63,6
mc 1,157

GIONA 4500/G500
G50.224

Pcs 1
Kg 61,6
mc 1,027

GIONA 4000/G500
G50.221

Pcs 1
Kg 58,6
mc 0,907



5500
5000
4500


400

GIONA 5000 ARON/G500 1L
G50.227.N10

Pcs 1
Kg 69,4
mc 1,146

GIONA 4500 ARON/G500 1L
G50.224.N10

Pcs 1
Kg 67,4
mc 1,031

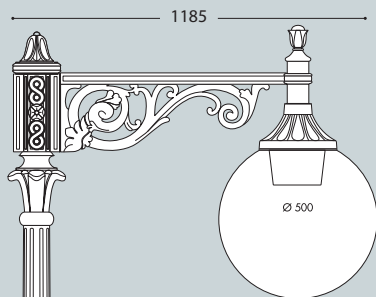


5160
4660

400


ARON/G500
G50.172

Pcs 1
Kg 8,9
mc 0,178

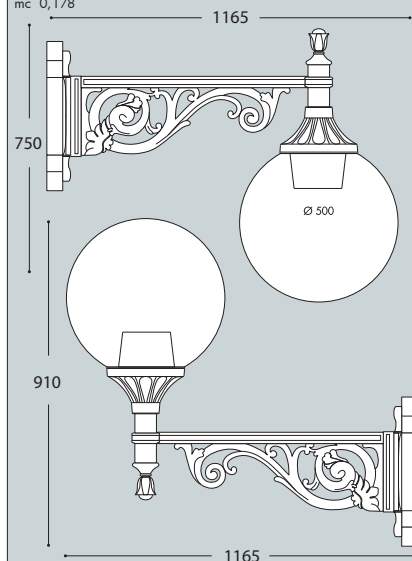

LOT/G500
G50.113

Pcs 2
Kg 9
mc 0,275




800

Ø 190


GLOBE 500 CLASSIC
G50.B50

Pcs 2
Kg 7,2
mc 0,275



SICHEM/G500
G50.121


Pcs 2
Kg 15,2
mc 0,275

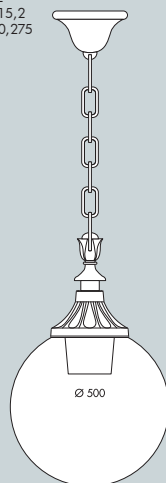


1050

GIONA 4500 ARON/G500 2L
G50.224.N20

Pcs 1
Kg 74
mc 1,115

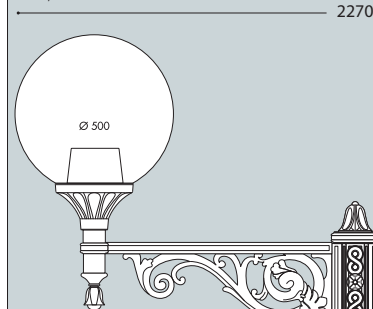


Ø 500



2

GIONA 5000 ARON/G500 2L
G50.227.N20

Pcs 1
Kg 76
mc 1,239



5150