

# SALEM

MEDIUM SIZE



E27 hexagonal lantern in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

*Lanterna esagonale E27 in stile classico, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di lampadine LED adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

|                          |                          |                                    |
|--------------------------|--------------------------|------------------------------------|
| 6,5W<br>800 lm<br>2700 K | 8,5W<br>920 lm<br>2700 K | 11W<br>1200 lm<br>4000 K<br>6500 K |
|--------------------------|--------------------------|------------------------------------|

+80°C  
-30°

90% HUMIDITY

VOLTAGE SURGE  
RESISTANT

**INDOOR & OUTDOOR USE**



K26.111.F1R

|            |                          |                             |                                  |             |                      |
|------------|--------------------------|-----------------------------|----------------------------------|-------------|----------------------|
| CE         | CB<br>IECEE CB<br>SCHEME | UV<br>UV-TREATED            | CLASS II<br>DOUBLE<br>INSULATION | RESIDENTIAL | 360°<br>FILAMENT LED |
| RECYCLABLE | ANTI-SHOCK               | TEMPERATURE<br>+90°<br>-60° |                                  | WALL        | HANGING              |
|            |                          |                             |                                  |             | POST                 |

**SALEM - LANTERN COMPONENTS**

**IP55**



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

***PINNACOLO** decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Tool-free opening for relamping and maintenance.

***TETTO** realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalamпада E27. Rimovibile senza l'ausilio di attrezzi per manutenzione e cambio lampadina.*

**DIFFUSER** made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

***DIFFUSORE** in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).*

**CAGE** made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***GABBIA** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

**SALEM**

K26.000 \*



**Dimensions and weight**

Height: 410 mm  
Width: 260 mm  
Depth: 227 mm  
Weight: 1,3 Kg

**Moulded colours:**

Black White

**Painted colours:**

Antique green Antique bronze

**Diffuser PMMA:**

Clear Opal

**E27 FILAMENT**



- perfect **MATCHING WITH DECORATIVE LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

**E27 CCT SET**



- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

**100 - 240 V**

\*ADD. SUFFIX


| suitable lamps:<br>CFL-LED<br>max 160 mm                                                                   |       | E27<br>lampholder only |                            | .E27 |
|------------------------------------------------------------------------------------------------------------|-------|------------------------|----------------------------|------|
| LAMP                                                                                                       | POWER | LUMINOUS<br>FLUX UP TO | COLOUR<br>TEMP.            |      |
| <br>FILAMENT<br>LED E27 | 6,5W  | 800 lm                 | 2700 K                     | .F1R |
| <br>CCT SET<br>LED E27  | 8,5 W | 920 lm                 | 6500 K<br>4000 K<br>2700 K | .V1K |
| <br>CCT SET<br>LED E27  | 11 W  | 1200 lm                | 6500 K<br>4000 K<br>2700 K | .T1K |
| <br>6,5W<br>filament    |       | =                      | 60W<br>incandescent        |      |
| <br>8,5W<br>CCT         |       | =                      | 75W<br>incandescent        |      |
| <br>11W<br>CCT          |       | =                      | 75W<br>incandescent        |      |
| SAVE up to 89%                                                                                             |       |                        |                            |      |

**LED LAMPS**




Comply with: EU2019/2015  
EU2019/2020  
Technical details on page 668.

**CCT SETTABLE LED LAMP**



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

**PHOTOMETRIC DATA SAMPLE**

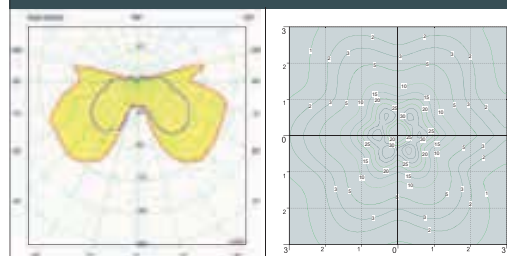

**SALEM lantern clear with Fumagalli Led Lamp CCT set 8,5W.**

**POST** height 2mt  
6x6mt area: average 6 lux

*The photometric data for all the versions are available upon request or on our website.*

\* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

# SALEM

MEDIUM SIZE



MADE IN ITALY

| BISSO/SALEM           |             |
|-----------------------|-------------|
| <b>E27</b> lampholder | K26.131.E27 |
| <b>6,5W</b> filament  | K26.131.F1R |
| <b>8,5W</b> CCT set   | K26.131.V1K |
| <b>11W</b> CCT set    | K26.131.T1K |

Pcs 12  
Kg 19  
mc 0,225

| SICHEM/SALEM          |             |
|-----------------------|-------------|
| <b>E27</b> lampholder | K26.120.E27 |
| <b>6,5W</b> filament  | K26.120.F1R |
| <b>8,5W</b> CCT set   | K26.120.V1K |
| <b>11W</b> CCT set    | K26.120.T1K |

Pcs 12  
Kg 19  
mc 0,225

| SALEM   |  |
|---------|--|
| K26.000 |  |

Pcs 1  
Kg 1,3  
mc 0,018

| MINILOT/SALEM         |             |
|-----------------------|-------------|
| <b>E27</b> lampholder | K26.111.E27 |
| <b>6,5W</b> filament  | K26.111.F1R |
| <b>8,5W</b> CCT set   | K26.111.V1K |
| <b>11W</b> CCT set    | K26.111.T1K |

Pcs 12  
Kg 19  
mc 0,225

| PORPORA/SALEM         |             |
|-----------------------|-------------|
| <b>E27</b> lampholder | K26.141.E27 |
| <b>6,5W</b> filament  | K26.141.F1R |
| <b>8,5W</b> CCT set   | K26.141.V1K |
| <b>11W</b> CCT set    | K26.141.T1K |

Pcs 1  
Kg 4  
mc 0,034

| IAFET/SALEM resin     |             |
|-----------------------|-------------|
| <b>E27</b> lampholder | K26.162.E27 |
| <b>6,5W</b> filament  | K26.162.F1R |
| <b>8,5W</b> CCT set   | K26.162.V1K |
| <b>11W</b> CCT set    | K26.162.T1K |

Pcs 2  
Kg 79  
mc 0,086

| MIZAR/SALEM resin     |             |
|-----------------------|-------------|
| <b>E27</b> lampholder | K26.151.E27 |
| <b>6,5W</b> filament  | K26.151.F1R |
| <b>8,5W</b> CCT set   | K26.151.V1K |
| <b>11W</b> CCT set    | K26.151.T1K |

Pcs 1  
Kg 3  
mc 0,07

| ALOE'R/SALEM resin    |             |
|-----------------------|-------------|
| <b>E27</b> lampholder | K26.163.E27 |
| <b>6,5W</b> filament  | K26.163.F1R |
| <b>8,5W</b> CCT set   | K26.163.V1K |
| <b>11W</b> CCT set    | K26.163.T1K |

Pcs 2  
Kg 8,6  
mc 0,121

| ARTU'/SALEM           |             |
|-----------------------|-------------|
| <b>E27</b> lampholder | K26.158.E27 |
| <b>6,5W</b> filament  | K26.158.F1R |
| <b>8,5W</b> CCT set   | K26.158.V1K |
| <b>11W</b> CCT set    | K26.158.T1K |

Pcs 1  
Kg 9,6  
mc 0,148

SALEM  
MEDIUM SIZE





SABA



SALEM




SILOE

**RICU BISSO/SALEM 2+1**

|                       |                 |
|-----------------------|-----------------|
| <b>E27</b> lampholder | K26.157.S21.E27 |
| <b>6,5W</b> filament  | K26.157.S21.F1R |
| <b>8,5W</b> CCT set   | K26.157.S21.V1K |
| <b>11W</b> CCT set    | K26.157.S21.T1K |


Pcs 1  
Kg 13  
mc 0,214

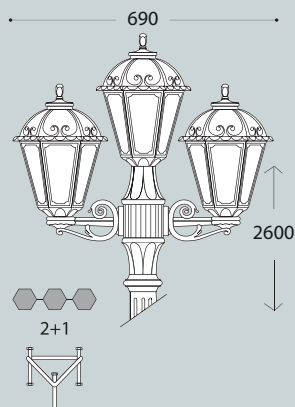

**RICU BISSO/SALEM 3+1**

|                       |                 |
|-----------------------|-----------------|
| <b>E27</b> lampholder | K26.157.S31.E27 |
| <b>6,5W</b> filament  | K26.157.S31.F1R |
| <b>8,5W</b> CCT set   | K26.157.S31.V1K |
| <b>11W</b> CCT set    | K26.157.S31.T1K |


Pcs 1  
Kg 14,3  
mc 0,214

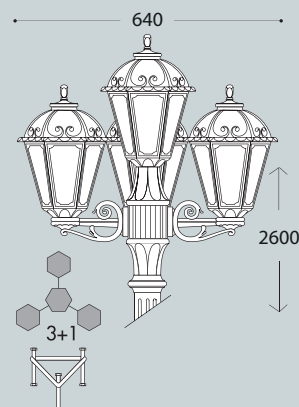

**GIGI/SALEM**

|                       |             |
|-----------------------|-------------|
| <b>E27</b> lampholder | K26.156.E27 |
| <b>6,5W</b> filament  | K26.156.F1R |
| <b>8,5W</b> CCT set   | K26.156.V1K |
| <b>11W</b> CCT set    | K26.156.T1K |


Pcs 1  
Kg 10,9  
mc 0,172

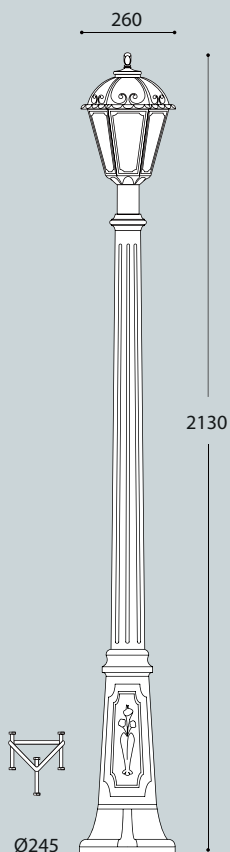

**RICU/SALEM**

|                       |             |
|-----------------------|-------------|
| <b>E27</b> lampholder | K26.157.E27 |
| <b>6,5W</b> filament  | K26.157.F1R |
| <b>8,5W</b> CCT set   | K26.157.V1K |
| <b>11W</b> CCT set    | K26.157.T1K |


Pcs 1  
Kg 11,7  
mc 0,18

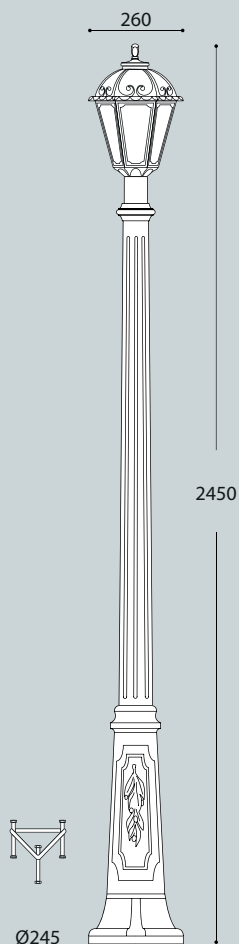

**RICU BISSO/SALEM 2L**

|                       |                 |
|-----------------------|-----------------|
| <b>E27</b> lampholder | K26.157.S20.E27 |
| <b>6,5W</b> filament  | K26.157.S20.F1R |
| <b>8,5W</b> CCT set   | K26.157.S20.V1K |
| <b>11W</b> CCT set    | K26.157.S20.T1K |

Pcs 1  
Kg 14,2  
mc 0,214

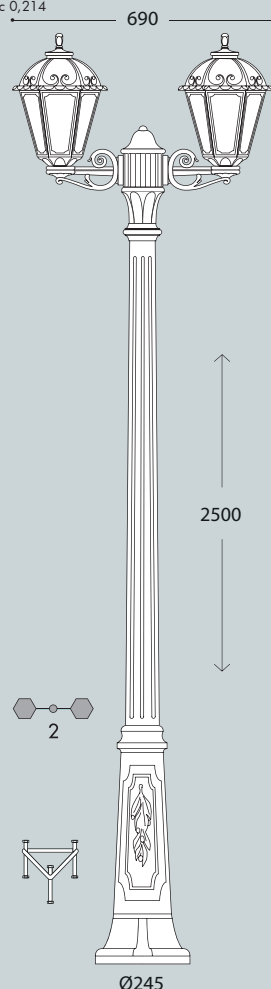

**RICU BISSO/SALEM 3L**

|                       |                 |
|-----------------------|-----------------|
| <b>E27</b> lampholder | K26.157.S30.E27 |
| <b>6,5W</b> filament  | K26.157.S30.F1R |
| <b>8,5W</b> CCT set   | K26.157.S30.V1K |
| <b>11W</b> CCT set    | K26.157.S30.T1K |

Pcs 1  
Kg 15,2  
mc 0,214

