

LUIGI 500 GX53 LED


HIGH-BAY

High-bay luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied with flat diffuser granting no upward light emission and complete with hook for hanging. Equipped with TÜV approved, long-life and efficient **GX53 LED modular system** in different wattages. Insulation class II, Protection rating IP65.

Riflettore industriale realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto e completo di gancio di sospensione. Provvisto di sistema modulare a LED GX53 approvato TÜV di lunga durata ed alta efficienza disponibile in diverse potenze. Classe di isolamento II, grado di protezione IP65.



L5F.128.D9L

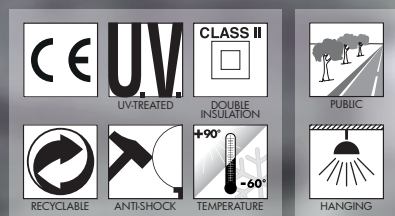

LUIGI 500 GX53 LED - COMPONENTS

IP65



HANGING HOOK made of shockproof resin material, UV-rays stabilized, rust and corrosion-free

GANCIO per sospensione, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

TETTO in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.



DIFFUSER with flat shape made of UV-rays stabilized polycarbonate (PC) and available in clear and opal colour.

DIFFUSORE con configurazione piatta realizzato in policarbonato (PC) stabilizzato ai raggi UV e disponibile in colore trasparente o opale.



Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

LUIGI 500 GX53 LED

L5F.128 *



Dimensions and weight

Height: 380 mm
Diameter: 600 mm
Weight: 6,4 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,0982

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

*ADD. SUFFIX

High-bay supplied with white resin **CEILING** provided with TÜV approved, long-life and efficient **9x GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.



9x 7W
63W

7200 Lm

4000 K .C9L

3000 K .C9R

9x 10W
90W

10800 Lm

4000 K .D9L

3000 K .D9R


LED LAMPS



More technical details about TÜV approved Fumagalli LED Lamps on page 512.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE


PHOTOMETRIC DATA SAMPLE

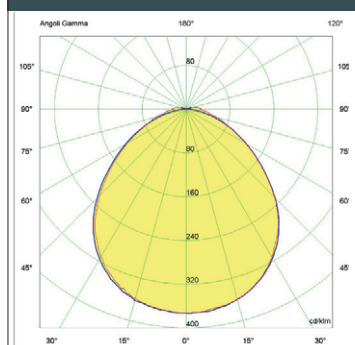

(6x10W)	middle illumination (lux)
1mt	1848
2mt	486
3mt	220
4mt	124
5mt	79
6mt	55
7mt	34
8mt	41
9mt	24
10mt	19

LUIGI 500 GX53 LED


SAVE -45%



**9x10W GX53 LED
90W**

(power consumption)

HQI 150W



**HQI 150W
165W**

(power consumption)

LUIGI 400 LED


HIGH-BAY



LUIGI 400-DR HIGH POWER LED

L41.128.H1L **50W** L41.128.H1R


L41.128.Q1L **30W** L41.128.Q1R

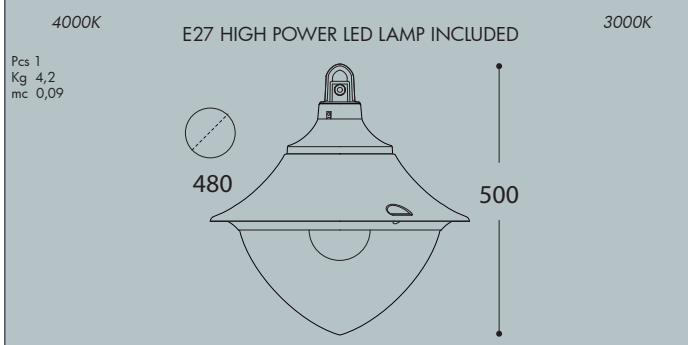

LUIGI 400 GX53

L4F.128.C6L **42W** L4F.128.C6R


L4F.128.D6L **60W** L4F.128.D6R

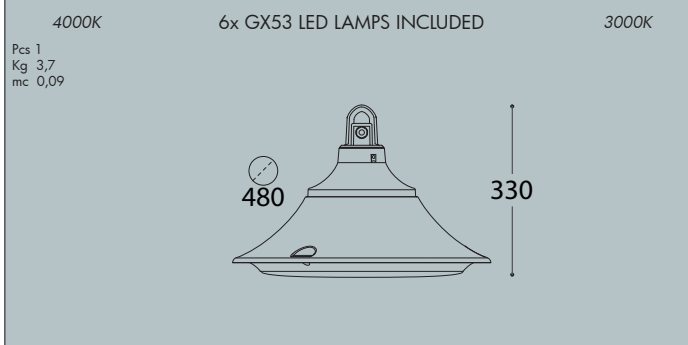

LUIGI 500 GX53

L5F.128.C9L **63W** L5F.128.C9R


L5F.128.D9L **90W** L5F.128.D9R

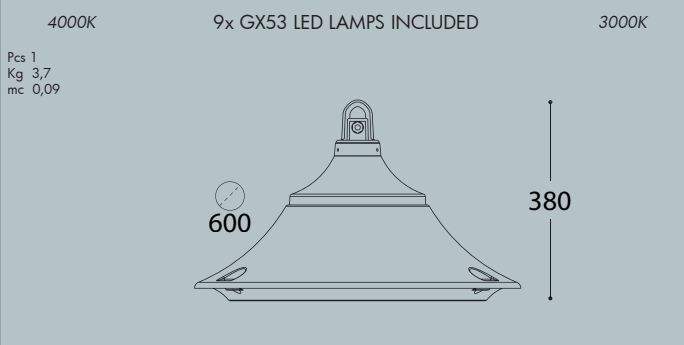

MARIO/ECOVIVI400 GX53

EV4.129.C6L **42W** EV4.129.C6R


EV4.129.D6L **60W** EV4.129.D6R

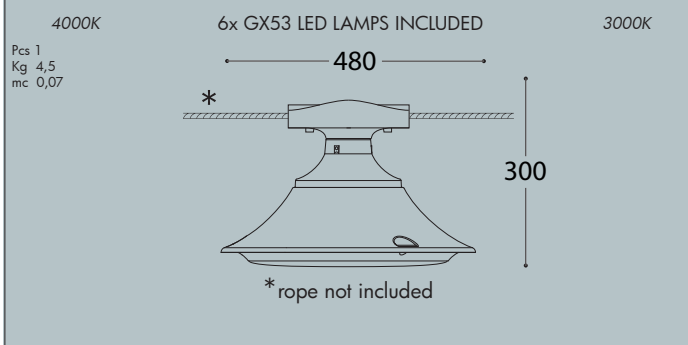

MARIO/ECOVIVI500 GX53

EV6.129.C9L **63W** EV6.129.C9R


EV6.129.D9L **90W** EV6.129.D9R

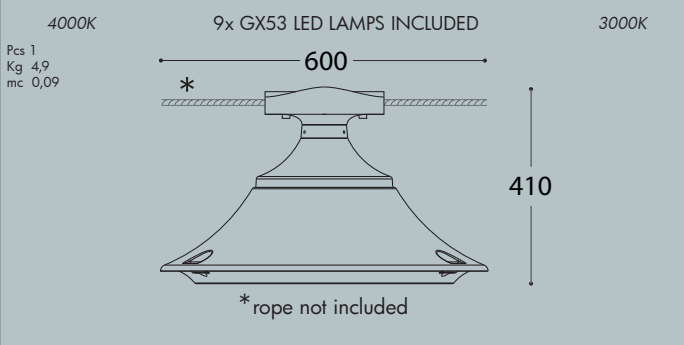

NEW LOT/ECOVIVI400 GX53

EV4.115.C6L **42W** EV4.115.C6R

EV4.115.D6L **60W** EV4.115.D6R

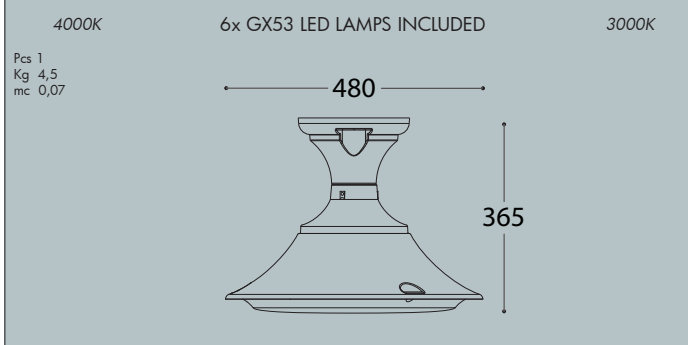

NEW LOT/ECOVIVI500 GX53

EV6.115.C9L **63W** EV6.115.C9R

EV6.115.D9L **90W** EV6.115.D9R

