

ECOBEPPE 500 GX53 LED

GRAND SIZE






Modern luminaries made in shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di **sistema modulare a LED GX53 con Kelvin regolabile** certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.*

EP6.000.D9K

CCT SETTABLE



MADE IN ITALY

ECOBEPPE 500 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

***TETTO** completo di pinnacolo decorativo in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione*

DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

***DIFFUSORE** con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC), stabilizzato ai raggi UV.*

CAGE for post top installation complete with connection ring (one piece only) to be fixed on the luminaries diffuser.

***BIPODE** in un unico pezzo completo di anello di connessione da fissare sul diffusore dell'apparecchio.*

ECOBEPPE 500 GX53 LED

EP6.000 *



Dimensions and weight

Height: 850 mm
Diameter: 600 mm
Weight: 8,1 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure: CxS = m² 0,246

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear

GX53 LED



- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with TÜV-CB certified, long-life, efficient and 9x Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	9x 10W 90W	11610 Lm	6500 K	.D9K
			4000 K	
			3000 K	

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE



**ECOBEPPE 500 GX53 LED
9X10W**

POST height 5mt
10x10mt area: average 31 lux

The photometric data for all the versions are available upon request or on our website.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ECOBEPPE 500


GRAND SIZE



MADE IN
ITALY

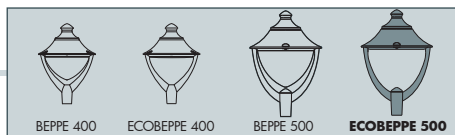

EKTOR 6000/ECOBEPPE500
EP6.384.000

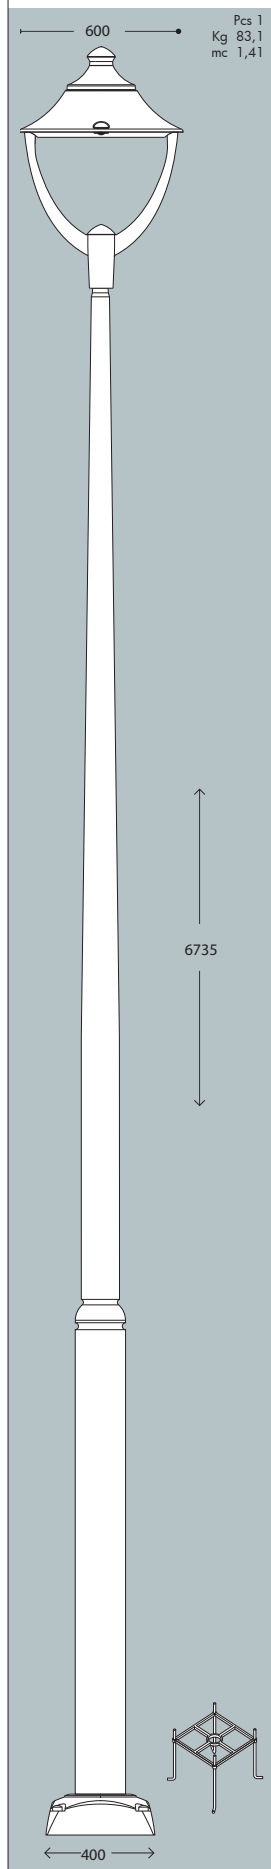

EKTOR 5000/ECOBEPPE500
EP6.377.000

Pcs 1
Kg 53,6
mc 0,48

AKILLE 5000/ECOBEPPE500
EP6.427.000

EKTOR 4500/ECOBEPPE500
EP6.374.000

Pcs 1
Kg 48,1
mc 0,46

AKILLE 4500/ECOBEPPE500
EP6.424.000

600

5735
5235

EKTOR5000

AKILLE4500

Ø 265

600

4735
4235
3735

EKTOR4000

AKILLE3500

Ø 265

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

EKTOR 4000/ECOBEPPE500
EP6.371.000

Pcs 1
Kg 42,6
mc 0,43

AKILLE 4000/ECOBEPPE500
EP6.421.000

EKTOR 3500/ECOBEPPE500
EP6.367.000

Pcs 1
Kg 39,2
mc 0,40

AKILLE 3500/ECOBEPPE500
EP6.417.000

600

4735
4235
3735

EKTOR4000

AKILLE3500

Ø 265

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600

600


600

600


600

600

ECOBEPPE500
EP6.000

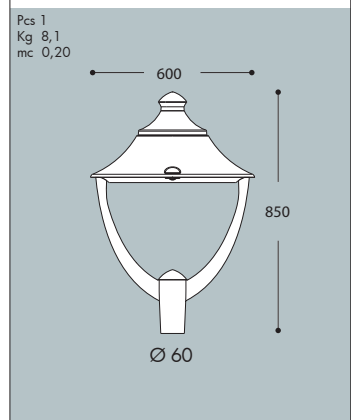

PILAR/ECOBEPPE500
EP6.253

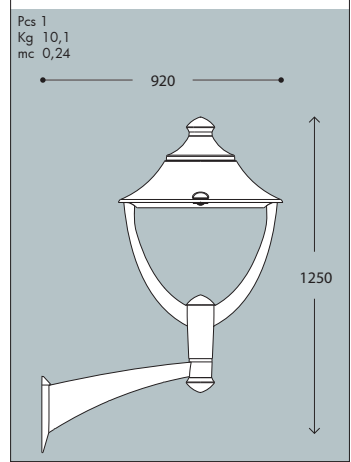

NEW LOT/ECOBEPPE500
EP6.115

