

ECOVIVI 500 GX53 LED

GRAND SIZE




Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Supplied with flat diffuser granting no upward light emission. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819 – Installation area: Zone 1). Insulation class II, Protection rating IP55.

Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Fornito con diffusore piatto per garantire assenza di emissioni di luce verso l'alto. Provvisto di sistema modulare a LED GX53 con Kelvin impostabile certificato TÜV -CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819 – Area di installazione: Zona 1). Classe di isolamento II, grado di protezione IP55.



EV6.000.D9K

CCT SETTABLE



MADE IN ITALY

ECOVIVI 500 GX53 LED - COMPONENTS

IP55



ROOF made of shockproof resin material one piece only, UV-rays stabilized, rust and corrosion-free.

***TETTO** in un unico pezzo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*



DIFFUSER with flat shape to avoid the skyward dispersion of the luminous flux, according to the international regulations against light pollution and in particular the standard UNI 108119. Made of UV-rays stabilized polycarbonate (PC).

***DIFFUSORE** con configurazione piatta per evitare la dispersione verso il cielo del flusso luminoso, in ottemperanza alle norme internazionali sull'inquinamento luminoso ed in particolare la norma UNI 10819. Realizzato in policarbonato (PC), stabilizzato ai raggi UV.*



Decorative connection **RING** to be fixed on the luminaries diffuser.

***ANELLO** decorativo di connessione da fissare sul diffusore dell'apparecchio.*



ECOVIVI 500 GX53 LED

EV6.000 *



Dimensions and weight

Height: 300 mm
Diameter: 600 mm
Weight: 6,7 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,0982

Moulded colours:

Black White Grey

Diffuser PC (UV treated):

Clear

GX53 LED




- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin **CEILING** provided with 9x TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included**. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V



LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	9x 10W 90W	11610 lm	6500 K	.D9K
			4000 K	
			3000 K	

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE




**ECOVIVI 500 GX53 LED
9X10W**









POST height 5mt
10x10mt area: average 38 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

ECOVIVI 500 GRAND SIZE

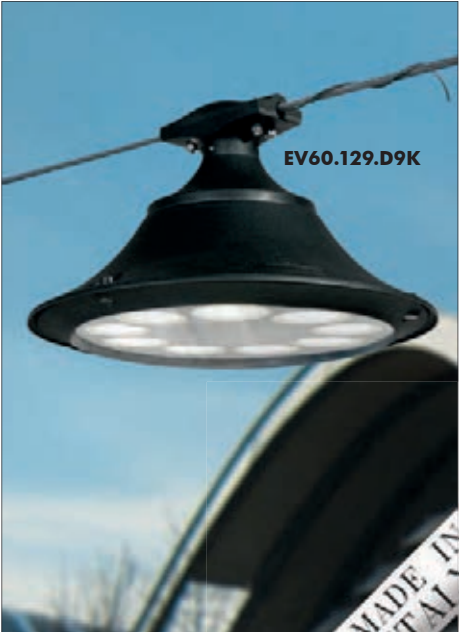

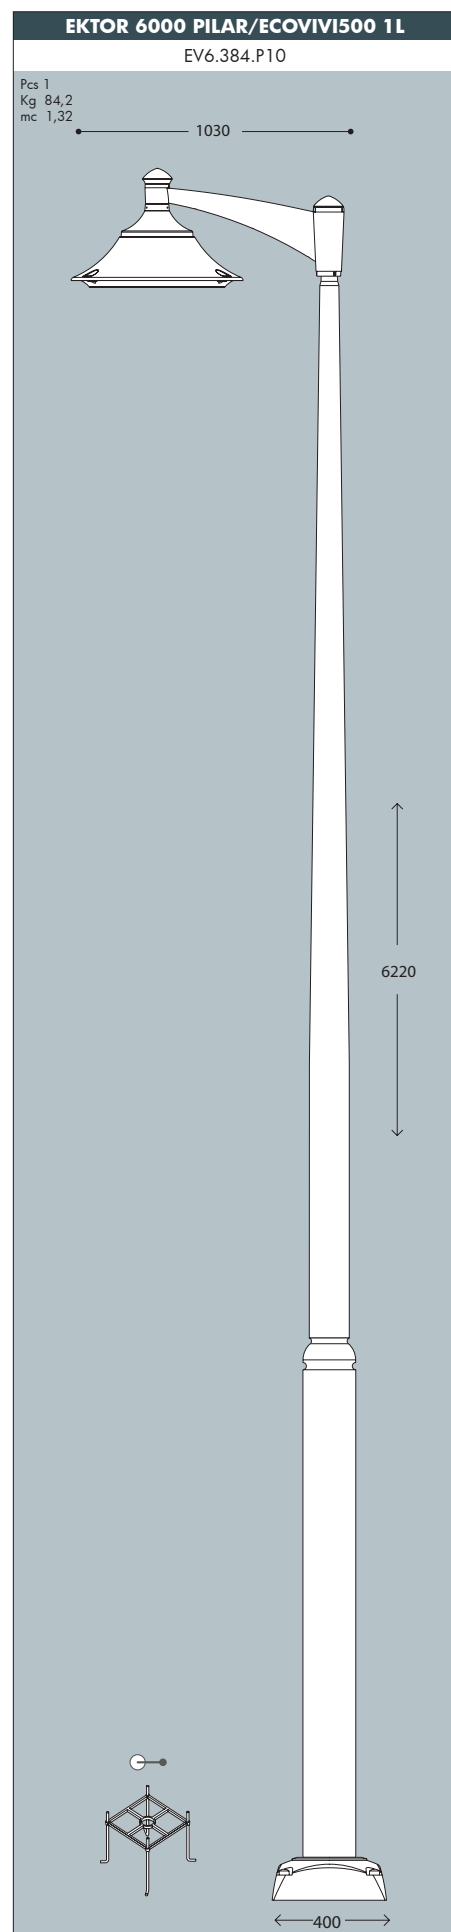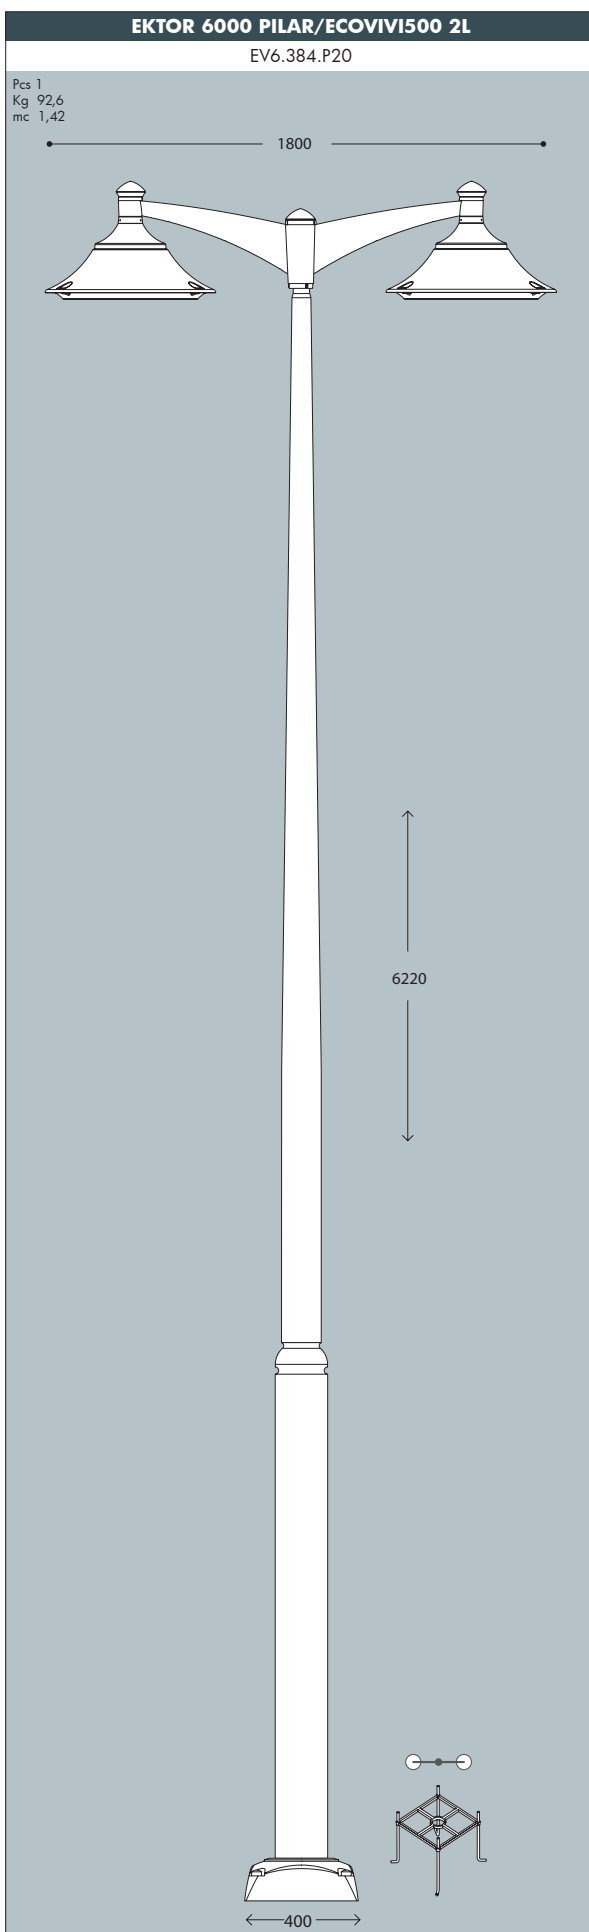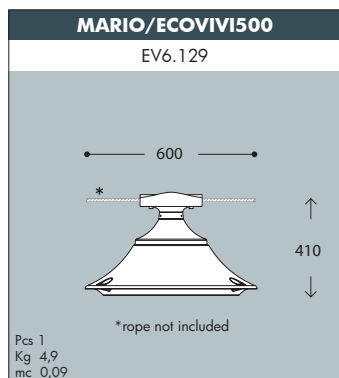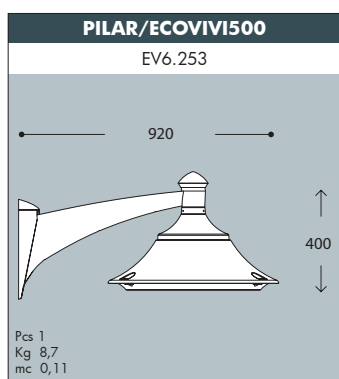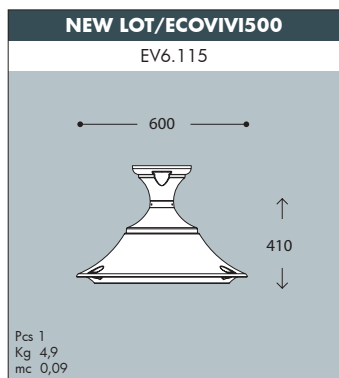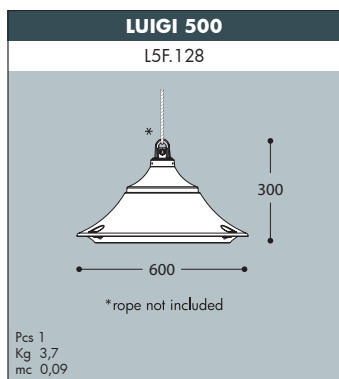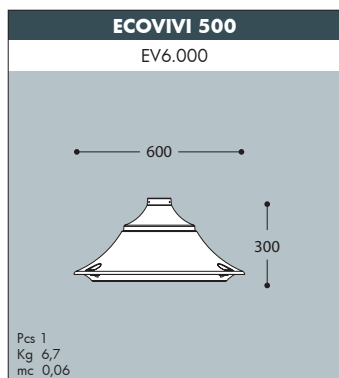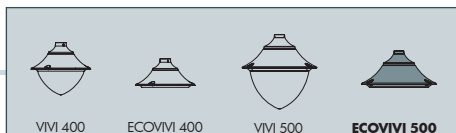


ECOVIVI 500

GRAND SIZE



MADE IN ITALY

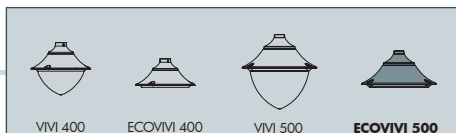

EKTOR 5000 PILAR/ECOVIVI500 1L	AKILLE 5000 PILAR/ECOVIVI500 1L
EV6.377.P10	EV6.427.P10
Pcs 1 Kg 54,7 mc 0,39	
EKTOR 4500 PILAR/ECOVIVI500 1L	AKILLE 4500 PILAR/ECOVIVI500 1L
EV6.374.P10	EV6.424.P10
Pcs 1 Kg 49,2 mc 0,37	
EKTOR 4000 PILAR/ECOVIVI500 1L	AKILLE 4000 PILAR/ECOVIVI500 1L
EV6.371.P10	EV6.421.P10
Pcs 1 Kg 43,7 mc 0,35	

1030

AKILLE5000

EKTOR4000

5220
4520
4220

Ø 265

EKTOR 5000 PILAR/ECOVIVI500 2L	AKILLE 5000 PILAR/ECOVIVI500 2L
EV6.377.P20	EV6.427.P20
Pcs 1 Kg 63,1 mc 0,49	
EKTOR 4500 PILAR/ECOVIVI500 2L	AKILLE 4500 PILAR/ECOVIVI500 2L
EV6.374.P20	EV6.424.P20
Pcs 1 Kg 57,6 mc 0,47	
EKTOR 4000 PILAR/ECOVIVI500 2L	AKILLE 4000 PILAR/ECOVIVI500 2L
EV6.371.P20	EV6.421.P20
Pcs 1 Kg 52,1 mc 0,45	

1800

AKILLE5000

EKTOR4000

5220
4520
4220

Ø 265