

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

EXTRALETI 200

SURFACE LAMP




Surface wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.

*Lampada a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa **lampadina a LED GX53 con Kelvin impostabile** certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.*



EXTRALETI 200
4S1.000



EXTRALETI 200-GL
4S2.000



EXTRALETI 200-RS
4S3.000



EXTRALETI 200-HS
4S4.000



EXTRALETI 200-VP
4S5.000



4S1.000.G1K

CCT SETTABLE



3000 K

4000 K

6500 K

SDCM <6



MADE IN ITALY

EXTRALETI 200 - COMPONENTS

IP 66




COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

***COVER** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*



Opal DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA).

***DIFFUSORE** opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*



High quality silicone rubber **GASKET** to ensure high protection against external agents.

***GUARNIZIONE** in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*



BODY made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53** led lamp.

***CORPO** realizzato in resina antiurto, stabilizzata ai raggi UV, adatto ad alloggiare gli accessori elettrici. Fornito completo di lampadina led **GX53**.*

EXTRALETI 200



Dimensions and weight

Height: 120 mm
Width: 200 mm
Depth: 65/85 mm
Weight: 0,7 Kg

Moulded colours:

☒ Black ☐ White ☐ Grey

Diffuser PMMA:

☐ Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED


100 - 240 V




LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	

Surface lamp supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.

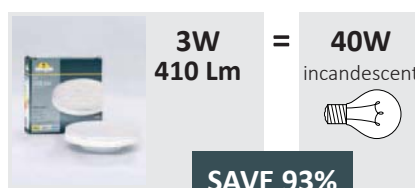

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

EXTRALETI 200

SURFACE LAMP



EXTRALETI 200 4S1.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-GL 4S2.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-RS 4S3.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-HS 4S4.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

EXTRALETI 200-VP 4S5.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12