

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

FRANCY-OP


RECTANGULAR



Bulkhead lamp with no visible screws and front light emission. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Complete with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamps included** or provided with **E27** lampholder. Version with motion sensor available. Insulation class II, Protection rating IP66.



FRANCY-OP
2A1.000




Plafoniera senza viti a vista con emissione della luce frontale. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Completa di lampadine a LED GX53 con Kelvin impostabile certificate TÜV-CB di lunga durata ed elevata efficienza o fornita nella versione E27. Disponibile anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.




2A1.000

CCT SETTABLE







FRANCY-OP - COMPONENTS

IP 66



COVER with no visible screws made of shockproof resin material UV-rays stabilized. Designed for getting front light emission.

COVER senza viti a vista realizzata in resina antiurto, stabilizzata ai raggi UV. Disegnata per ottenere un'emissione frontale della luce.



DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA) screwed to the bulkhead base.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare alla base della plafoniera.



BASE made of shockproof resin material, UV-rays stabilized, suitable for the electrical devices fixation. Provided with E27 or with 2x GX53 lampholders and complete with silicone rubber gasket to ensure high protection against external agents.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di portalampada E27 o di 2 portalampada GX53. Completa di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

FRANCY-OP



Dimensions and weight

Width: 130 mm
Height: 300 mm
Depth: 85 mm
Weight: 0,6 Kg

Moulded Colours:

Black Grey White

Diffuser PMMA:

Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 636.

GX53 LED



FULLY PRE-WIRED

Bulkhead supplied **fully pre-wired** complete with 2 x TÜV-CB certified long-life, efficient and Kelvin settable **GX53 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.


100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
(*)	2x 3W 6 W	820 lm	6500 K 4000 K 3000 K	.G2K

2x 3W = 60W
820 Lm = incandescent

SAVE 93%

CCT SETTABLE LED LAMP (*)

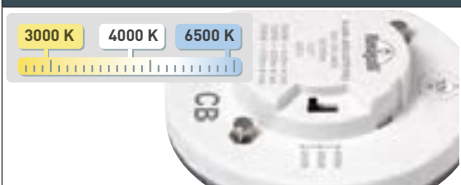

E27



FULLY PRE-WIRED

Bulkhead supplied **fully pre-wired** with E27 lampholder. Provided as an option with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use.

E27 (CFL-LED)	max 160 mm	*ADD. SUFFIX
	↔	.E27

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
(*)	6,5 W	800 lm	2700 K	.F1R
(*)	8,5 W	920 lm	6500 K 4000 K 3000 K	.V1K

E27 with sensor



FULLY PRE-WIRED

Bulkhead supplied **fully pre-wired** with E27 lampholder and E27 LED lamps as an option. Complete with microwave daylight and motion **sensor**. Sensor operating voltage: 220-240V. (120V version available on demand).

E27 (CFL-LED)	max 160 mm	*ADD. SUFFIX
	↔	.ES7

LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
(*)	6,5 W	800 lm	2700 K	.S1R
(*)	8,5 W	920 lm	6500 K 4000 K 3000 K	.VSK

6,5W filament = 60W incandescent

8,5W CCT = 60W incandescent

SAVE up to 89%


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

FRANCY-OP

RECTANGULAR



MADE IN ITALY

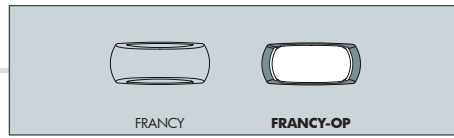

FRANCY-OP GX53	
2x3W	2A1.000.G2K
2 CCT SETTABLE GX53 LED LAMPS INCLUDED 3000K/4000K/6500K	
<p>Pcs 24 Kg 17,2 mc 0,12</p>	

FRANCY-OP E27	
6,5W filament	2A1.000.F1R
8,5W CCT set	2A1.000.V1K
<p>Pcs 24 Kg 15,7 mc 0,12</p>	
E27 lampholder	2A1.000.E27
E27 with sensor	2A1.000.ES7