

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

GINO 400 GX53 LED

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system** in different wattages. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza disponibile in diverse potenze. Classe di isolamento II, grado di protezione IP55.*

F50.000.D6K



CCT SETTABLE



SDCM <6


3000 K

4000 K

6500 K



MADE IN ITALY



GINO 400 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***TETTO** completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

***DIFFUSORE** realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, disponibile in colore trasparente o opale.*

Decorative connection **RING** to be fixed on the luminaries diffuser.

***ANELLO** decorativo di connessione da fissare sul diffusore dell'apparecchio.*

BASE made in shockproof resin material consisting of a support for post top installation (Ø 60mm) and of a white resin CONE REFLECTOR, to direct downwards the lighting output.

***BASE** dell'apparecchio realizzata in resina antiurto composta da un supporto per permettere il fissaggio dell'apparecchio a palo (Ø 60mm) e da un CONO riflettente in resina bianca per indirizzare verso il basso il flusso luminoso.*

GINO 400 GX53 LED

F50.000 *



Dimensions and weight

Height: 715 mm
Diameter: 480 mm
Weight: 5,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,157

Moulded colours:

☒ Black ☐ White ☐ Grey

Diffuser PMMA:

☒ Clear ☐ Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED




- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6X TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.


100 - 240 V				
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	6x 10W 60W	7740 lm	6500 K	.D6K
			4000 K	
			3000 K	

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

PHOTOMETRIC DATA SAMPLE

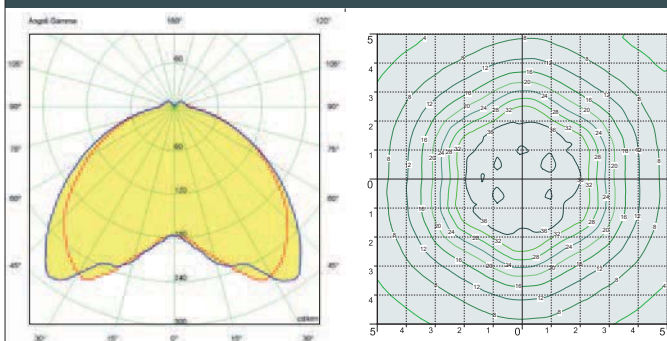

GINO 400 GX53 LED
6X10W


POST height 3,5mt
10x10mt area: average 34 lux


The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GINO 400

LARGE SIZE

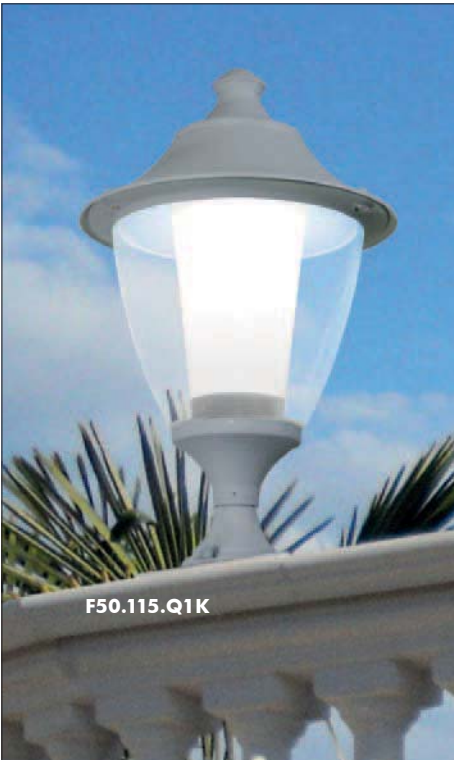



MIDIPILAR/GINO400
F50.254

Pcs 1
Kg 6,4
mc 0,09

NEW LOT/GINO400
F50.115

Pcs 1
Kg 6,1
mc 0,07

GINO400
F50.000

Pcs 1
Kg 5,8
mc 0,06

EKTOR 2500/GINO400
F50.361.000

Pcs 1
Kg 30,1
mc 0,21

EKTOR 3000/GINO400
F50.364.000

AKILLE 3000/GINO400
F50.414.000

Pcs 1
Kg 33,5
mc 0,24

EKTOR 3500/GINO400
F50.367.000

AKILLE 3500/GINO400
F50.417.000

Pcs 1
Kg 26,9
mc 0,26

EKTOR 4000/GINO400
F50.371.000

AKILLE 4000/GINO400
F50.421.000

Pcs 1
Kg 40,3
mc 0,29