

GIUSEPPE

FLOODLIGHT

Square floodlight with no visible screws made of shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for wall, ceiling and post installation. Supplied with TÜV-CB certified, long-life, efficient **Kelvin & Power settable GX53 LED lamps included** or provided with 2x E27 lampholders. Motion sensor version available. Insulation class II, Protection rating IP66.



GIUSEPPE
4P1.000
4P2.000

*Proiettore quadro senza viti a vista, fabbricato in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a soffitto e a palo. Fornito con **include lampadine a LED GX53 con Kelvin e Potenza impostabile** certificate TÜV-CB di lunga durata ed elevata efficienza o disponibile nella versione 2x E27, anche con sensore di movimento. Classe di isolamento II, grado di protezione IP66.*



4P2.000.D4K

CCT SETTABLE



2700 K
3000 K
4000 K
6500 K

SDCM <6



MADE IN
ITALY

GIUSEPPE - COMPONENTS

IP 66



COVER with no visible screws, made of shockproof resin material, UV-rays stabilized.

COVER senza viti a vista in resina antiurto stabilizzata ai raggi UV.

DIFFUSER made of UV-rays stabilized polymethyl-methacrylate (PMMA) screwed to the floodlight body.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV da avvitare al corpo del proiettore.

BODY made of shockproof resin material, UV-rays stabilized, provided with silicone rubber gasket to ensure high protection against external agents.

CORPO realizzato in resina antiurto, stabilizzata ai raggi UV, completa di guarnizione in gomma silconica per garantire un alto livello di protezione contro gli agenti esterni.

GIUSEPPE



Dimensions and weight

Height: 150 mm

Width: 300 mm

Weight: 2,8 Kg

Moulded Colours:

☒ Black ☒ Grey ☐ White

Diffuser PMMA:

☐ Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

4x GX53 LED

FULLY
PRE-WIRED




4P2.000

Floodlight supplied **with white resin reflective ceiling fully pre-wired** and complete with 4 x TÜV-CB certified long-life efficient and **Kelvin settable GX53 LED lamps included**. Quick and easy lamp replacement for a very simple maintenance after installation.


100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	4x 10W 40W	5160 lm	6500 K	.D4K
			4000 K	
			3000 K	



4x 10W = 100W
5160 lm SON-HQI

SAVE 60%



GX53 LED

FULLY
PRE-WIRED



4P1.000

Floodlight supplied **fully pre-wired** and complete with TÜV approved, long-life, efficient, **Kelvin and Power settable GX53 LED lamp** in different wattages.



100 - 240 V

LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
	15 W	1940 lm	4000 K	.E1P
	9 W eco mode	1300 lm	2700 K	
			4000 K	
	15 W + SENSOR	1940 lm	4000 K	.ESP
	9 W eco mode + SENSOR	1300 lm	2700 K	
			4000 K	



15W-9W = 150W-100W
incandescent

SAVE 90%



2x E27

FULLY
PRE-WIRED



4P2.000


Floodlight supplied **fully pre-wired** with white resin reflective ceiling and complete with **2x E27 lamp holders**. Daylight and motion sensor available as option. Sensor operating voltage: 220-240V. (120V version available on demand).

		*ADD. SUFFIX
2x E27 (CFL -LED)	max 160 mm	.E28
2x E27 + SENSOR	max 160 mm	.ES8

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GIUSEPPE FLOODLIGHT





GIUSEPPE GX53




15W/9W

4P1.000.E1P

40W

4P2.000.D4K

CCT SETTABLE GX53 LED LAMPS INCLUDED

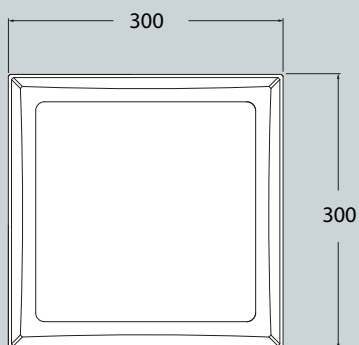

Pcs 10
Kg 29
mc 0,195




GIUSEPPE 2xE27

2xE27 lampholder

4P2.000.E28

2xE27 with sensor

4P2.000.ES8

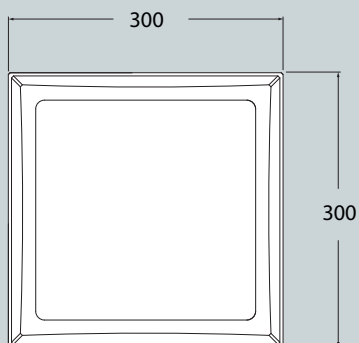

Pcs 10
Kg 19
mc 0,195

BOLLARD VERSION



Detailed information on page 192.