MINITOMMY

FLOODLIGHT

LED floodlight with single or double lights made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for indoor and outdoor installations on wall and ceilings, in the ground or on spikes. Ring or eyelid cover versions available with no visible screws. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. The floodlight is fully adjustable and it can tilt and turn at will. Insulation class II, Protection rating IP66.

*Proiettore a LED a luce singola o doppia fabbricato in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Idoneo per installazioni a parete, a soffitto, al suolo o su picchetto, sia in ambienti esterni che interni. Cover ad anello o a palpebra senza viti a vista. Fornito nella versione standard con **inclusa lampadina a LED GU10 con Kelvin impostabile** certificata TÜV-CB di lunga durata ed elevata efficienza. Il proiettore è completamente regolabile e si può inclinare e orientare a piacimento. Classe di isolamento II, grado di protezione IP66.*

MINITOMMY
1M1.000

MINITOMMY-EL
1M2.000

MINITOMMY 2L
3M1.000

MINITOMMY-EL 2L
3M2.000

1M1.001.U1K

CCT SETTABLE

2700 K 4000 K

SDCM <3

CE CB IECEE CB SCHEME UV-TREATED CLASS II DOUBLE INSULATION

RECYCLABLE ANTI-SHOCK +90° -60° TEMPERATURE

PUBLIC RESIDENTIAL INDOOR OUTDOOR

WALL CEILING SPIKE

MADE IN ITALY

MINITOMMY - COMPONENTS

IP66

COVER with no visible screws made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Ring or eyelid versions available.

COVER *senza viti a vista in resina antiurto stabilizzata ai raggi UV inattaccabile da ruggine e corrosione. Disponibile nella versione ad anello o a palpebra.*

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

DIFFUSORE *in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.*





Resin **BODY** suitable for the electrical devices fixation and resin **SUPPORT FORK** to allow a fully adjustable floodlight position.

CORPO *in resina predisposto per il fissaggio degli accessori elettrici e* ***FORCELLA*** *di supporto per permettere l'orientamento del proiettore.*

INSTALLATION ELEMENTS:
- ROTATION DISK for surface installation.
- SPIKE for in ground installation.
- CONNECTION FITTING for double lights version.

ELEMENTI DI FISSAGGIO:
- DISCO DI ROTAZIONE per l'istallazione a parete.
- PICCHETTO per l'istallazione nel terreno.
- SUPPORTO per la versione a luce doppia.

MINITOMMY

Dimensions and weight
Height:127 mm
Width: 122 mm
Weight: 0,45 Kg

Moulded Colours:
Black *Grey* *White*

Diffuser PC:
Frosted
Blue *Green* *Orange*

LED LAMPS

LVD EMC ERP

Comply with:EU2019/2015
EU2019/2020
Technical details on page 668.

GU10 LED

Recessed downlight luminaries supplied with TÜV-CB certified, long-life, efficient and **Kelvin settable GU10 LED lamp included**. Different wattages available. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING**: long-life and efficient LED light sources.
- **BUILT-IN DRIVER**: quick and easy lamp replacement.
- **GREAT FLEXIBILITY**: GU10 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES**: performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE**: built-in driver fully protected against heat and humidity by silicone paste.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
GU10 LED	2,9W	390 Lm	4000 K	.U1K
			2700 K	
GU10 LED	4,8W	625 Lm	4000 K	.L1K
			2700 K	

2.9W 390 lm = **35W** HALOGEN

SAVE 92%

4.8W 625 lm = **50W** HALOGEN

SAVE 91%

CCT SETTABLE LED LAMP



CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

** ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE*

MINITOMMY

FLOODLIGHT

MADE IN ITALY



MINITOMMY
FLOODLIGHT

MINITOMMY

2,9W	1M1.000.U1K
4,8W	1M1.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K



Pcs 30
Kg 12,6
mc 0,092

MINITOMMY SPIKE

2,9W	1M1.001.U1K
4,8W	1M1.001.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K



Pcs 30
Kg 13,8
mc 0,092

MINITOMMY 2L

2x2,9W	3M1.000.U2K
2x4,8W	3M1.000.L2K

2 CCT SETTABLE GU10 LED LAMPS INCLUDED
2700K/4000K

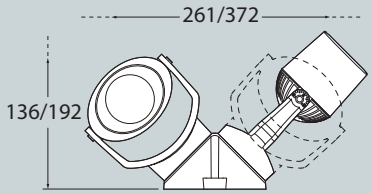

Pcs 18
Kg 16,2
mc 0,092

MINITOMMY 2L SPIKE

2x2,9W	3M1.001.U2K
2x4,8W	3M1.001.L2K

2 CCT SETTABLE GU10 LED LAMPS INCLUDED
2700K/4000K

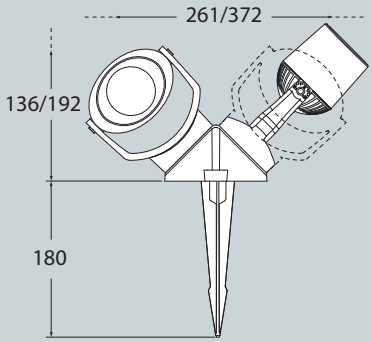

Pcs 18
Kg 17
mc 0,092

MINITOMMY-EL

FLOODLIGHT

MADE IN ITALY



MINITOMMY-EL
FLOODLIGHT

MINITOMMY-EL

2,9W	1M2.000.U1K
4,8W	1M2.000.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
2700K/4000K



Pcs 30
Kg 12,6
mc 0,092

MINITOMMY-EL SPIKE

2,9W	1M2.001.U1K
4,8W	1M2.001.L1K

CCT SETTABLE GU10 LED LAMP INCLUDED
273000K/4000K



Pcs 30
Kg 13,8
mc 0,092

MINITOMMY-EL 2L

2x2,9W	3M2.000.U2K
2x4,8W	3M2.000.L2K

2 CCT SETTABLE GU10 LED LAMPS INCLUDED
2700K/4000K

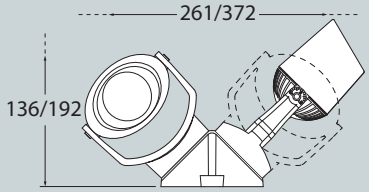

Pcs 18
Kg 16,2
mc 0,092

MINITOMMY-EL 2L SPIKE

2x2,9W	3M2.001.U2K
2x4,8W	3M2.001.L2K

2 CCT SETTABLE GU10 LED LAMPS INCLUDED
2700K/4000K

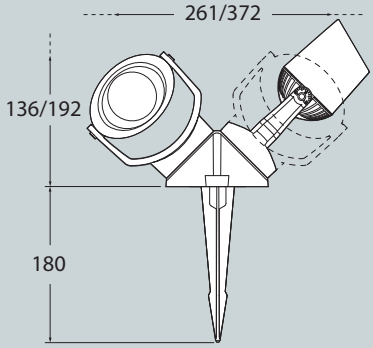

Pcs 18
Kg 17
mc 0,092