

PIETRO HIGH POWER LED

GRAND SIZE



Square lantern made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Modular construction suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Lantern quadra realizzata in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Provvista di soffitto riflettente progettato per accogliere la sorgente luminosa e fornita **completa di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

DRIVER SILICONE PROTECTION



U43.000.H1L

PIETRO HIGH POWER LED - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

***PINNACOLO** decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material. UV-rays stabilized.

***TETTO** realizzato in resina antiurto, stabilizzata ai raggi UV.*

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

***SOFFITTO** riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamпада E27 e provvisto di lampada a LED ad ALTA POTENZA. Progettato per accogliere e proteggere la sorgente luminosa garantendone una veloce e sicura installazione.*

DIFFUSER of UV-rays stabilized PMMA, with recess for a power supply cable. Provided with silicone rubber gasket to ensure high protection against external agents.

***DIFFUSORE** in PMMA resistente ai raggi UV, provvisto di sede per l'alloggiamento del cavo di alimentazione. Provvisto di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

CAGE in one piece only made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***GABBIA** realizzata in un unico pezzo e fabbricata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

PIETRO HIGH POWER LED

U43.000 *



Dimensions and weight

Height: 770 mm
Width: 430 mm
Depth: 430 mm
Weight: 7,5 Kg
Junction to support: diameter 60 mm
Area exposed to wind pressure:
CxS = m² 0,182

Moulded colours:

Black White

Painted colours:

Antique green Antique bronze

Diffuser PMMA:

Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern equipped with TÜV-CB certified, long-life, and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V



LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
E27 LED	50 W	6550 Lm	4000 K 3000 K	.H1L .H1R
E27 LED	60 W	7600 Lm	4000 K 3000 K	.W1L .W1R

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

PHOTOMETRIC DATA SAMPLE



PIETRO E27 LED HIGH POWER 50W

POST height 4,5mt
10x10mt area: average 21 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

PIETRO

GRAND SIZE



GIONA 5000/PIETRO	
U43.227	U45.227
GX53	
Pcs 1	430
Kg 67,5	
mc 1,112	

5710

400

GIONA 4000/PIETRO	GIONA 4500/PIETRO
U43.221	U43.224
U45.221	U45.224
GX53	
Pcs 1	Pcs 1
Kg 62,5	Kg 65,5
mc 0,862	mc 0,982

430

4710
5210

400

KARMEL 3500/PIETRO	KARMEL 4000/PIETRO
U43.234	U43.237
U45.234	U45.237
GX53	
Pcs 1	Pcs 1
Kg 38,6	Kg 42
mc 0,402	mc 0,453

430

4210
4710

Ø 275

LOT/PIETRO	
U43.113	U45.113
GX53	
Pcs 1	430
Kg 8,4	
mc 0,182	

940

Ø 190

KARMEL 3000/PIETRO	
U43.231	U45.231
GX53	
Pcs 1	430
Kg 33	
mc 0,362	

3710

Ø 275

PIETRO	
U43.000	U45.000
GX53	
Pcs 1	430
Kg 7,5	
mc 0,182	

770

Ø 60

TABOR/PIETRO	HOREB/PIETRO
U43.204	U43.207
U45.204	U45.207
GX53	
Pcs 1	Pcs 1
Kg 33	Kg 35,5
mc 0,362	mc 0,402

430

3710
4210

Ø 275

GIONA 4000/PIETRO

GRAND SIZE



MADE IN
ITALY



CEFA



SIMON




PIETRO

GIONA 4000 ARON/PIETRO 4L

U43.221.N40

GX53

U45.221.N40

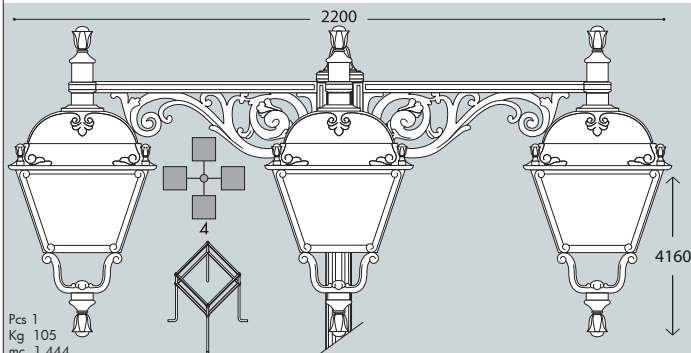


Pcs 1
Kg 105
mc 1,444

GIONA 4000 ARON/PIETRO 1L

U43.221.N10

GX53

U45.221.N10

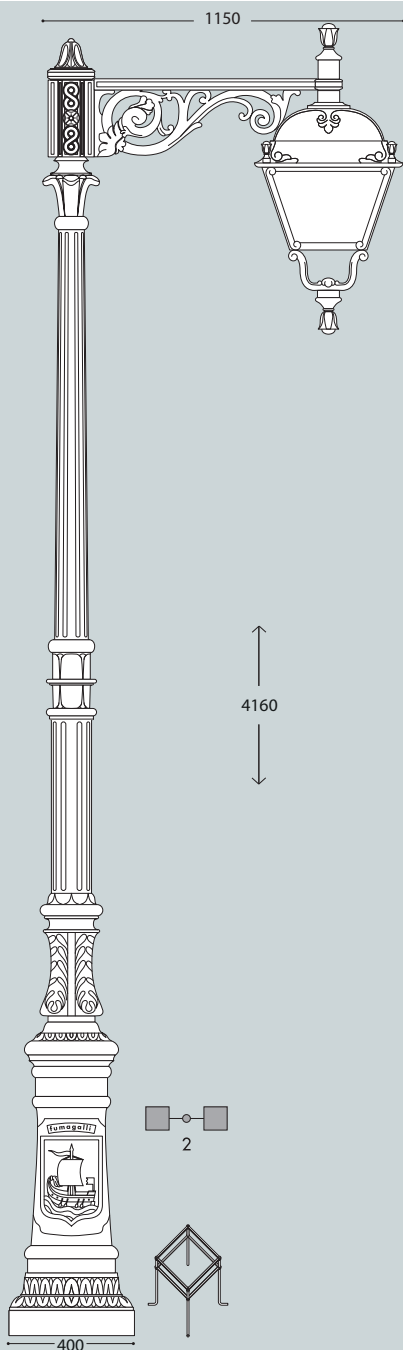


Pcs 1
Kg 72,5
mc 0,849

GIONA 4000 ARON/PIETRO 2L

U43.221.N20

GX53

U45.221.N20

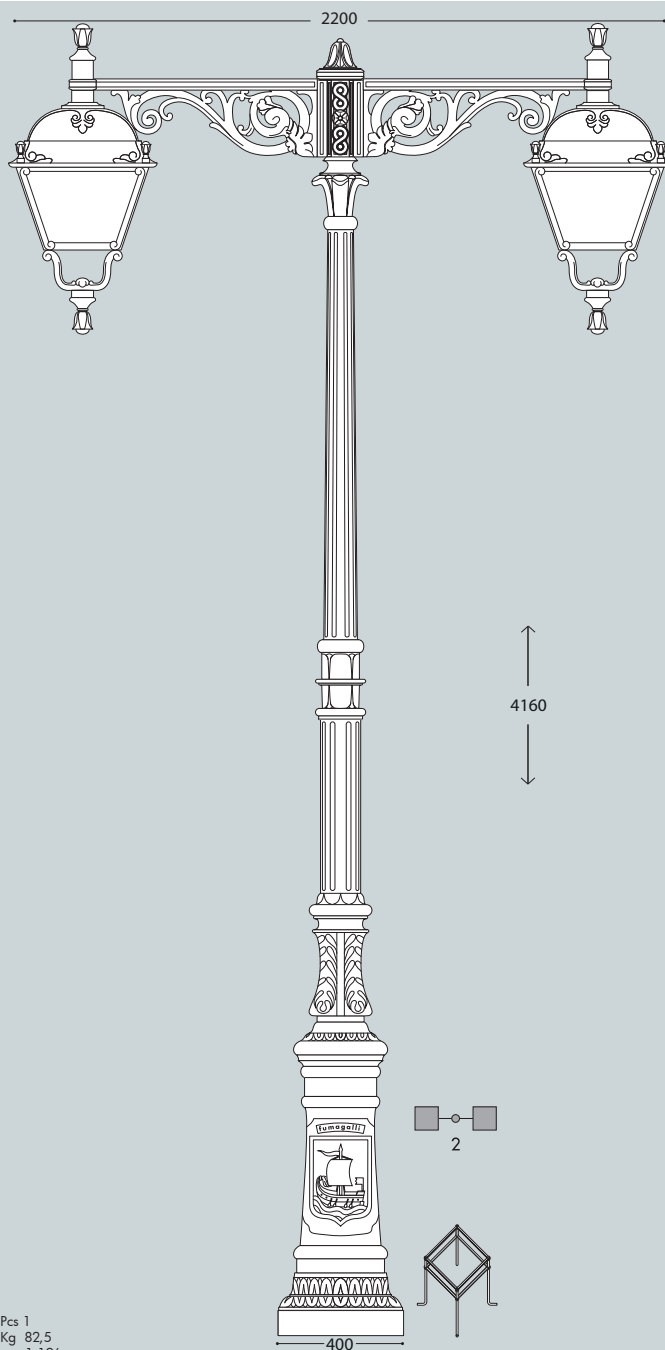


Pcs 1
Kg 82,5
mc 1,196

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

GIONA 4500-5000/PIETRO

GRAND SIZE

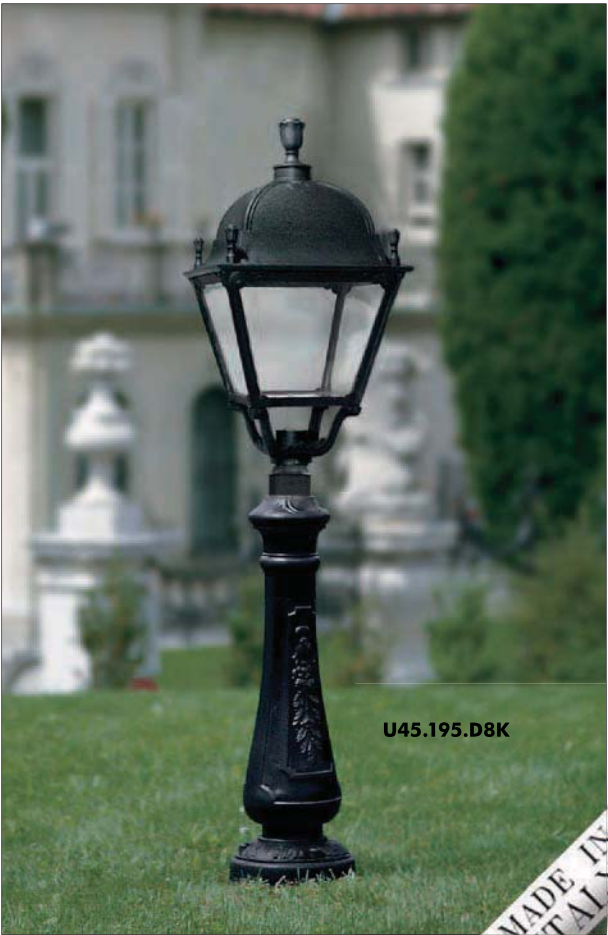

U45.195.D8K





CEFA



SIMON




W

GIONA 4500 ARON/ PIETRO 1L	GIONA 5000 ARON/ PIETRO 1L
-------------------------------	-------------------------------

U43.224.N10	U43.227.N10
GX53 U45.224.N10	U45.227.N10

Pcs 1
Kg 71,5
mc 0,949

Pcs 1
Kg 73,5
mc 1,191

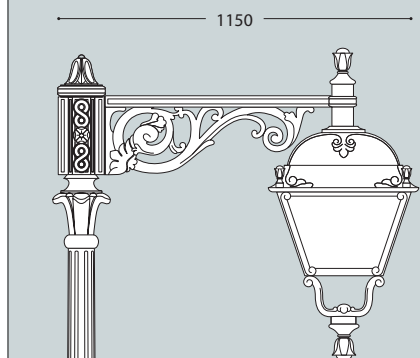

400



ARON/PIETRO

U43.172

U45.172

GX53

Pcs 1
Kg 13
mc 0,223

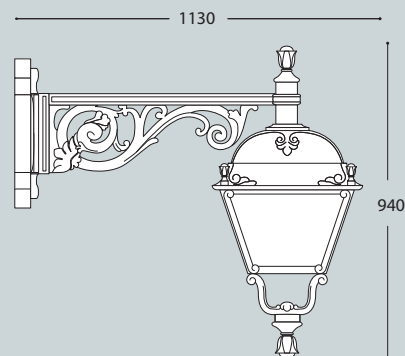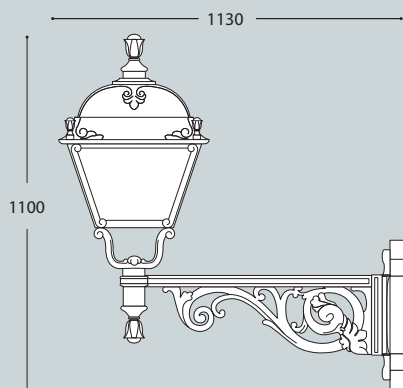


GIONA 4500 ARON/PIETRO 2L	GIONA 5000 ARON/PIETRO 2L
---------------------------	---------------------------

U43.224.N20	U43.227.N20
GX53 U45.224.N20	GX53 U45.227.N20

Pcs 1
Kg 82,5
mc 1,196

Pcs 1
Kg 84,5
mc 1,329

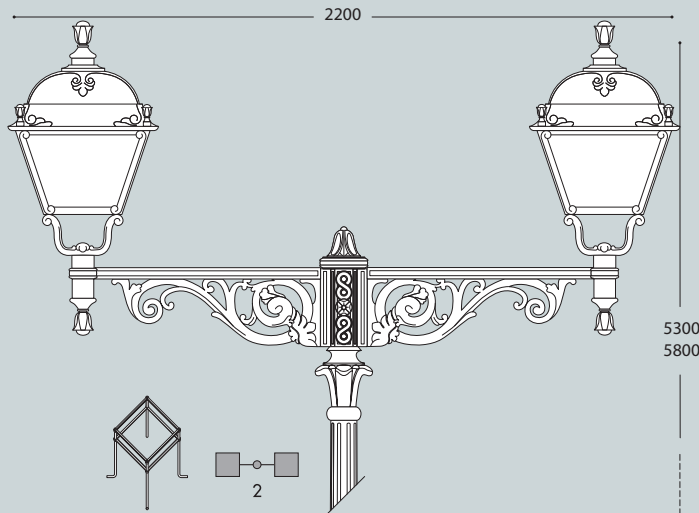

5800


GIONA 4500 ARON/PIETRO 4L	GIONA 5000 ARON/PIETRO 4L	ERMON.R/PIETRO resin
---------------------------	---------------------------	----------------------

U43.224.N40	U43.227.N40	U43.195
GX53 U45.224.N40	GX53 U45.227.N40	GX53 U45.195


Pcs 1
Kg 105
mc 1,444

Pcs 1
Kg 107
mc 1,605

Pcs 1
Kg 13,5
mc 0,250

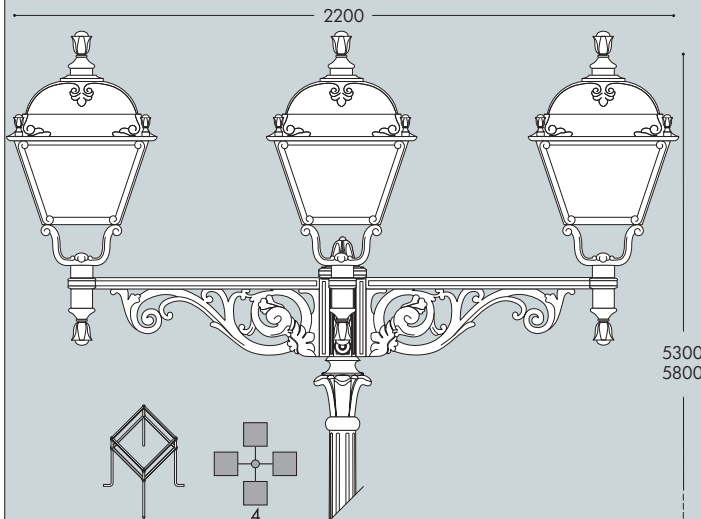

5800

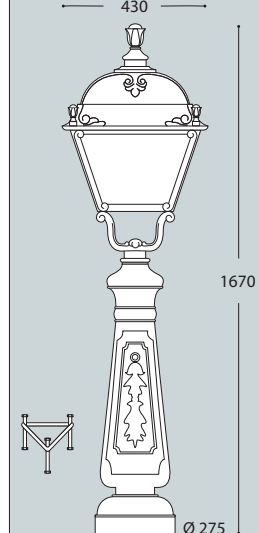

Ø 275