

REMO 400 GX53 LED

LARGE SIZE



Modern luminaries made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for post top or wall installation. Equipped with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED modular system**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo o a parete. Provvisto di **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Classe di isolamento II, grado di protezione IP55.*



R50.000.D6K

CCT SETTABLE




3000 K

4000 K

6500 K



MADE IN ITALY



REMO 400 GX53 LED - COMPONENTS

IP55



ROOF complete with decorative pinnacle made in shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO completo di pinnacolo decorativo, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

BASE made in shockproof resin material consisting of a support for post top installation (Ø 60mm) and of a white resin CONE REFLECTOR, to direct downwards the lighting output.

BASE dell'apparecchio realizzata in resina antiurto composta da un supporto per permettere il fissaggio dell'apparecchio a palo (Ø 60mm) e da un CONO riflettente in resina bianca per indirizzare verso il basso il flusso luminoso.

REMO 400 GX53 LED

R50.000 *



Dimensions and weight

Height: 715 mm
Diameter: 480 mm
Weight: 5,8 Kg
Junction to support: diameter 60 mm
Area expose to wind pressure:
CxS = m² 0,157

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED





- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries supplied with white resin CEILING provided with 6x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

100 - 240 V

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	6x 10W 60W	7740 lm	6500 K 4000 K 3000 K	.D6K

PHOTOMETRIC DATA SAMPLE



REMO 400 GX53 LED
6X10W

POST height 3,5mt
10x10mt area: average 34 lux

The photometric data for all the versions are available upon request or on our website.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.


* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

REMO 400

LARGE SIZE



MADE IN
ITALY

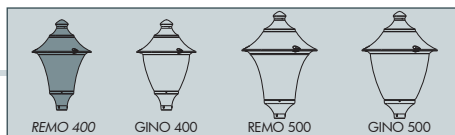

MIDIPILAR/REMO400
R50.254

Pcs 1
Kg 6,4
mc 0,09

NEW LOT/REMO400
R50.115

Pcs 1
Kg 6,1
mc 0,07

REMO400
R50.000

Pcs 1
Kg 5,8
mc 0,06

EKTOR 2500/REMO400
R50.361.000

Pcs 1
Kg 30,1
mc 0,21

EKTOR 3000/REMO400
R50.364.000

AKILLE 3000/REMO400
R50.414.000

Pcs 1
Kg 33,5
mc 0,241

EKTOR 3500/REMO400
R50.367.000

AKILLE 3500/REMO400
R50.417.000

Pcs 1
Kg 36,9
mc 0,268

EKTOR 4000/REMO400
R50.371.000

AKILLE 4000/REMO400
R50.421.000

Pcs 1
Kg 40,3
mc 0,294