

RITA


CLASSIC ROUND






Round bulkhead lamp in classic style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. **Kelvin & Power settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.



Plafoniera circolare in stile classico, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile nella versione a LED GX53 con Kelvin e Potenza impostabili o E27. Classe di isolamento II, grado di protezione IP66.

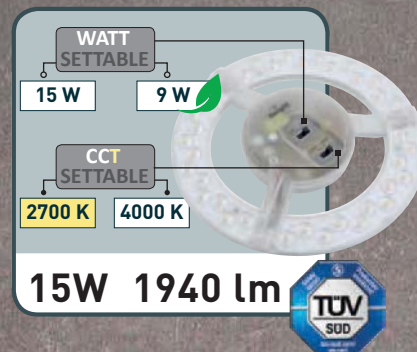

1T3.000.E1P

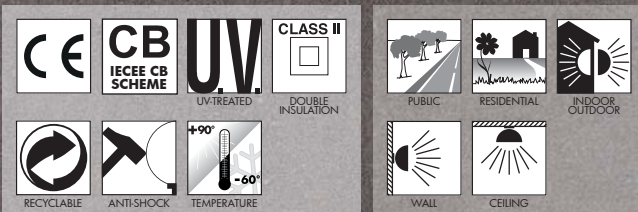

RITA COMPONENTS

IP 66



COVER with classic design made of shockproof resin material, UV-rays stabilized.

COVER in stile classico realizzata in resina antiurto stabilizzata ai raggi UV.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.

DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, UV-rays stabilized. Provided with GX53 lampholder or with white resin reflective plate and E27 lampholder.

BASE realizzata in resina antiurto, stabilizzata ai raggi UV. Fornita completa di portalam-pada GX53 o di piatto riflettente in resina bianca e portalam-pada E27.

RITA



Dimensions and weight

Diameter: Ø 355 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

☒ Black ☐ White

Painted colours:

☒ Antique green ☐ Antique bronze

Diffuser PMMA:

☐ Opal

GX53 LED

FULLY
PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient, Kelvin and Power settable GX53 LED lamp included.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** Quick and easy lamp replacement.
- **UNIFORM LIGHT:** No shadows on the diffuser.

100 - 240 V

LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
	15 W	1940 lm	2700 K	.E1P
			4000 K	
	9 W eco mode	1300 lm	2700 K	
			4000 K	



15W-9W = 150W-100W
incandescent

SAVE 90%



E27

FULLY
PRE-WIRED



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

*ADD. SUFFIX

E27 (CFL -LED)	max 160 mm ↔	.E27
E27 + SENSOR (CFL -LED)		.ES7

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

SETTABLE LED LAMP

POWER SETTABLE
15W



CCT SETTABLE



POWER switch settable in two different positions to select full power mode (15W) or eco mode (9W).

CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambience.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE


RITA


CLASSIC ROUND



1T3.000

MADE IN
ITALY

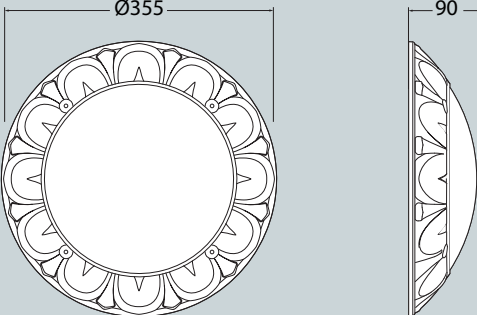RITA GX53	
15W/9W	1T3.000.E1P
CCT & POWER SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K	
	
Pcs	12
Kg	17,8
mc	0,198

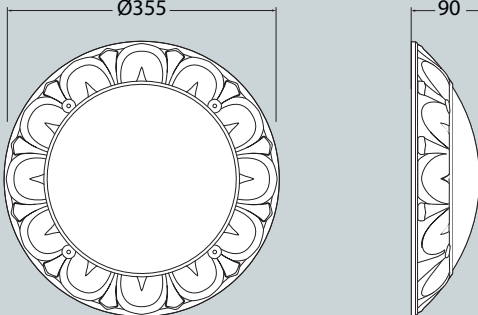RITA E27	
E27 lampholder	1T3.000.E27
E27 with sensor	1T3.000.ES7
	
Pcs	12
Kg	15,4
mc	0,198