

STEVEN

BOLLARD



LED bollard with modern design and directed light emission, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Dual use: suitable both for spike and ground installation. Supplied with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Insulation class II, protection rating IP67.

Bollard a led in stile moderno con emissione della luce direzionata, realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Doppia modalità di installazione al suolo, con picchetto o tasselli. Fornito con inclusa lampadina a LED G9, certificata TUV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP67.



ST1.531.Z1R





STEVEN - COMPONENTS

IP67



HOUSING made in shockproof resin material. Provided with G9 lampholder and watertight cable gland for a safe electrical devices connection.

***CASSA** realizzata in resina antiurto. Provvista di portalamпада G9 e pressacavo a tenuta stagna, per consentire una sicura connessione degli accessori elettrici.*

DIFFUSER made of shockproof resin material (PC) complete with silicone rubber gasket to ensure high protection against external agents. Frosted or coloured versions, to get a customized ambiance.

***DIFFUSORE** in resina antiurto (PC) completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni. Disponibile nella versione satinata o colorata, per ottenere un'ambientazione personalizzata.*

Frosted (X)

Green (N)

Orange (R)

Blue (U)



COVER with no visible screws made in shockproof resin material.

***COVER** senza viti a vista realizzata in resina antiurto.*



POLE in one piece only complete with spike. Made in shockproof resin material, UV rays stabilized, rust and corrosion free. Dual use: you can fix the spike outside the pole for in-ground installation, or inside the pole for surface installation with screws.

***PALO** in un unico pezzo completo di picchetto. Fabbricato in resina antiurto stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Duplice utilizzo: il picchetto può essere montato all'esterno del palo per installazione diretta nel terreno o al suo interno per installazione al suolo mediante tasselli di fissaggio.*

DUAL
USE

GROUND
INSTALLATION

SPIKE
INSTALLATION

STEVEN



Dimensions and weight

Diameter: 50 mm
Height: 450 mm
Weight: 0,65 Kg

Cover colours:


Black White Grey

Diffuser PC:

Frosted
Blue Green Orange

G9 LED

100 - 240 V

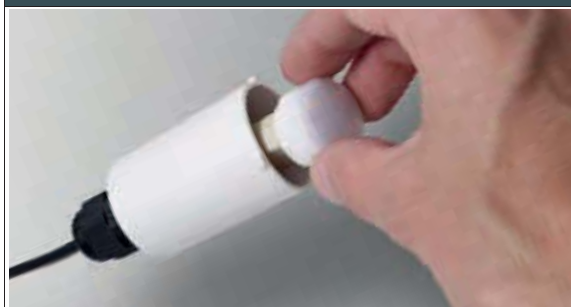


LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
	1,7 W	150 lm	4000 K	.Z1L
			3000 K	.Z1R

Bollard supplied as standard with TÜV-CB certified, long-life and efficient **G9 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** G9 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **100-240V:** wide voltage range to protect the driver from power surges.

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

* ADD THESE SUFFIXES TO THE REFERENCES
MENTIONED IN THE CATALOGUE

STEVEN
BOLLARD



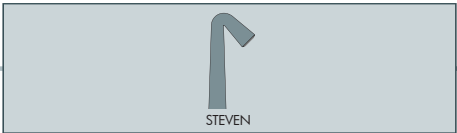

STEVEN		
ST1.531.Z1L	1,7W	ST1.531.Z1R
4000K	G9 LED LAMP INCLUDED	3000K
DUAL USE		
Pcs 10 Kg 8,5 mc 0,092		