

GARDEN REVIVAL
GARDEN CLASSIC
BOLLARD
UP&DOWN
DOWNLIGHT
IN-GROUND
BRICKLIGHT
FLOODLIGHT
BULKHEAD
SOLAR
URBAN CLASSIC
URBAN REVIVAL
URBAN MODERN
POST
LAMPS

UMBERTA EMERGENCY

LARGE ROUND



LED MAINTAINED EMERGENCY bulkhead lamp with no visible screws. Made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. In case of blackout, the bulkhead switches from Normal mode to Emergency mode and keeps on working. Minimum 3 hours battery operating time. Insulation class II, Protection rating IP66.

Plafoniera a LED, RETE PIU' EMERGENZA, senza viti a vista. Realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. In caso di interruzione di corrente, la plafoniera passa dalla modalità "Normale" alla modalità "Emergenza" e rimane accesa. Autonomia minima 3 ore. Classe di isolamento II, grado di protezione IP66.



CE

UV

CLASS II

RECYCLABLE

ANTISHOCK

TEMPERATURE

PUBLIC

WALL

RESIDENTIAL

CEILING

INDOOR

OUTDOOR



UMBERTA EMERGENCY - COMPONENTS

IP 66




LED Printed Circuit Board provided with a fully-prewired **Emergency Kit**. In case of blackout the bulkhead automatically switches from Normal mode (15W - 2000 lm) to Emergency mode (2,4W - 250 lm) and keeps on working for the next 3 hours.

Circuito stampato a LED fornito completo di kit d'emergenza pre-cablato. In caso di interruzione di corrente, la plafoniera passa dalla modalità "Normale" (15W - 2000 lm) alla modalità "Emergenza" (2,4W - 250lm) e rimane accesa per 3 ore.



UMBERTA

ø 350



Dimensions and weight

Diameter: ø 350 mm
Depth: 94 mm
Weight: 2,3 Kg

Moulded Colours:

Black Grey White



Diffuser PMMA:

Opal

UMBERTA MAINTAINED EMERGENCY

15W/9W

1B3.000.EM1

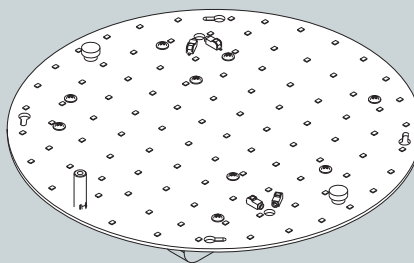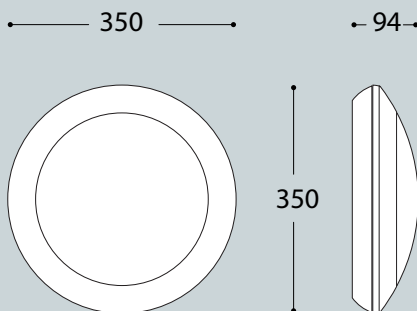

Pcs 12
Kg 25
mc 0,198

PRODUCT TYPE	Wall and Ceiling bulkhead with Emergency kit
OPERATING VOLTAGE	220~240 vAC
LUMINOUS FLUX & POWER	2000 lumen (Normal mode), 15W 250 lumen (Emergency mode), 2.4W
LED TYPE	Edison SMD 2835, 4000 K
CRI	>80Ra
PF (POWER FACTOR)	>0.95
BEAM ANGLE	120°
OPERATING TEMPERATURE	0~50°C
BATTERY	Ni-MH, BK370Ah3.6V, Panasonic (3.5Ah, 3.6V)
BATTERY OPERATING TIME	min 3 hours (250 lumen)
BATTERY CHARGING TIME	24 hours
Drivers Standards	EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 62384, EN 60598-2-22 EN 55015, EN61547, EN 61000-3-2, EN 61000-3-3
Battery Standards	EN 5501-1, EN 61000, EN 55014-2



Emergency details

15W = 150W
incandescent

SAVE 90%



GREEN LED
Identifies the emergency light and shows that the system is operating correctly.



TEST BUTTON
Bulkhead provided with built-in test button to check battery status.



MAINTAINED EMERGENCY
Normal mode: 15W - 2000 lm
Emergency mode: 2.4W - 250 lm