

VIVI 500 HIGH POWER LED

GRAND SIZE



Modern luminaries made in shockproof resin material, UV rays stabilized, rust and corrosion-free. Suitable for post top, wall and hanging installation. Provided with reflective ceiling designed to host the lighting source and equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp included**. Insulation class II, Protection rating IP55.

*Diffusore moderno realizzato in resina antiurto, stabilizzato ai raggi UV, inattaccabile da ruggine e corrosione. Idoneo per il montaggio a palo, a sospensione o a parete. Provvisto di soffitto riflettente progettato per accogliere la sorgente luminosa e fornito **completo di lampada a LED E27 ad ALTA POTENZA**, certificata TÜV-CB di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*

V60.000.W1L

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

**+80°C
-30°**

**90%
HUMIDITY**

**VOLTAGE SURGE
RESISTANT**



**DRIVER
SILICONE
PROTECTION**



MADE IN ITALY



VIVI 500 HIGH POWER LED - COMPONENTS

IP55



ROOF made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

TETTO realizzato in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.

High temperature resistant reflective **CEILING** made of shockproof resin material. Provided with E27 lampholder and equipped with **HIGH POWER LED lamp**. Designed to host and protect the lighting source, granting its safe and quick installation.

SOFFITTO riflettente realizzato in resina antiurto ad alta resistenza al calore. Fornito completo di portalamppada E27 e provvisto di **lampada a LED ad ALTA POTENZA**. Progettato per accogliere e proteggere la sorgente luminosa e per garantirne una veloce e sicura installazione.

DIFFUSER made of UV-rays stabilized polymethylmethacrylate (PMMA), one piece only, available in clear or opal colour.

DIFFUSORE realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV, un pezzo unico, disponibile in colore trasparente o opale.

Decorative connection **RING** to be fixed on the luminaries diffuser.

ANELLO decorativo di connessione da fissare sul diffusore dell'apparecchio.

VIVI 500 HIGH POWER LED

V60.000 *

Ø 60



Dimensions and weight

Height: 600 mm
Diameter: 600 mm
Weight: 7 Kg
Junction to support: Ø 60 mm
Area expose to wind pressure:
CxS = m² 0,1932

Moulded colours:

Black White Grey

Diffuser PMMA:

Clear Opal

HIGH POWER LED



- **COST SAVING:** long-life and efficient LED light source.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** E27 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Luminaries equipped with TÜV-CB certified, long-life and efficient **E27 high power LED lamp**, granting the same luminous flux of traditional SON/HQI lighting sources. The lamp can be quickly and easily replaced, making the luminaries maintenance very simple.

100 - 240 V


LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
E27	50 W	6550 lm	4000 K	.H1L
			3000 K	.H1R
E27	60 W	7600 lm	4000 K	.W1L
			3000 K	.W1R

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

PHOTOMETRIC DATA SAMPLE

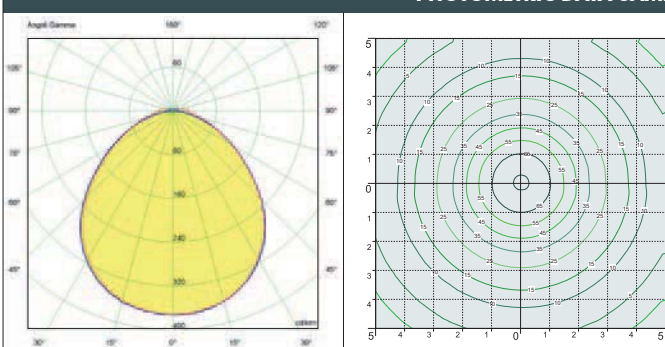

VIVI 500 E27 HIGH POWER LED 60W


POST height 5mt
10x10mt area: average 27 lux








The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

VIVI 500


GRAND SIZE

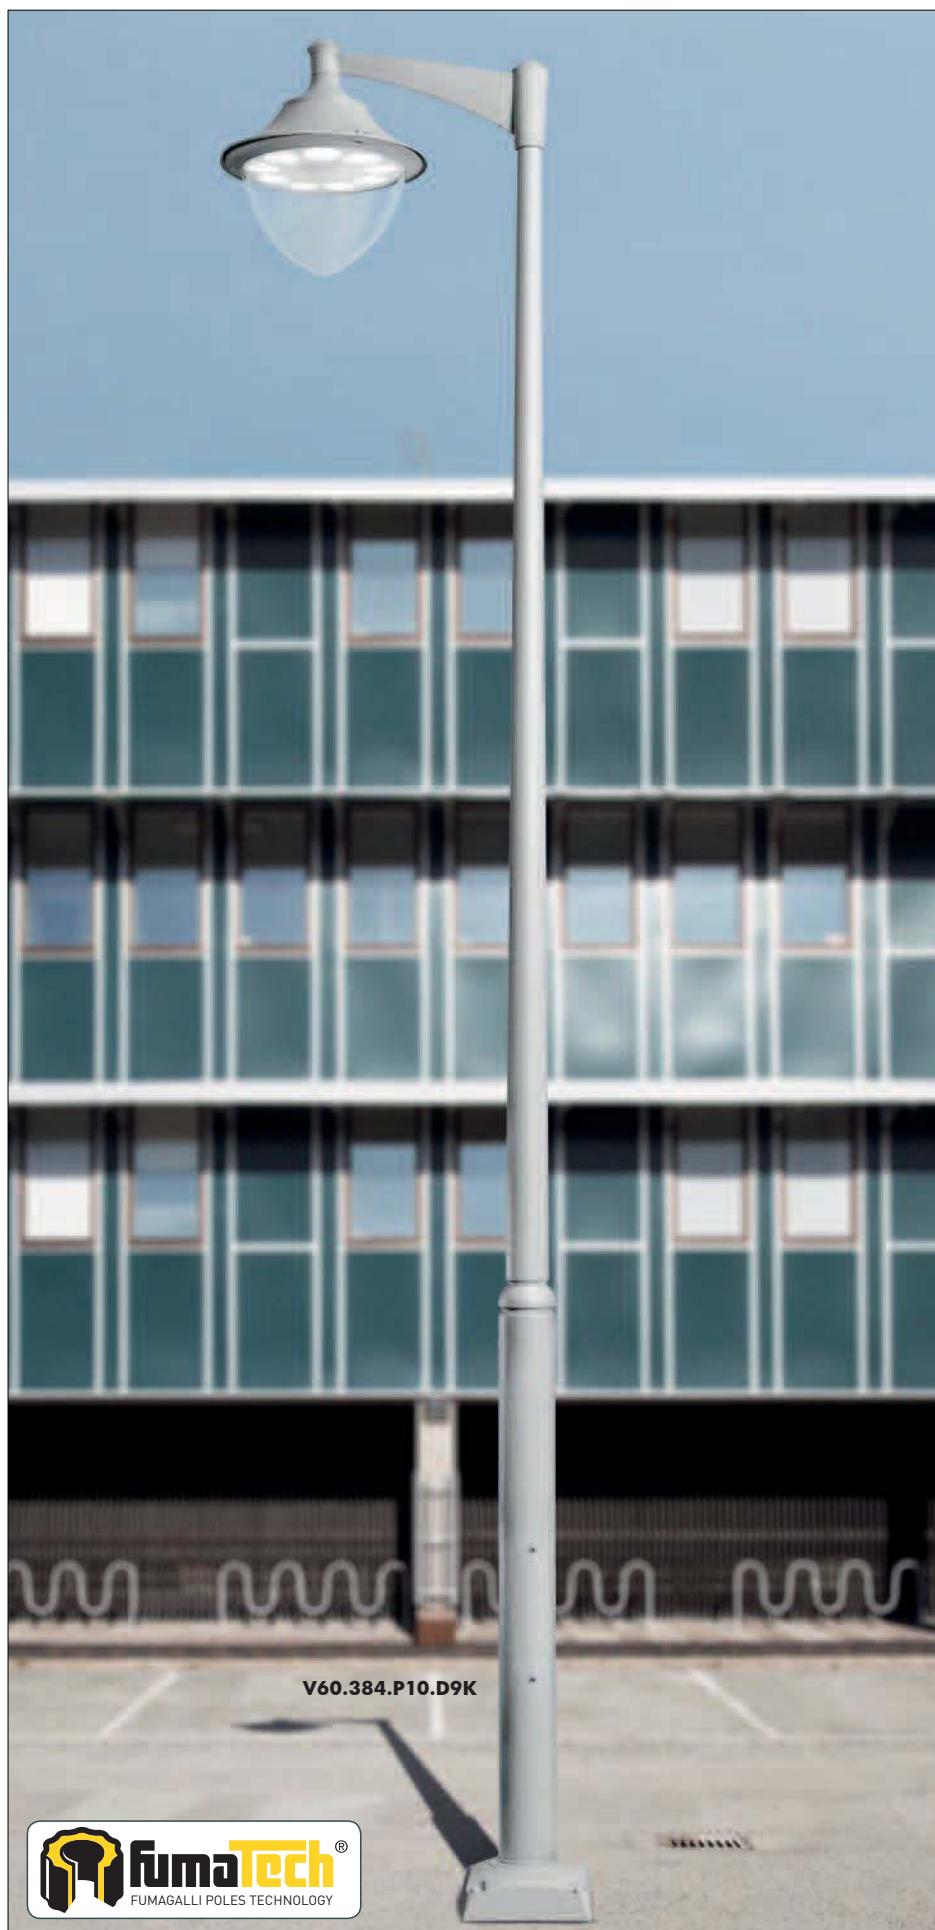


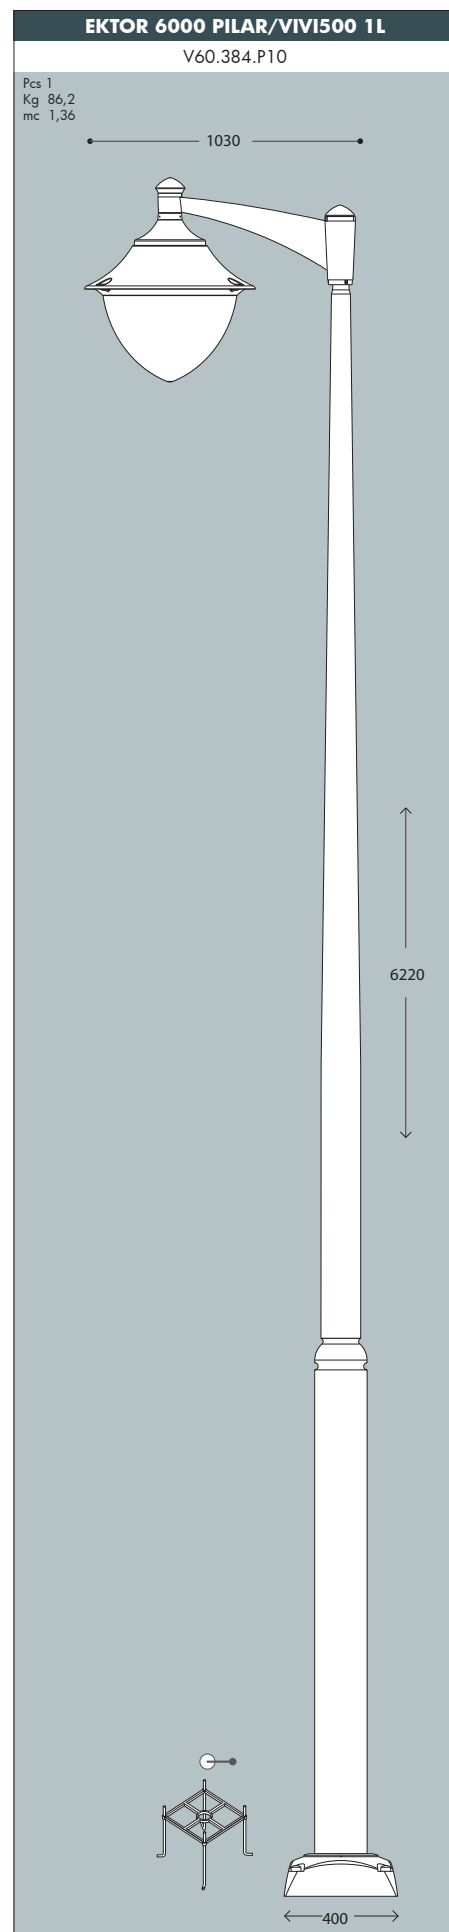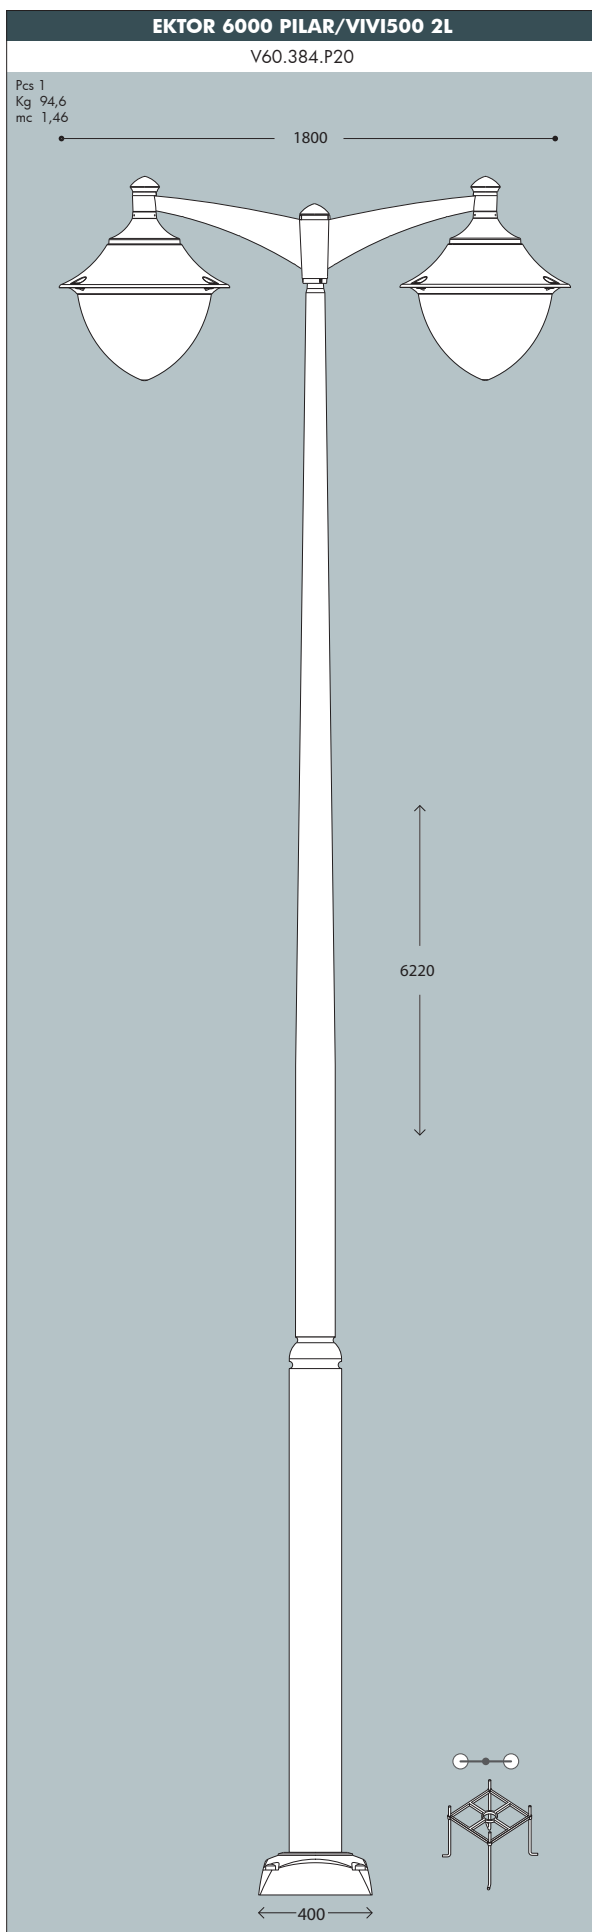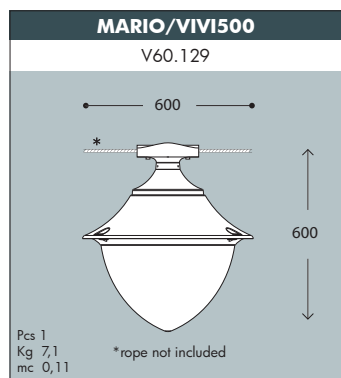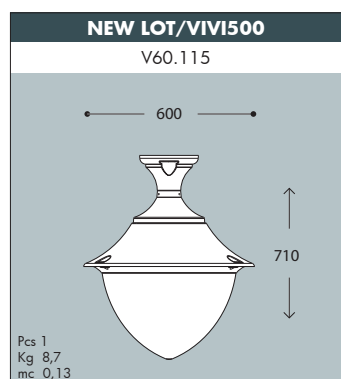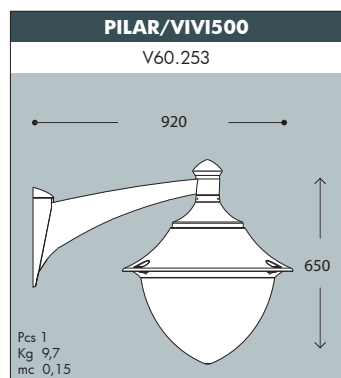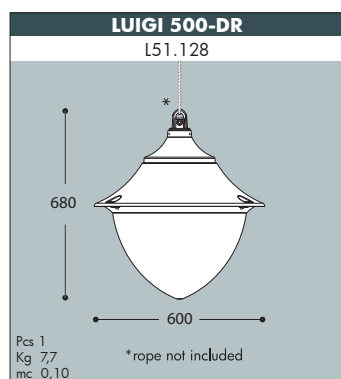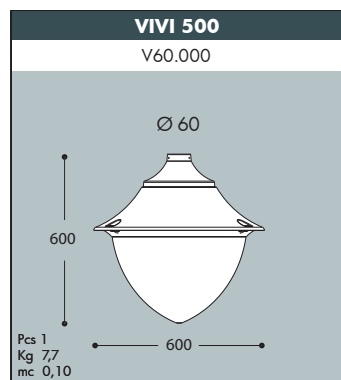

VIVI 500

GRAND SIZE

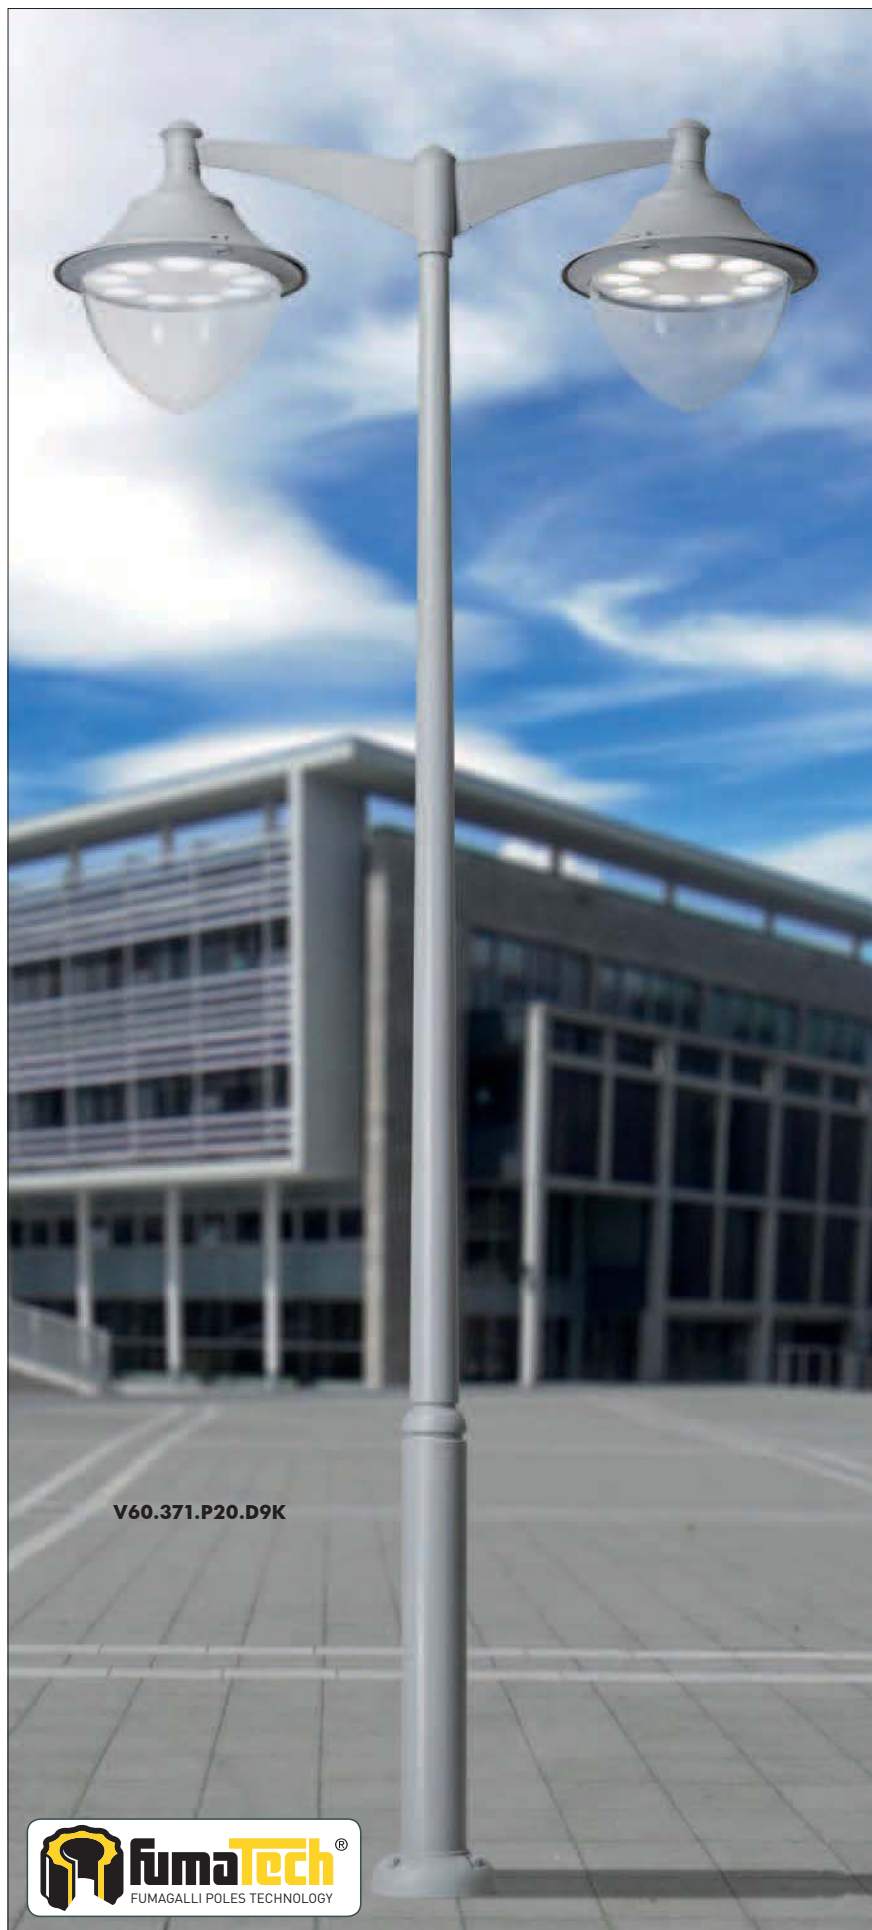

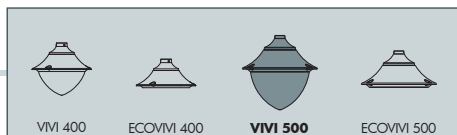

EKTOR 5000 PILAR/VIVI500 1L	AKILLE 5000 PILAR/VIVI500 1L
V60.377.P10	V60.427.P10
Pcs 1 Kg 55,7 mc 0,43	
EKTOR 4500 PILAR/VIVI500 1L	AKILLE 4500 PILAR/VIVI500 1L
V60.374.P10	V60.424.P10
Pcs 1 Kg 50,2 mc 0,40	
EKTOR 4000 PILAR/VIVI500 1L	AKILLE 4000 PILAR/VIVI500 1L
V60.371.P10	V60.421.P10
Pcs 1 Kg 44,7 mc 0,37	

1030

AKILLE5000

EKTOR4000

5220
4520
4220

Ø 265

EKTOR 5000 PILAR/VIVI500 2L	AKILLE 5000 PILAR/VIVI500 2L
V60.377.P20	V60.427.P20
Pcs 1 Kg 65,1 mc 0,60	
EKTOR 4500 PILAR/VIVI500 2L	AKILLE 4500 PILAR/VIVI500 2L
V60.374.P20	V60.424.P20
Pcs 1 Kg 59,6 mc 0,57	
EKTOR 4000 PILAR/VIVI500 2L	AKILLE 4000 PILAR/VIVI500 2L
V60.371.P20	V60.421.P20
Pcs 1 Kg 54,1 mc 0,54	

1800

AKILLE5000

EKTOR4000

5220
4520
4220

Ø 265