

LETI 200

RECESSED LAMP



Recessed wall lamp with rectangular shape, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Available in 5 different cover options to get a diffuse or downwards directed light emission. Insulation class II, Protection rating IP66.


Lampada ad incasso a muro con forma rettangolare, realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Fornita con inclusa lampadina a LED GX53 con Kelvin impostabile certificata TÜV-CB, di lunga durata ed elevata efficienza. Disponibile in 5 differenti versioni di cover per permettere un'emissione della luce diffusa o diretta verso il basso. Classe di isolamento II, grado di protezione IP66.



LETI 200
4C1.000



LETI 200-GL
4C2.000



LETI 200-RS
4C3.000



LETI 200-HS
4C4.000



LETI 200-VP
4C5.000



4C4.000.G1K

CCT SETTABLE



SDCM <6

3000 K

4000 K

6500 K



MADE IN
ITALY

LETI 200 - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized, rust and corrosion free. Different shapes available allowing a diffuse or a downwards light emission.

***COVER** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Disponibile in diverse versioni per permettere un'emissione della luce diffusa o diretta verso il basso.*

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA).

***DIFFUSORE** opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV.*

High quality silicone rubber **GASKET** to ensure high protection against external agents.

***GUARNIZIONE** in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.*

HOUSING made of shockproof resin material, UV rays stabilized, suitable for the electrical devices fixation. Provided complete with **GX53** led lamp.

***CASSA** realizzata in resina antiurto, stabilizzata ai raggi UV, adatta ad alloggiare gli accessori elettrici. Fornita completa di lampadina led **GX53**.*

INSTALLATION HOUSING made of resin material to be cemented into the wall before installing the luminaries. Provided with double cable entry with silicone cable gland.

***CONTRO-CASSA** in resina da cementare nel muro prima dell'installazione degli apparecchi. Completa di doppia entrata per il cavo elettrico e passacavo in gomma.*

LETI 200



Dimensions and weight

Height: 113 mm
Width: 188 mm
Installation housing depth: 98 mm
Weight: 0,6 Kg

Moulded colours:

☒ Black ☐ White ☐ Grey

Diffuser PMMA:

☐ Opal

LED LAMPS



Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

GX53 LED


100 - 240 V




Recessed lamp supplied as standard with TÜV-CB certified, long-life, efficient and **Kelvin settable GX53 LED lamp included**. Quick and easy lamp replacement for a very simple maintenance after installation.

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL) UP TO	COLOUR TEMP.	*ADD. SUFFIX
	3 W	410 lm	6500 K	.G1K
			4000 K	
			3000 K	

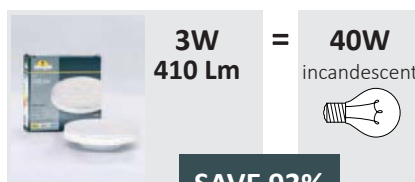

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambiance.

LETI 200

RECESSED LAMP



LETI 200 4C1.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

LETI 200-GL 4C2.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

LETI 200-RS 4C3.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

LETI 200-HS 4C4.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12

LETI 200-VP 4C5.000.G1K

3W

CCT SETTABLE GX53 LED LAMP INCLUDED
3000K/4000K/6500K

Pcs 36
Kg 22,7
mc 0,12