

# SERGIO GX53 LED - FLAT DIFFUSER

LARGE SIZE

E27 square lantern in modern revival style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as standard with **FLAT diffuser** and equipped with TÜV-CB certified long-life, powerful, efficient and **Kelvin settable GX53 LED modular system**. Designed according to the international regulations against light pollution (standard UNI 10819). Insulation class II, Protection rating IP 55.

*Lanterna quadra E27 in stile revival moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita con **diffusore piatto** ed equipaggiata con **sistema modulare a LED GX53 con Kelvin impostabile** certificato TÜV-CB di lunga durata ed alta efficienza. Progettato in ottemperanza alle norme internazionali contro l'inquinamento luminoso (standard UNI 10819). Classe di isolamento II, grado di protezione IP55.*

T35.000.D4K

## CCT SETTABLE



SDCM <6

3000 K

4000 K

6500 K



**SERGIO GX53 LED - LANTERN COMPONENTS**

IP55



Decorative **PINNACLE** to be mounted on the roof top for post installation or on the lantern base for hanging installation.

***PINNACOLO** decorativo applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV-ray stabilized.

***TETTO** realizzato in resina antiurto, stabilizzato ai raggi UV.*

**DIFFUSER** with flat shape made of UV-rays stabilized polymethylmethacrylate (PMMA), provided with silicone rubber gasket to ensure an increased protection against external agent.

***DIFFUSORE** in polimetilmetacrilato (PMMA) con configurazione piatta, provvisto di guarnizione in gomma siliconica per garantire una migliore protezione contro gli agenti esterni.*

**CAGE** made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***GABBIA** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

**SERGIO GX53 LED**

T35.000 \*



330



460

Ø 60

**Dimensions and weight**

Height: 460 mm  
Width: 330 mm  
Depth: 330 mm  
Weight: 4,2 Kg  
Junction to support: diameter 60 mm  
Area exposed to wind pressure:  
CxS = m<sup>2</sup> 0,089

**Moulded colours:**

Black White  
Grey

**Diffuser PMMA:**

Clear Opal

**LED LAMPS**



Comply with: EU2019/2015  
EU2019/2020  
Technical details on page 668.

**CCT SETTABLE LED LAMP**



CCT switch settable in three different positions, to select the desired Kelvin temperature (3000K/4000K/6500K) and get a customized ambience.

**GX53 LED**





- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** GX53 standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** built-in driver fully protected against heat and humidity by silicone paste.

Lantern supplied with white resin CEILING provided with 4x TÜV-CB certified, long-life, efficient and Kelvin settable GX53 LED lamps included. Each lamp can be quickly and easily replaced individually, making the luminaries maintenance very simple.

| 100 - 240 V |                        |                               |              |              |
|-------------|------------------------|-------------------------------|--------------|--------------|
| LAMP        | POWER                  | LUMINOUS FLUX (Φ TOTAL) UP TO | COLOUR TEMP. | *ADD. SUFFIX |
|             | 4x 10 W<br><b>40 W</b> | <b>5160 lm</b>                | 6500 K       | .D4K         |
|             |                        |                               | 4000 K       |              |
|             |                        |                               | 3000 K       |              |

**PHOTOMETRIC DATA SAMPLE**



**SERGIO GX53 LED**  
4X10W

POST height 4mt  
10x10mt area: average 22 lux

The photometric data for all the versions are available upon request or on our website.

\* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

SERGIO  
LARGE SIZE





ROBY



DARIO



SERGIO

| IOLE/SERGIO                 |         |
|-----------------------------|---------|
|                             | T33.243 |
| <b>GX53</b>                 | T35.243 |
| Pcs 1<br>Kg 5,2<br>mc 0,061 |         |
|                             |         |

| MIDIPILAR/SERGIO           |         |
|----------------------------|---------|
|                            | T33.254 |
| <b>GX53</b>                | T35.254 |
| Pcs 1<br>Kg 5,5<br>mc 0,83 |         |
|                            |         |

| SICAR/SERGIO              |         |
|---------------------------|---------|
|                           | T33.126 |
| <b>GX53</b>               | T35.126 |
| Pcs 1<br>Kg 5<br>mc 0,061 |         |
|                           |         |

| SERGIO                      |         |
|-----------------------------|---------|
|                             | T33.000 |
| <b>GX53</b>                 | T35.000 |
| Pcs 1<br>Kg 4,2<br>mc 0,061 |         |
|                             |         |

| EMILIO/SERGIO                |         |
|------------------------------|---------|
|                              | T33.307 |
| <b>GX53</b>                  | T35.307 |
| Pcs 2<br>Kg 28,2<br>mc 0,334 |         |
|                              |         |

| DINO/SERGIO                  |         |
|------------------------------|---------|
|                              | T33.306 |
| <b>GX53</b>                  | T35.306 |
| Pcs 2<br>Kg 26,7<br>mc 0,304 |         |
|                              |         |

| DANILO/SERGIO                |         |
|------------------------------|---------|
|                              | T33.305 |
| <b>GX53</b>                  | T35.305 |
| Pcs 2<br>Kg 23,7<br>mc 0,273 |         |
|                              |         |

| MAXIDISMA/SERGIO            |         |
|-----------------------------|---------|
|                             | T33.117 |
| <b>GX53</b>                 | T35.117 |
| Pcs 1<br>Kg 4,5<br>mc 0,061 |         |
|                             |         |

# SERGIO

LARGE SIZE





ROBY



DARIO



SERGIO

## VANNI 2500/SERGIO


LARGE SIZE

### VANNI 2500 IOLE/SERGIO 2L

T33.310.E20

**GX53** T35.310.E20

Pcs 1  
Kg 30,8  
mc 0,268




### VANNI 2500 IOLE/SERGIO 3L

T33.310.E30

**GX53** T35.310.E30

Pcs 1  
Kg 35  
mc 0,342




### VANNI 2500/SERGIO

T33.310

**GX53** T35.310

Pcs 1  
Kg 25,2  
mc 0,196

330



Ø 265


### VANNI 2500 IOLE/SERGIO 1L

T33.310.E10

**GX53** T35.310.E10

Pcs 1  
Kg 25,6  
mc 0,233

540

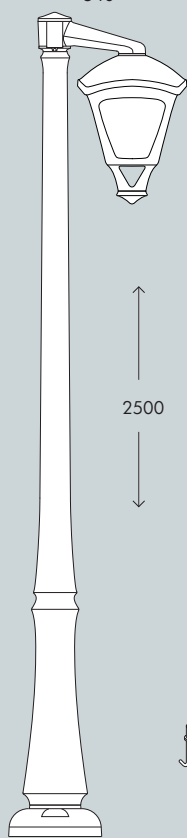

Ø 265


### VANNI 2500 IOLE/SERGIO 2L

T33.310.E20

**GX53** T35.310.E20

Pcs 1  
Kg 30,8  
mc 0,268

800

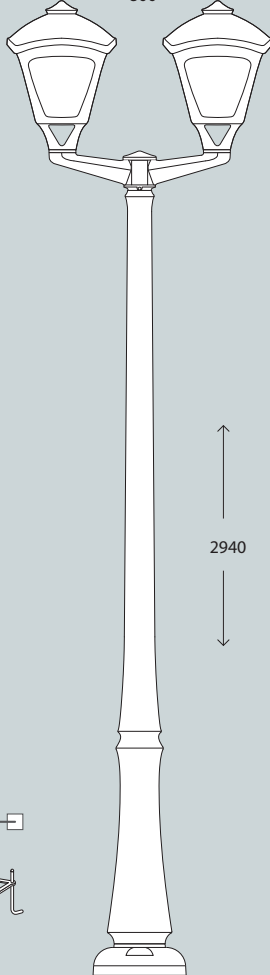

Ø 265


### VANNI 2500 IOLE/SERGIO 3L

T33.310.E30

**GX53** T35.310.E30

Pcs 1  
Kg 35  
mc 0,342

730

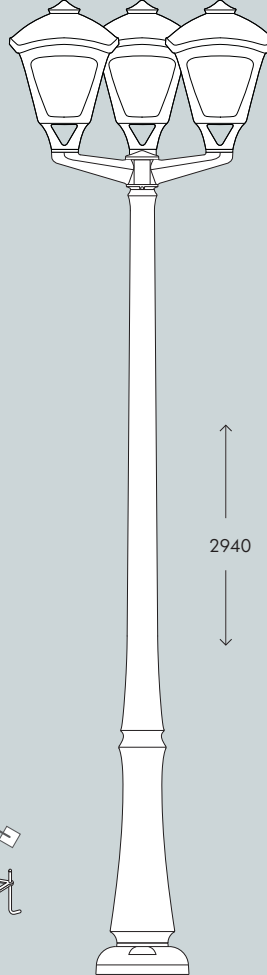

Ø 265

GARDEN REVIVAL  
GARDEN CLASSIC  
BOLLARD  
UP&DOWN  
DOWNLIGHT  
IN-GROUND  
BRICKLIGHT  
FLOODLIGHT  
BULKHEAD  
SOLAR  
URBAN CLASSIC  
URBAN REVIVAL  
URBAN MODERN  
POST  
LAMPS

# SERGIO

LARGE SIZE



MADE IN ITALY



ROBY



DARIO



SERGIO

## EKTOR 3000/SERGIO


LARGE SIZE

### EKTOR 3000 IOLE/SERGIO 2L

T33.364.E20

**GX53** T35.364.E20

Pcs 1  
Kg 40,7  
mc 0,315




### EKTOR 3000 IOLE/SERGIO 3L

T33.364.E30

**GX53** T35.364.E30

Pcs 1  
Kg 45,3  
mc 0,369




### EKTOR 3000/SERGIO

T33.364

**GX53** T35.364

Pcs 1  
Kg 35,7  
mc 0,223

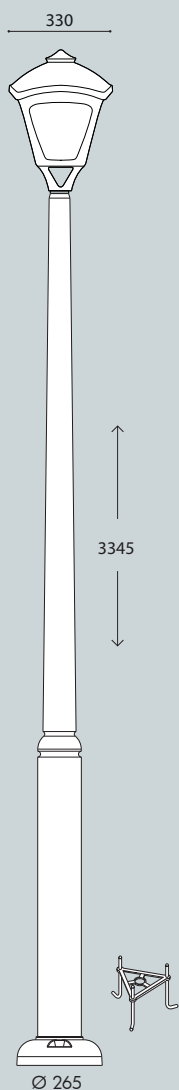


### EKTOR 3000 IOLE/SERGIO 1L

T33.364.E10

**GX53** T35.364.E10

Pcs 1  
Kg 36,1  
mc 0,282

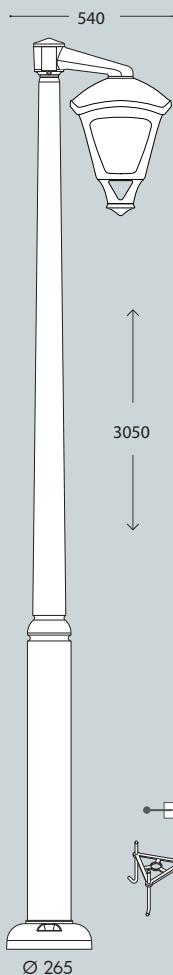


### EKTOR 3000 IOLE/SERGIO 2L

T33.364.E20

**GX53** T35.364.E20

Pcs 1  
Kg 40,7  
mc 0,315

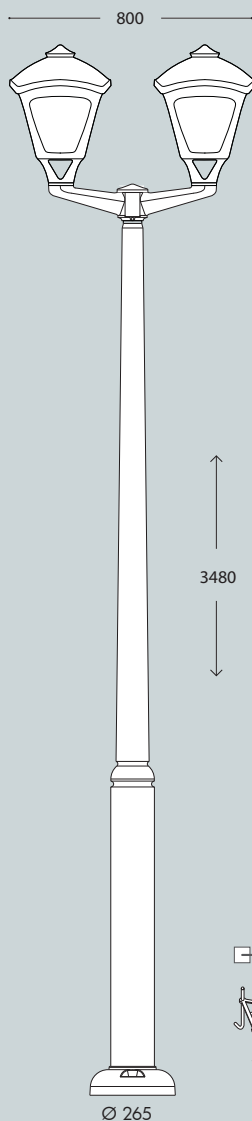


### EKTOR 3000 IOLE/SERGIO 3L

T33.364.E30

**GX53** T35.364.E30

Pcs 1  
Kg 45,3  
mc 0,369

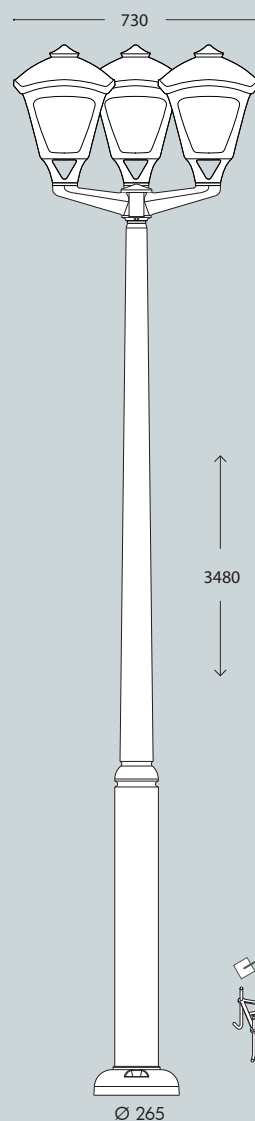

# SERGIO

LARGE SIZE



MADE IN ITALY



ROBY



DARIO



SERGIO

| EKTOR 3500/SERGIO              |  | EKTOR 4000 MIDIPILAR/SERGIO 1L |  | EKTOR 4000 MIDIPILAR/SERGIO 2L |  | EKTOR 4000 MIDIPILAR/SERGIO 3L |  |
|--------------------------------|--|--------------------------------|--|--------------------------------|--|--------------------------------|--|
| T33.367                        |  | T33.371.A10                    |  | T33.371.A20                    |  | T33.371.A30                    |  |
| <b>GX53</b> T35.367            |  | <b>GX53</b> T35.371.A10        |  | <b>GX53</b> T35.371.A20        |  | <b>GX53</b> T35.371.A30        |  |
| Pcs 1<br>Kg 39,3<br>mc 0,249   |  | Pcs 1<br>Kg 45,1<br>mc 0,306   |  | Pcs 1<br>Kg 50,3<br>mc 0,49    |  | Pcs 1<br>Kg 50,3<br>mc 0,490   |  |
| EKTOR 3500 MIDIPILAR/SERGIO 1L |  | EKTOR 3500 MIDIPILAR/SERGIO 2L |  | EKTOR 3500 MIDIPILAR/SERGIO 3L |  | EKTOR 3500 MIDIPILAR/SERGIO 3L |  |
| T33.367                        |  | T33.367.A10                    |  | T33.367.A20                    |  | T33.367.A30                    |  |
| <b>GX53</b> T35.367            |  | <b>GX53</b> T35.367.A10        |  | <b>GX53</b> T35.367.A20        |  | <b>GX53</b> T35.367.A30        |  |
| Pcs 1<br>Kg 39,3<br>mc 0,249   |  | Pcs 1<br>Kg 40,3<br>mc 0,281   |  | Pcs 1<br>Kg 43<br>mc 0,342     |  | Pcs 1<br>Kg 55,5<br>mc 0,568   |  |
|                                |  |                                |  |                                |  |                                |  |