

GIAMPY

SMALL SIZE

E27 hexagonal lantern in modern revival style, made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Modular construction suitable for post top, hanging and wall installation. Supplied as optional with TÜV-CB certified, long-life and efficient **LED lamps** suitable for outdoor use. Insulation class II, protection rating IP55.

*Lanterna esagonale E27 in stile revival moderno, realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a palo, a sospensione o a parete. Fornita anche completa di **lampadine LED** adatte ad uso in ambiente esterno, certificate TÜV-CB, di lunga durata ed elevata efficienza. Classe di isolamento II, grado di protezione IP55.*



6,5W 800 lm	8,5W 920 lm	11W 1200 lm
2700 K	2700 K	4000 K 6500 K

CCT SET


TÜV CB

+80°C
-30°

90% HUMIDITY

VOLTAGE SURGE
RESISTANT

INDOOR & OUTDOOR USE

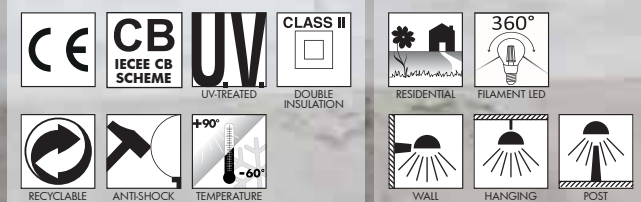

H21.114.V1K

MADE IN ITALY

GIAMPY - LANTERN COMPONENTS

IP55



Decorative **PINNACLE** provided with silicone rubber gasket to be mounted on the roof top for post installation or on the lantern base for hanging installation.

***PINNACOLO** decorativo completo di guarnizione in gomma siliconica applicabile alla sommità del tetto (montaggio a palo) o sulla base della gabbia (montaggio a sospensione).*

Lantern **ROOF** made of shockproof resin material, UV rays stabilized and supplied with E27 lampholder. Easy opening for relamping and maintenance.

***TETTO** realizzato in resina antiurto, stabilizzata ai raggi UV, fornito completo di portalampada E27. Facilmente rimovibile per manutenzione e cambio lampadina.*

DIFFUSER made of UV stabilized polymethylmethacrylate (PMMA) resistant to yellowing process due to sun rays, available in clear or opal color and provided with recess for power cable supply. Made of one piece only and closed at the bottom to ensure high protection against external agents (IP 55).

***DIFFUSORE** in polimetilmetacrilato (PMMA) resistente al processo di ingiallimento dovuto ai raggi solari, disponibile in colore trasparente od opale e provvisto di scanalatura per il passaggio del cavo di alimentazione. Realizzato in un pezzo unico e con fondo chiuso per garantire un alto livello di protezione contro gli agenti esterni (IP 55).*

CAGE made of shockproof resin material, UV-rays stabilized, rust and corrosion-free.

***GABBIA** realizzata in resina antiurto, stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione.*

GIAMPY

H21.000 *



210

260

Ø 60

Dimensions and weight

Height: 260 mm

Width: 210 mm

Depth: 200 mm

Weight: 0,85 Kg

Moulded colours:

Black White

Grey

Diffuser PMMA:

Clear Opal

E27 FILAMENT



- perfect **MATCHING WITH DECORATIVE LANTERNS.**
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **360°OMNIDIRECTIONAL LIGHT.**
- **HIGH EFFICIENCY:** 90% ENERGY SAVING.

E27 CCT SET



- **A60 CCT SETTABLE:** 2700K/4000K/6500K.
- **SUITABLE FOR OUTDOOR USE:** 100-240V driver.
- **EYE COMFORT** opal glass.
- **HIGH EFFICIENCY:** >85% ENERGY SAVING.

100 - 240 V

*ADD. SUFFIX


suitable lamps: CFL-LED max 150 mm		E27 lampholder only		.E27
LAMP	POWER	LUMINOUS FLUX UP TO	COLOUR TEMP.	
FILAMENT LED E27	6,5W	800 lm	2700 K	.F1R
CCT SET LED E27	8,5 W	920 lm	6500 K 4000 K 2700 K	.V1K
6,5W filament 8,5W CCT SAVE up to 89%		60W incandescent		

LED LAMPS





Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

CCT SETTABLE LED LAMP



CCT switch settable in three different positions, to select the desired Kelvin temperature (2700K/4000K/6500K) and get a customized ambiance.

PHOTOMETRIC DATA SAMPLE



GIAMPY lantern clear with Fumagalli Filament Led Lamp 6,5W.


POST height 1mt
6x6mt area: average 6 lux

The photometric data for all the versions are available upon request or on our website.

* ADD THESE SUFFIXES TO THE REFERENCES MENTIONED IN THE CATALOGUE

GIAMPY


SMALL SIZE

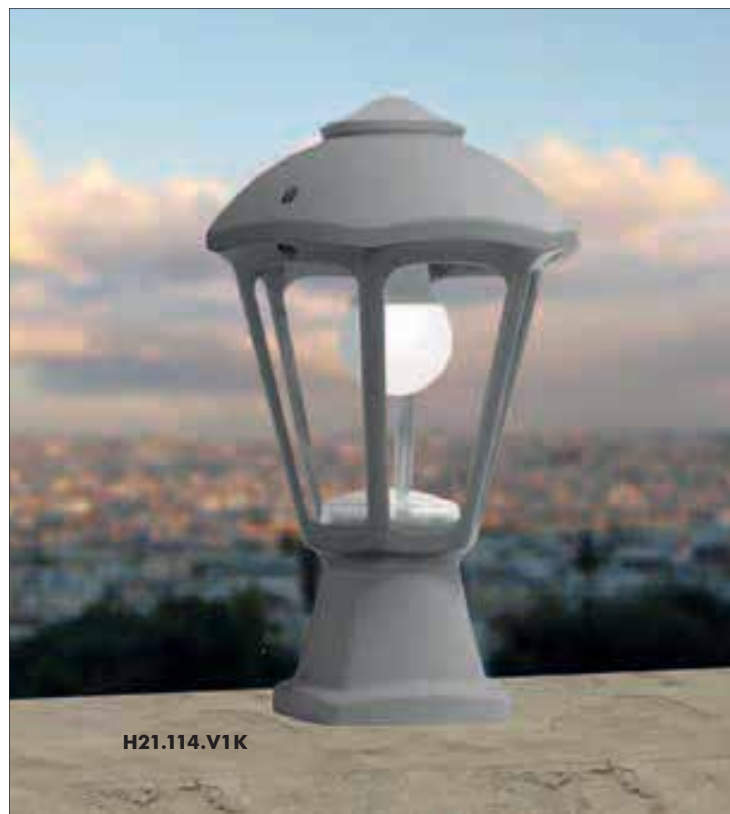

NARDO/GIAMPY

E27 lampholder	H21.240.E27
6,5W filament	H21.240.F1R
8,5W CCT set	H21.240.V1K


Pcs 18
Kg 18,3
mc 0,207



SICAR/GIAMPY


E27 lampholder	H21.125.E27
6,5W filament	H21.125.F1R
8,5W CCT set	H21.125.V1K

Pcs 18
Kg 21,1
mc 0,207



GIAMPY
H21.000


Pcs 1
Kg 0,8
mc 0,011



DISMA/GIAMPY

E27 lampholder	H21.114.E27
6,5W filament	H21.114.F1R
8,5W CCT set	H21.114.V1K


Pcs 18
Kg 17,5
mc 0,207



GIAFFA/GIAMPY resin

E27 lampholder	H21.242.E27
6,5W filament	H21.242.F1R
8,5W CCT set	H21.242.V1K

Pcs 1
Kg 1,9
mc 0,048

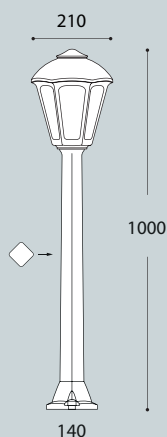

GIAMPY
SMALL SIZE



DANILO/GIAMPY	
E27 lampholder	H21.305.E27
6,5W filament	H21.305.F1R
8,5W CCT set	H21.305.V1K

Pcs 1
Kg 8,9
mc 0,125

210

1710

Ø 245

DANILO NARDO/GIAMPY 2L	
E27 lampholder	H21.305.D20.E27
6,5W filament	H21.305.D20.F1R
8,5W CCT set	H21.305.D20.V1K

Pcs 1
Kg 9,8
mc 0,176

600

1720

2

Ø 245

DANILO NARDO/GIAMPY 3L	
E27 lampholder	H21.305.D30.E27
6,5W filament	H21.305.D30.F1R
8,5W CCT set	H21.305.D30.V1K

Pcs 1
Kg 10,8
mc 0,176

560

1720

3

Ø 245

DINO NARDO/GIAMPY 2L	
E27 lampholder	H21.306.D20.E27
6,5W filament	H21.306.D20.F1R
8,5W CCT set	H21.306.D20.V1K

Pcs 1
Kg 11,5
mc 0,186

600

1970

2

Ø 245

DINO NARDO/GIAMPY 3L	
E27 lampholder	H21.306.D30.E27
6,5W filament	H21.306.D30.F1R
8,5W CCT set	H21.306.D30.V1K

Pcs 1
Kg 12,2
mc 0,186

560

1970

3

Ø 245