fumagalli®
since 1973

MADE IN ITALY

TOP SELECTION PROJECT 2026

CLASSIC RANGE



REVIVAL RANGE



MODERN RANGE



E27 HIGH POWER LED
REVIVAL & CLASSIC RANGE

REVIVAL RANGE



LUCA
for details see pag. 10




SERGIO
for details see pag. 12


CLASSIC RANGE



NOEMI
for details see pag. 26

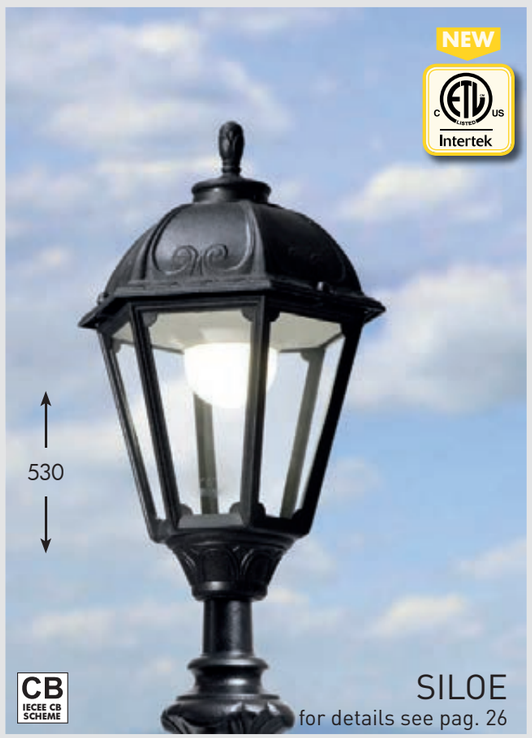

SILOE
for details see pag. 26

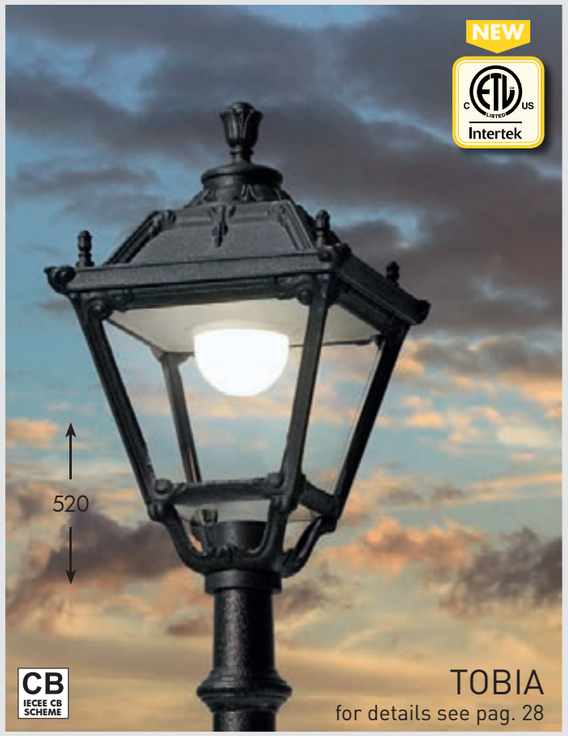

TOBIA
for details see pag. 28



SIMON
for details see pag. 28



ELIA
for details see pag. 32



PIETRO
for details see pag. 32

MODERN RANGE

















E27 HIGH POWER LED






TÜV 500 CE CB

LVD EMC ERP

IECEE CB SCHEME

for details see pag. 73

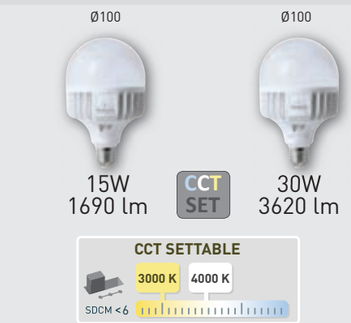



NEW

VANNI 2500/SERGIO
for details see pag. 12



SERGIO

PAG 12



VANNI 2500/LUCA
for details see pag. 10



LUCA

PAG 10



NEW



VANNI2500
IOLE/LUCA2L
for details see pag. 10

MADE IN ITALY



EKTOR 3000
MIDIPILAR/SERGIO1L
for details see pag. 12

ANTI RUST
LIFETIME GUARANTEE
NO PAINTING REQUIRED
MADE IN ITALY

fumagalli®
since 1973

REVIVAL RANGE

HIGH POWER CCT LED INCLUDED

IOLE/LUCA
for details see pag. 10



NEW

CLASSIC RANGE



MAXIDISMA/LUCA
for details see pag. 10

MODERN RANGE

HIGH POWER CCT LED INCLUDED

MIDIPILAR/SERGIO
for details see pag. 12



MADE IN ITALY

ADVANTAGES

fumaTech®
FUMAGALLI POLES TECHNOLOGY



ANTI CORROSION



NO MAINTENANCE



UV-RAYS STABILIZED



DOUBLE INSULATION



NOT AFFECTED BY CHEMICAL FERTILIZES



FULLY MODULAR Ø60mm

RESIN POST OF A SINGLE PIECE WITHOUT JOINTS

Stronger, safer and more durable

INNER METAL POLE STRUCTURE
Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.

EXPANSE
High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.

OUTER RESIN COVER
Outer coating of a single piece without joints made of shockproof resin material:
- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire



SUGGESTED COMBINATIONS


SINGLE LIGHTS





NEW

DIFFUSER

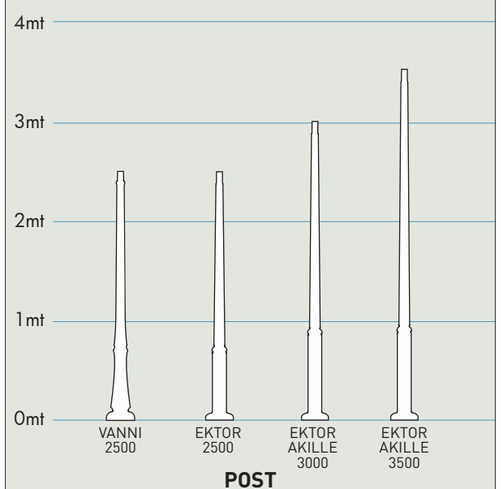

POST


MULTI-HEAD LIGHTS






NEW

DIFFUSER

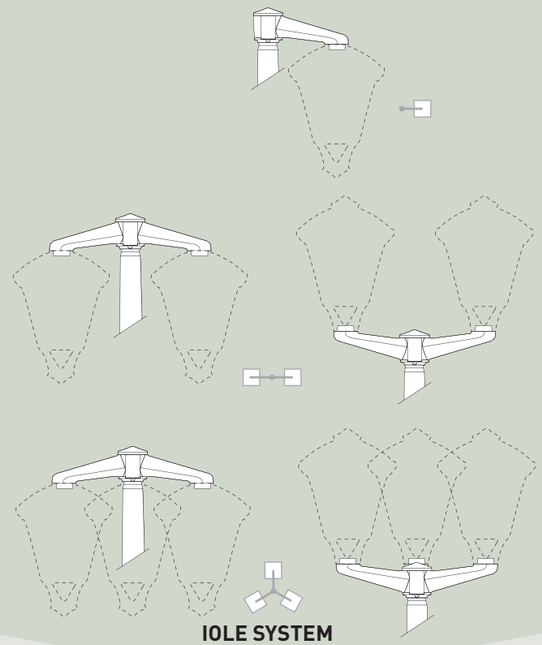

IOLE SYSTEM 1L -2L-3L

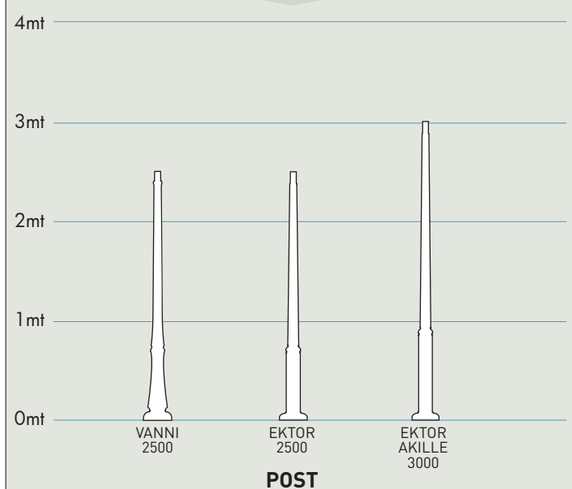

POST


MULTI-HEAD LIGHTS






NEW

DIFFUSER

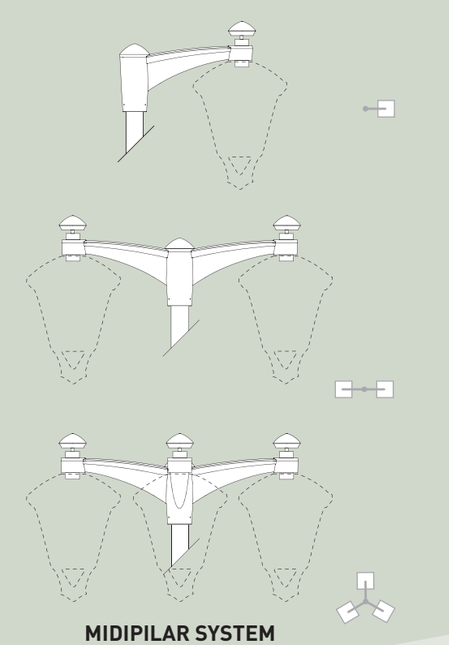

MIDIPILAR SYSTEM 1L -2L-3L

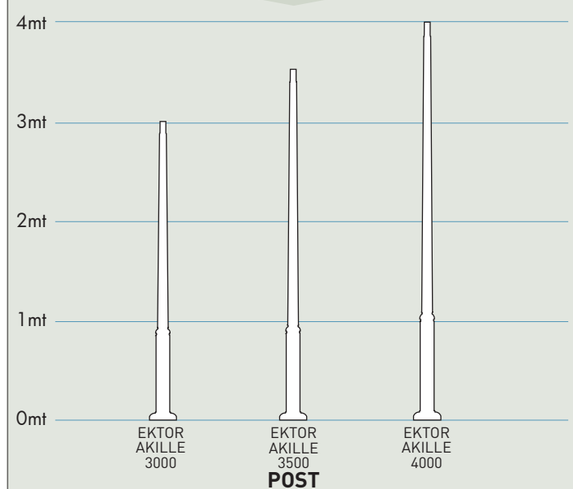

POST

LUCA HIGH POWER LED

fumagalli since 1973

MADE IN ITALY

NEW

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30°



90% HUMIDITY

VOLTAGE SURGE RESISTANT

30W (3620 lm)
50W (6550 lm)

More details at page 73

E27 HIGH POWER LED VERSIONS

30W HIGH POWER LED	50W HIGH POWER LED
	


AVAILABLE COLORS


RESIN BODY (MOULDED COLOURS)			DIFFUSER	
				
BLACK **(A)**	GREY **(L)**	WHITE **(W)**	CLEAR **(X)**	OPAL **(Y)**

NEW

C ETL US LISTED Intertek

UV-TREATED · ANTI-SHOCK · RECYCLABLE · CE · CB IECEE CB SCHEME · IP55 · CLASS II DOUBLE INSULATION


LUCA 30W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	CCT SETTABLE	
E27 HIGH POWER LED  Ø 100	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K CCT SET	LUCA = 70W HQI-SON

LUCA 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	LUCA = 100W HQI-SON

LUCA HIGH POWER LED



30W LED	CCT SET	H35.000.Q1K
50W LED	4000K	H35.000.H1L
	3000K	H35.000.H1R



SERGIO HIGH POWER LED

fumagalli since 1973

MADE IN ITALY

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30°



90% HUMIDITY

VOLTAGE SURGE RESISTANT

30W (3620 lm)
50W (6550 lm)

More details at page 73

E27 HIGH POWER LED VERSIONS

30W HIGH POWER LED	50W HIGH POWER LED
	


AVAILABLE COLORS


RESIN BODY (MOULDED COLOURS)			DIFFUSER	
				
BLACK **(A)**	GREY **(L)**	WHITE **(W)**	CLEAR **(X)**	OPAL **(Y)**

NEW

ETL C US LISTED Intertek

UV-TREATED · ANTI-SHOCK · RECYCLABLE · CE · CB IECEE CB SCHEME · IP55 · CLASS II DOUBLE INSULATION


SERGIO 30W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	CCT SETTABLE	
E27 HIGH POWER LED  Ø 100	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K CCT SET	SERGIO = 70W HQI-SON

SERGIO 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	SERGIO = 100W HQI-SON

SERGIO HIGH POWER LED



30W LED	CCT SET	T33.000.Q1K
50W LED	4000K	T33.000.H1L
	3000K	T33.000.H1R



SERGIO GX53 LED

fumagalli since 1973

MADE IN ITALY

GX53 LED VERSION

4x GX53



CCT SETTABLE

3000 K | 4000 K | 6500 K

SDCM <6

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)			DIFFUSER	
BLACK **(A)**	GREY **(L)**	WHITE **(W)**	CLEAR **(X)**	OPAL **(Y)**

FLAT DIFFUSER

UV-TREATED · ANTI-SHOCK · RECYCLABLE · CE · IP55 · CLASS II DOUBLE INSULATION · ZONE 1


SERGIO 40W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
GX53 LED	4x10W **40W**	**5160 lm**	**100-240V** 50/60 Hz	6500K/4000K/3000K CCT SET	SERGIO = **100W** HQI-SON

SERGIO GX53 LED-FLAT DIFFUSER



CCT SET LED GX53 LAMP INCLUDED | 4x10W **40W** | T35.000.D4K

FLAT DIFFUSER FOR GX53 LED VERSION



POLES





FumaTech®
FUMAGALLI POLES TECHNOLOGY

EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION

VANNI 2500


without door	000.310

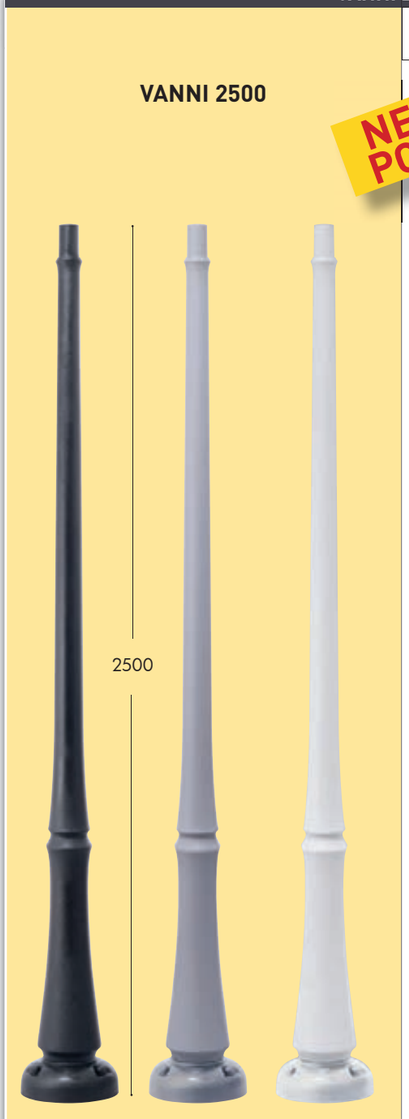

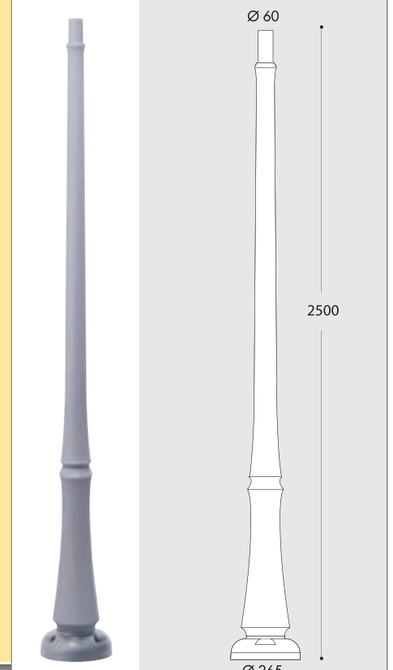

EKTOR 2500

without door	000.361
with door	000.362
with door & box	000.363

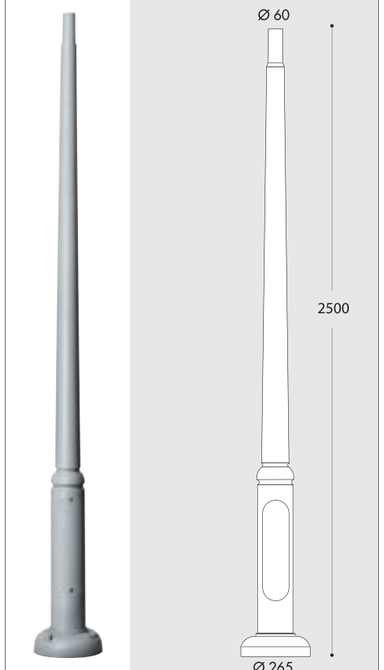


AVAILABLE COLORS


MOULDED COLOURS




EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION

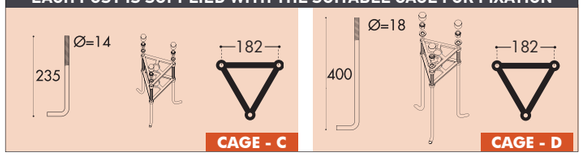


	EKTOR 3000	AKILLE 3000
without door	000.364	000.414
with door	000.365	000.415
with door & box	000.366	000.416

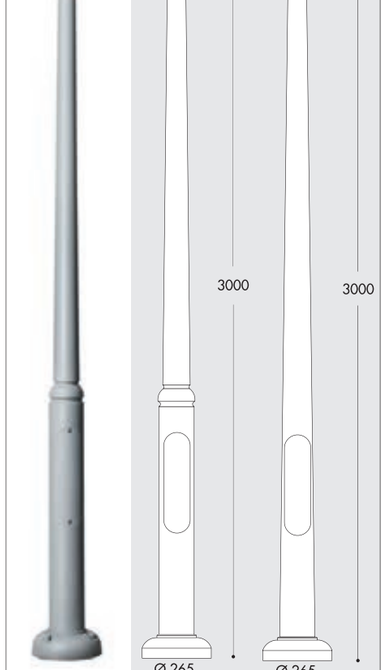

	EKTOR 3500	AKILLE 3500
without door	000.367	000.417
with door	000.368	000.418
with door & box	000.369	000.419

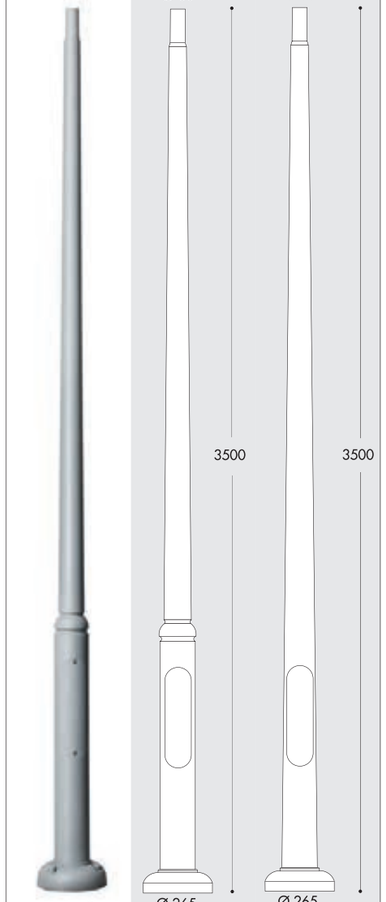


	EKTOR 4000	AKILLE 4000
without door	000.371	000.421
with door	000.372	000.422
with door & box	000.373	000.423

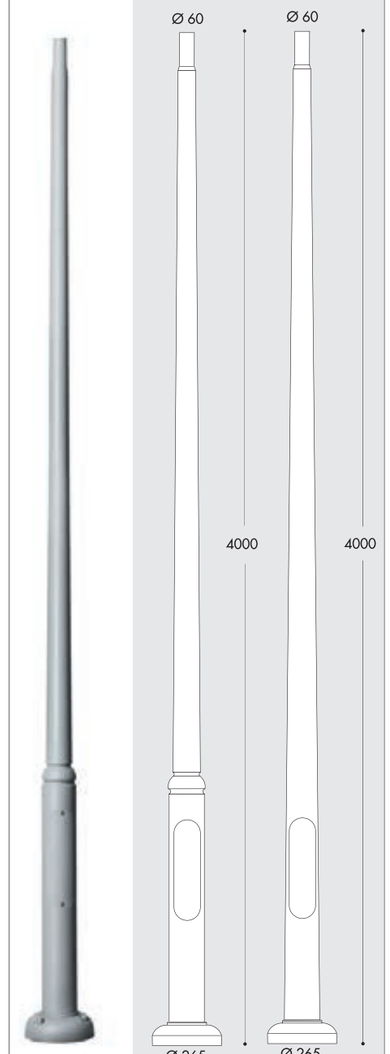

WALL BRACKETS/BASE

IOLE WALL BRACKET

H.243.WAL

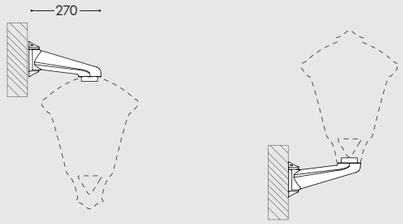




NEW

suitable for:
SERGIO - LUCA

IOLE SYSTEM 1L

000.000.E10






Ø60

NEW

suitable for:
SERGIO - LUCA

MIDIPILAR WALL BRACKET

H.254.WAL

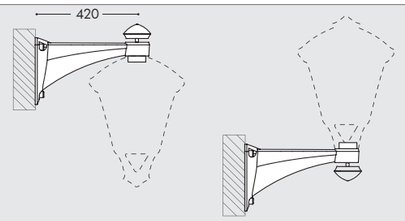




suitable for:
SERGIO - LUCA
GINO 400 - REMO 400
VIVI 400 - ECOVIVI 400
GLOBE 400

MIDIPILAR SYSTEM 1L

000.000.A10





Ø60

suitable for:
SERGIO - LUCA
VIVI 400 - ECOVIVI 400
GLOBE 400


MAXIDISMA BASE

H.117

Ø60



suitable for:
SERGIO - LUCA




MADE IN ITALY

POST TOP SYSTEM

IOLE SYSTEM 2L

000.000.E20






Ø60

NEW

suitable for:
SERGIO - LUCA

IOLE SYSTEM 3L

000.000.E30






Ø60

NEW

suitable for:
SERGIO- LUCA

MIDIPILAR SYSTEM 2L

000.000.A20






Ø60

suitable for:
SERGIO - LUCA
VIVI 400 - ECOVIVI 400
GLOBE 400

MIDIPILAR SYSTEM 3L

000.000.A30





Ø60

suitable for:
SERGIO - LUCA
VIVI 400 - ECOVIVI 400
GLOBE 400



FULLY MODULAR

The unique 60mm hub allows thousands of different possible combinations to create your perfect outdoor light fitting.

MADE IN ITALY



NOEMI

PAG 26





SILOE

PAG 26





TOBIA

PAG 28





SIMON

PAG 28





ELIA

PAG 32





PIETRO

PAG 32





GLOBE

PAG 36



fumagalli since 1973

E35.201.R20.Q1K

3070

NEBO OFIR/
NOEMI 2L
for details see pag. 26

Q43.207.H1L

4180

HOREB/ELIA
for details see pag. 32

NEBO/TOBIA
for details see pag. 28

Q33.201.Q1K

3000

ANTI RUST
LIFETIME
GUARANTEE
NO PAINTING
REQUIRED
MADE IN
ITALY

fumagalli since 1973

U33.113.Q1K

LOT/SIMON
for details see pag. 28

OFIR/NOEMI
for details see pag. 26

E35.132.Q1K

REVIVAL RANGE

CLASSIC RANGE

MODERN RANGE

ADVANTAGES

fumaTech®
FUMAGALLI POLES TECHNOLOGY



ANTI CORROSION



NO MAINTENANCE




UV-RAYS STABILIZED



DOUBLE INSULATION



NOT AFFECTED BY CHEMICAL FERTILIZES



FULLY MODULAR Ø60mm

RESIN POST OF A SINGLE PIECE WITHOUT JOINTS

Stronger, safer and more durable

INNER METAL POLE STRUCTURE
Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.

EXPANSE
High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.


OUTER RESIN COVER
Outer coating of a single piece without joints made of shockproof resin material:
- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire

MADE IN ITALY


SUGGESTED COMBINATIONS



DIFFUSER




OFIR SYSTEM
2L - 3L

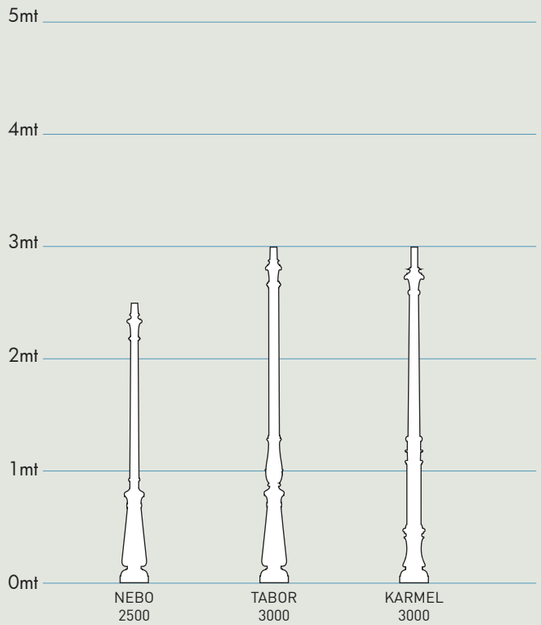





DIFFUSER




ADAM SYSTEM
2L - 3L

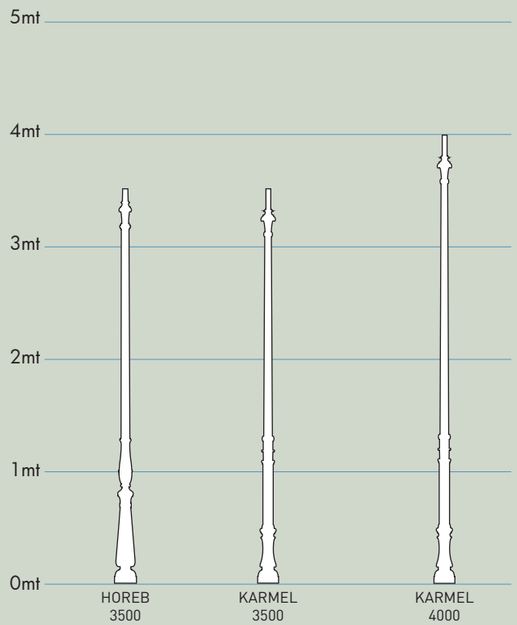


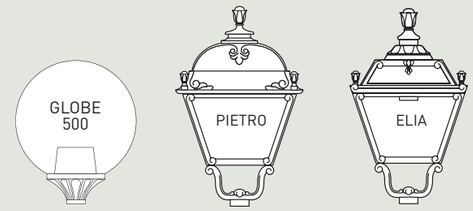

DIFFUSER

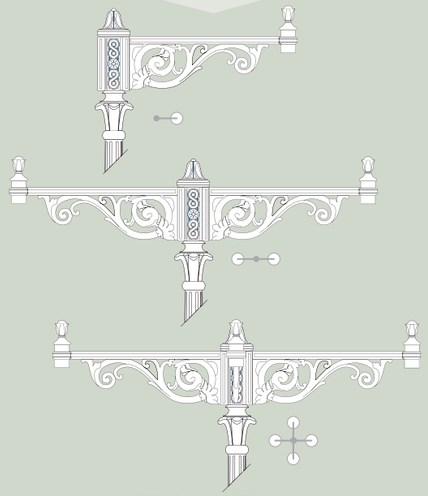

ARON SYSTEM
1L - 2L - 4L

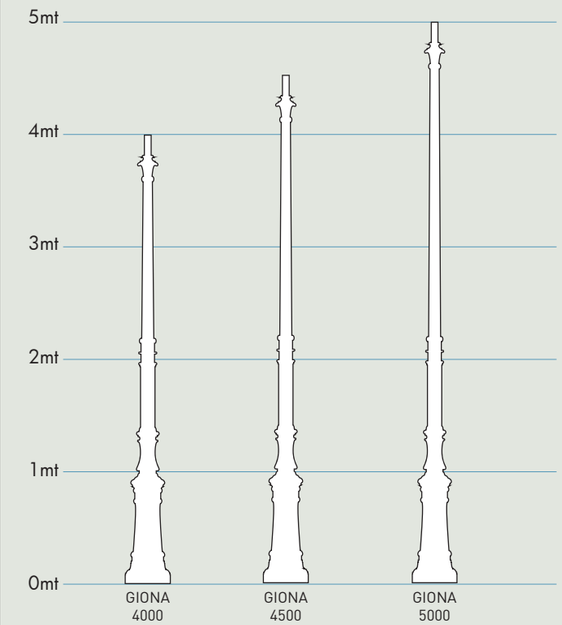

NOEMI/SILOE

SILOE NOEMI

fumagalli since 1973

MADE IN ITALY

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

30W (3620 lm)
50W (6550 lm)

More details at page 73

E27 HIGH POWER LED VERSIONS	
30W HIGH POWER LED	50W HIGH POWER LED

AVAILABLE COLORS	
RESIN BODY *(MOULDED COLOURS)*	DIFFUSER
BLACK **(A)** WHITE **(W)**	CLEAR **(X)** OPAL **(Y)**

NEW


ETL LISTED c US Intertek

UV-TREATED · ANTI-SHOCK · RECYCLABLE · CE · CB IECEE CB SCHEME · IP55 · CLASS II DOUBLE INSULATION

NOEMI-SILOE 30W HIGH POWER LED

LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	CCT SETTABLE	
E27 HIGH POWER LED  Ø 100	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K CCT SET	NOEMI-SILOE = 70W HQI-SON


NOEMI-SILOE 50W HIGH POWER LED

LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	NOEMI-SILOE = 100W HQI-SON


NOEMI




30W LED	CCT SET	E35.000.Q1K
50W LED	4000K	E35.000.H1L
	3000K	E35.000.H1R



SILOE

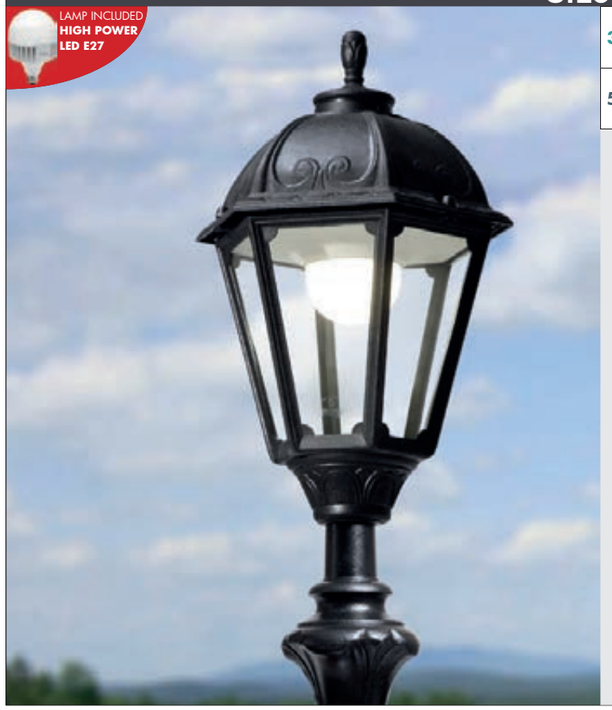

30W LED	CCT SET	K35.000.Q1K
50W LED	4000K	K35.000.H1L
	3000K	K35.000.H1R



TOBIA/SIMON HIGH POWER LED

TOBIA SIMON ELIA PIETRO

fumagalli since 1973

MADE IN ITALY

E27 HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30° | 90% HUMIDITY

VOLTAGE SURGE RESISTANT

30W (3620 lm)
50W (6550 lm)


More details at page 73


E27 HIGH POWER LED VERSIONS	
30W HIGH POWER LED	50W HIGH POWER LED

AVAILABLE COLORS	
RESIN BODY *(MOULDED COLOURS)*	DIFFUSER
BLACK **(A)** WHITE **(W)**	CLEAR **(X)** OPAL **(Y)**

NEW

UV-TREATED · ANTI-SHOCK · RECYCLABLE · CE · CB IECEE CB SCHEME · IP55 · CLASS II DOUBLE INSULATION


TOBIA-SIMON 30W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	CCT SETTABLE	
E27 HIGH POWER LED  Ø 100	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K CCT SET	TOBIA-SIMON = 70W HQI-SON

TOBIA-SIMON 50W HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	TOBIA-SIMON = 100W HQI-SON

TOBIA




30W LED	CCT SET	Q33.000.Q1K
50W LED	4000K	Q33.000.H1L
	3000K	Q33.000.H1R



SIMON



30W LED	CCT SET	U33.000.Q1K
50W LED	4000K	U33.000.H1L
	3000K	U33.000.H1R



TOBIA/SIMON GX53 LED

TOBIA SIMON ELIA PIETRO

fumagalli since 1973

MADE IN ITALY

FLAT DIFFUSER

GX53 LED VERSION

4x GX53



CCT SETTABLE

3000 K | 4000 K | 6500 K

SDCM <6

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)		DIFFUSER	
BLACK **(A)**	WHITE **(W)**	CLEAR **(X)**	OPAL **(Y)**



UV-TREATED · ANTI-SHOCK · RECYCLABLE · CE · IP55 · CLASS II DOUBLE INSULATION · ZONE 1

TOBIA-SIMON 40W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
GX53 LED	4x10W **40W**	**5160 lm**	**100-240V** 50/60 Hz	6500K/4000K/3000K CCT SET	**TOBIA-SIMON** = **100W** HQI-SON

TOBIA


LAMP INCLUDED: **4x GX53 LED**

CCT SET LED GX53 LAMP INCLUDED

4x10W **40W**

Q35.000.D4K





SIMON


LAMP INCLUDED: **4x GX53 LED**

CCT SET LED GX53 LAMP INCLUDED

4x10W **40W**

U35.000.D4K



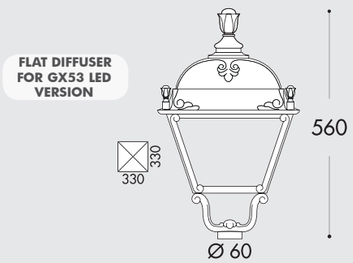

ELIA/PIETRO HIGH POWER LED

TOBIA SIMON **ELIA** **PIETRO**

fumagalli since 1973

MADE IN ITALY

NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30° | 90% HUMIDITY

VOLTAGE SURGE RESISTANT

50W (6550 lm)
60W (7600 lm)


More details at page 73

AVAILABLE COLORS


RESIN BODY (MOULDED COLOURS)		DIFFUSER	
BLACK **(A)**	WHITE **(W)**	CLEAR **(X)**	OPAL **(Y)**

U.V. UV-TREATED · ANTI-SHOCK · RECYCLABLE · CE · CB IECEE CB SCHEME · IP55 · CLASS II DOUBLE INSULATION

ELIA-PIETRO 50W HIGH POWER LED

LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K 3000K	ELIA-PIETRO = 70W HQI-SON

ELIA-PIETRO 60W HIGH POWER LED


LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED  Ø 138	60W	7600 lm	100-240V 50/60 Hz	4000K 3000K	ELIA-PIETRO = 100W HQI-SON

ELIA

LAMP INCLUDED **HIGH POWER LED E27**



50W	4000K	Q43.000.H1L
	3000K	Q43.000.H1R
60W	4000K	Q43.000.W1L
	3000K	Q43.000.W1R

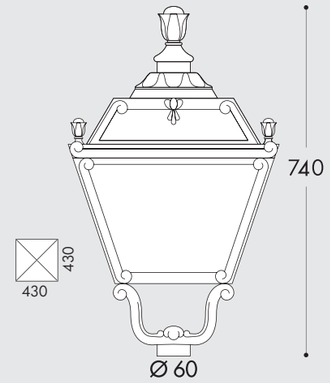


PIETRO

LAMP INCLUDED **HIGH POWER LED E27**



50W	4000K	U43.000.H1L
	3000K	U43.000.H1R
60W	4000K	U43.000.W1L
	3000K	U43.000.W1R

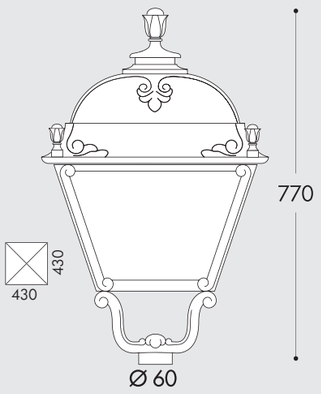

ELIA/PIETRO GX53 LED

TOBIA SIMON **ELIA** **PIETRO**

fumagalli since 1973

MADE IN ITALY



GX53 LED VERSION

8x GX53 LED

CCT SETTABLE

3000 K | 4000 K | 6500 K

SDCM <6

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)		DIFFUSER	
BLACK **(A)**	WHITE **(W)**	CLEAR **(X)**	OPAL **(Y)**

UV-TREATED · ANTI-SHOCK · RECYCLABLE · CE · IP55 · CLASS II DOUBLE INSULATION · ZONE 1

ELIA-PIETRO 80W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
GX53 LED	8x10W **80W**	**10320 lm**	**100-240V** 50/60 Hz	6500K/4000K/3000K CCT SET	**ELIA-PIETRO** = **150W** HQI-SON


ELIA



8x10W **80W**

Q45.000.D8K

FLAT DIFFUSER FOR GX53 LED VERSION

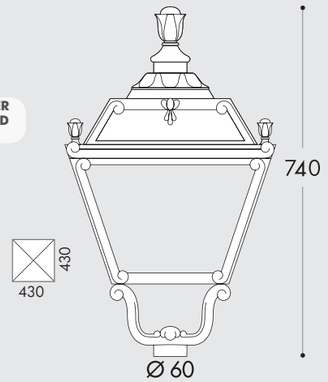


PIETRO



8x10W **80W**

U45.000.D8K

FLAT DIFFUSER FOR GX53 LED VERSION

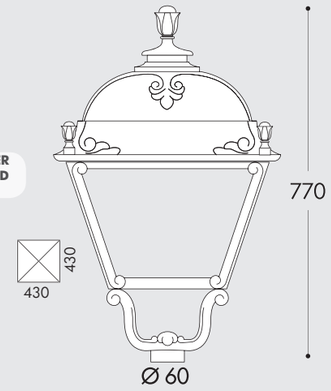

GLOBE 400/GLOBE 500

GLOBE 400 CLASSIC


GLOBE 500 CLASSIC

fumagalli since 1973

MADE IN ITALY

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)		DIFFUSER		
BLACK **(A)**	WHITE **(W)**	CLEAR **(X)**	OPAL **(Y)**	SMOKED **(Z)**

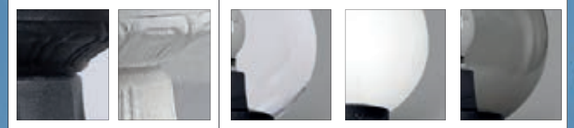

UV-TREATED · ANTI-SHOCK · RECYCLABLE · CE · IP55 · CLASS II DOUBLE INSULATION

GLOBE 400



E27	G40.B40.E27


ALUMINIUM CHROME LOUVRE



UPWARD **.FC1**



DOWNWARD **.FC6**



GLOBE 500



E27	G50.B50.E27
E40	G50.B50.E40


ALUMINIUM CHROME LOUVRE



UPWARD **.FC1**



DOWNWARD **.FC6**



E27 VERSION

SUITABLE FOR HQI - SON


POLES













FumaTech®
FUMAGALLI POLES TECHNOLOGY

EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION


NEBO	
without door	000.201
with door	000.202
with door & box	000.203

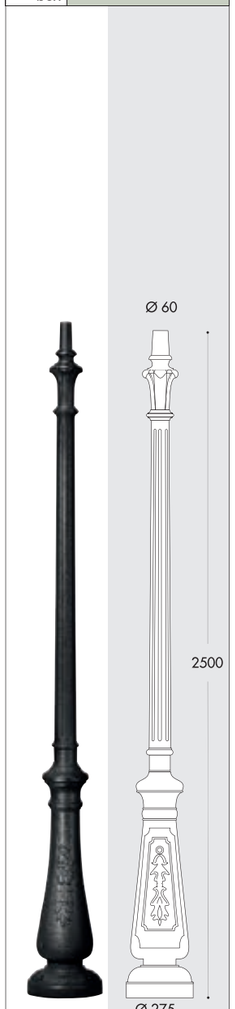


TABOR	
without door	000.204
with door	000.205
with door & box	000.206

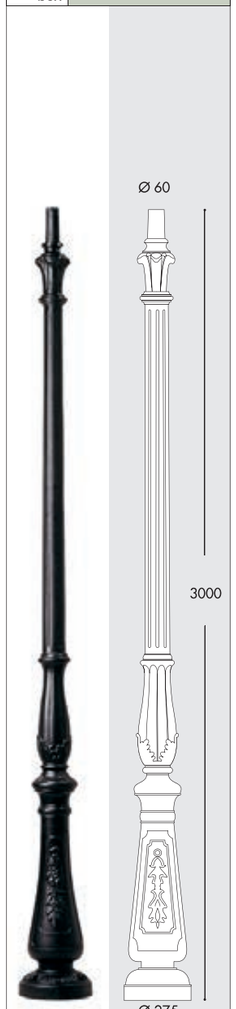


HOREB	
without door	000.207
with door	000.208
with door & box	000.209

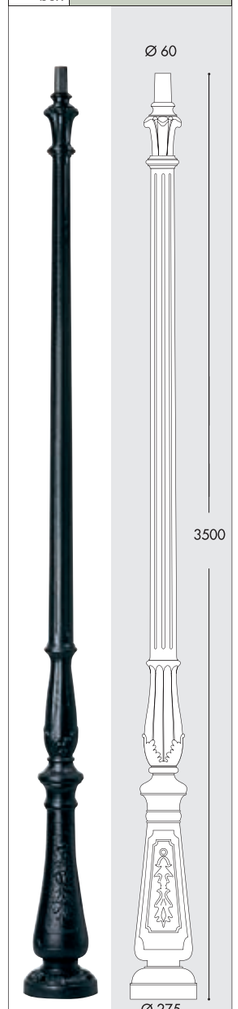

KARMEL 3000	
without door	000.231
with door	000.232
with door & box	000.233

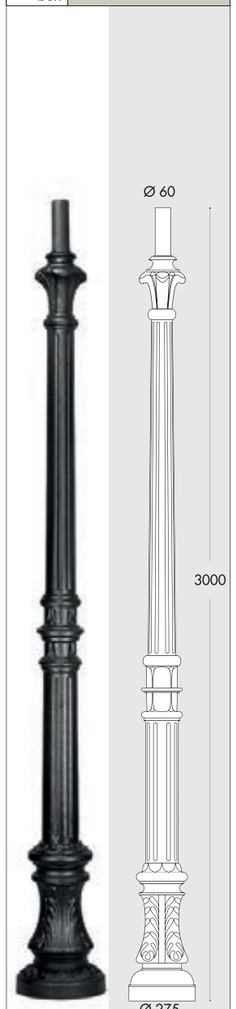

KARMEL 3500	
without door	000.234
with door	000.235
with door & box	000.236

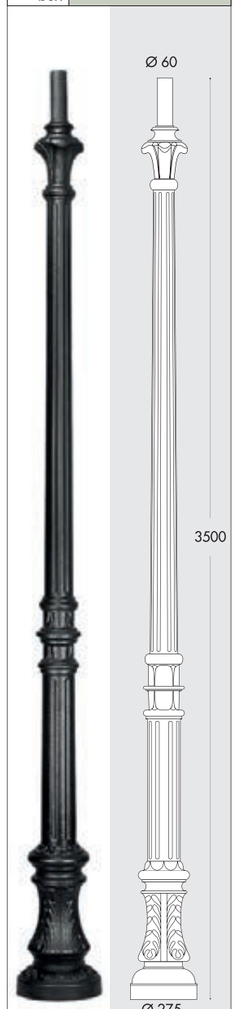

MADE IN ITALY

AVAILABLE COLORS

MOULDED COLOURS


BLACK **(A)**





WHITE **(W)**




EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION









KARMEL 4000	
without door	000.237
with door	000.238
with door & box	000.239

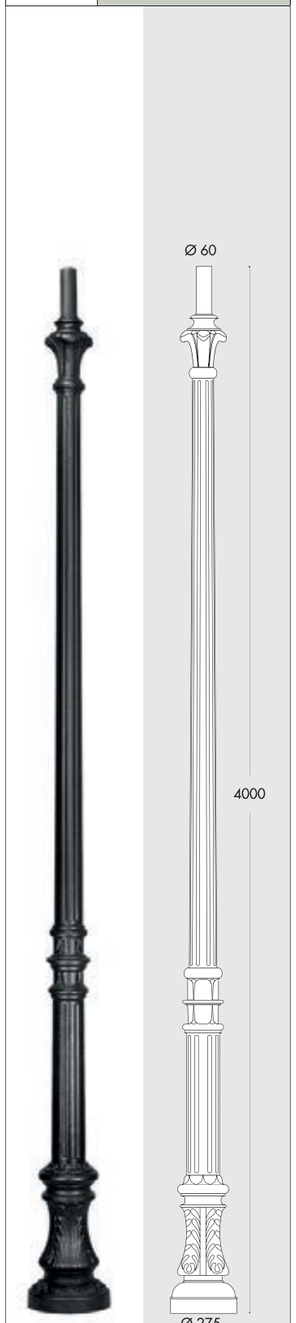


GIONA 4000	
without door	000.221
with door	000.222
with door & box	000.223

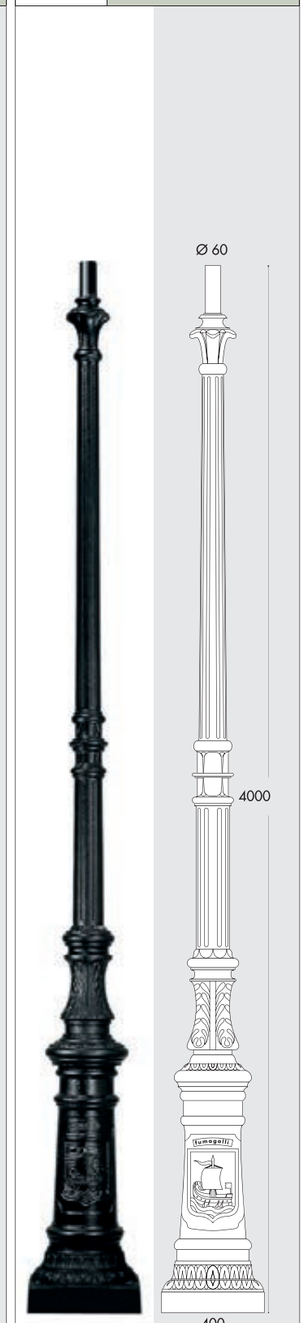

GIONA 4500	
without door	000.224
with door	000.225
with door & box	000.226

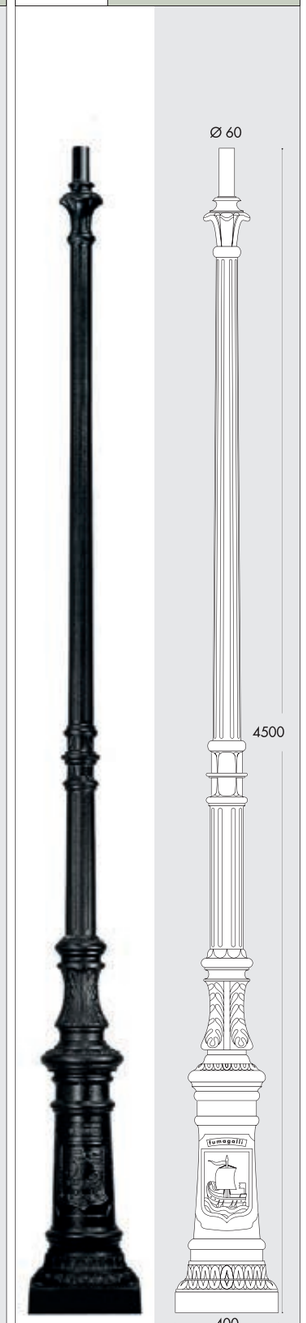


GIONA 5000	
without door	000.227
with door	000.228
with door & box	000.229

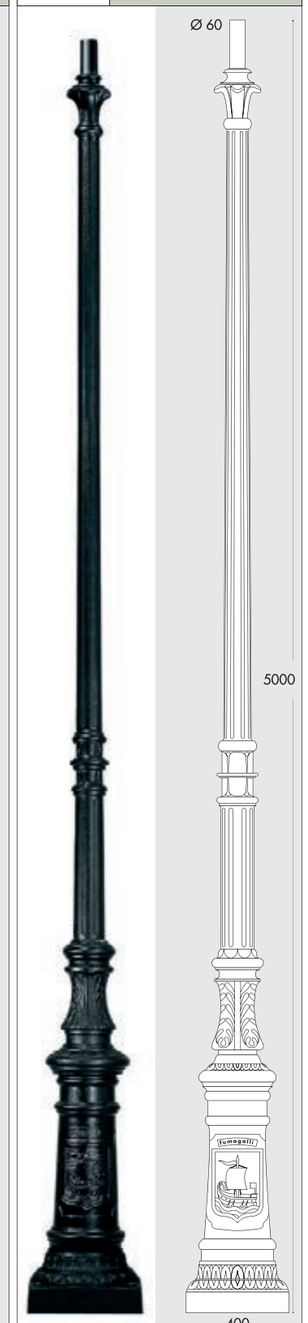

WALL BRACKETS/BASE

OFIR WALL BRACKET

H.132.WAL





suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400




FULLY MODULAR

The unique 60mm hub allows thousands of different possible combinations to create your perfect outdoor light fitting.

ADAM WALL BRACKET

H.171.WAL






suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

LOT BASE

H.113






suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
ELIA - PIETRO
GLOBE 400-500

ARON WALL BRACKET

H.172 + H.172.WAL

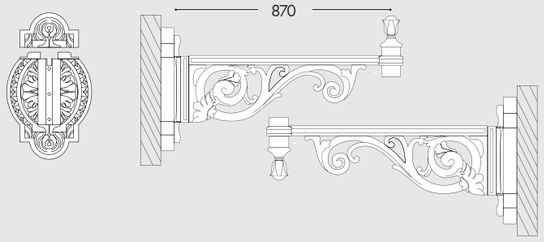




suggested diffuser:
ELIA - PIETRO
GLOBE 500

ARON SYSTEM 1L

000.000.N10






suggested diffuser:
ELIA - PIETRO
GLOBE 500

POST TOP SYSTEMS

OFIR SYSTEM 2L

000.000.R20






suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

OFIR SYSTEM 3L

000.000.R30






suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

ADAM SYSTEM 2L

000.000.M20

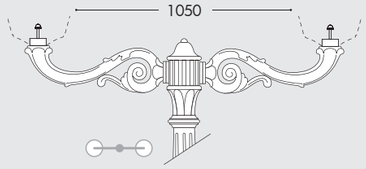




suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

ADAM SYSTEM 3L

000.000.M30

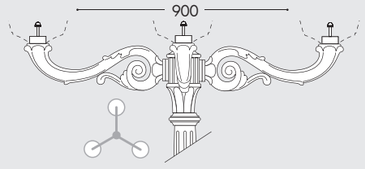




suggested diffuser:
SILOE - NOEMI
SIMON - TOBIA
GLOBE 400

ARON SYSTEM 2L

000.000.N20

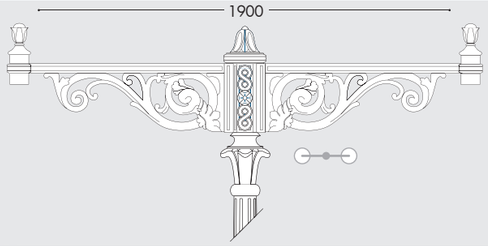




suggested diffuser:
ELIA - PIETRO
GLOBE 500

ARON SYSTEM 4L

000.000.N40

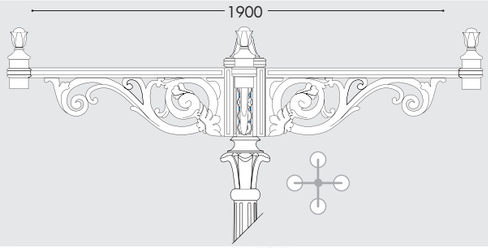



suggested diffuser:
ELIA - PIETRO
GLOBE 500

















GIORGIO

GIORGIO PAG 48
ROSA PAG 48



GINO

GINO400 PAG 54
GINO500 PAG 60



REMO

REMO400 PAG 54
REMO500 PAG 60



VIVI

VIVI400 PAG 50
VIVI500 PAG 56



ECOVIVI

ECOVIVI400 PAG 52
ECOVIVI500 PAG 58



BEPPE

BEPPE400 PAG 50
BEPPE500 PAG 56



ECOBEPPE

ECOBEPPE400 PAG 52
ECOBEPPE500 PAG 58



GLOBE

GLOBE400 PAG 62
GLOBE500 PAG 62



fumagalli since 1973

EKTOR 3000
MIDIPILAR/
VIVI 400 1L
for details see pag. 50

3255

V50.364.A10.Q1K

P50.361.Q1K

EKTOR 2500/
BEPPE 400
for details see pag. 50

3065

EKTOR 2500/
GIORGIO
for details see pag. 48

4P2.361.G10.E28

2700

ANTI RUST
LIFETIME
GUARANTEE
NO PAINTING REQUIRED
MADE IN ITALY

fumagalli since 1973

R50.254.Q1K

MIDIPILAR/
REMO 400
for details see pag. 54

F50.115.Q1K

NEW LOT/
GINO 400
for details see pag. 54

REVIVAL RANGE
CLASSIC RANGE
MODERN RANGE

SUGGESTED COMBINATIONS

ADVANTAGES

FumaTech®
FUMAGALLI POLES TECHNOLOGY



ANTI CORROSION



NO MAINTENANCE




UV-RAYS STABILIZED




DOUBLE INSULATION




NOT AFFECTED BY CHEMICAL FERTILIZES




FULLY MODULAR Ø60mm

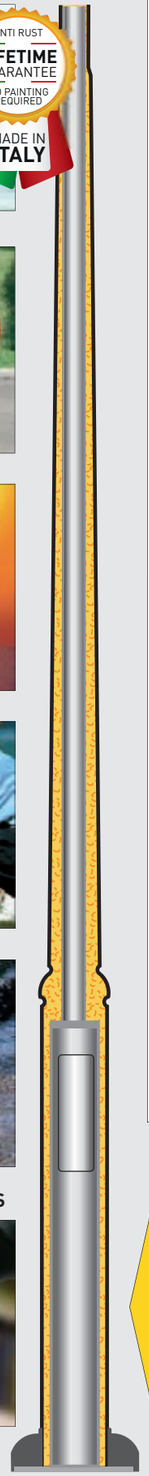

SINGLE LIGHT

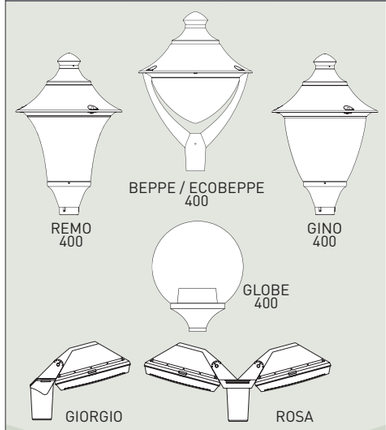


DIFFUSER

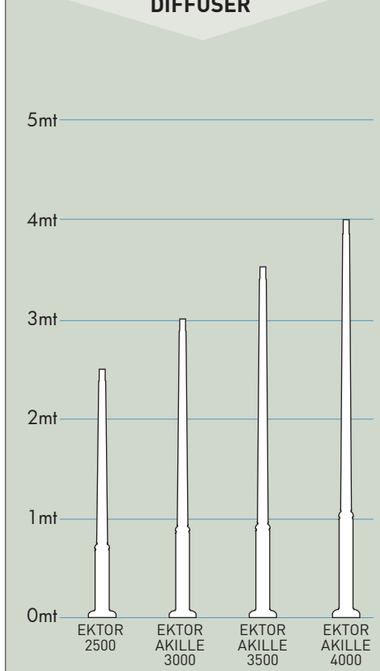


POST

SINGLE LIGHT

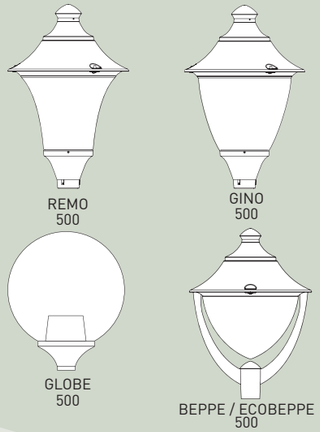


DIFFUSER

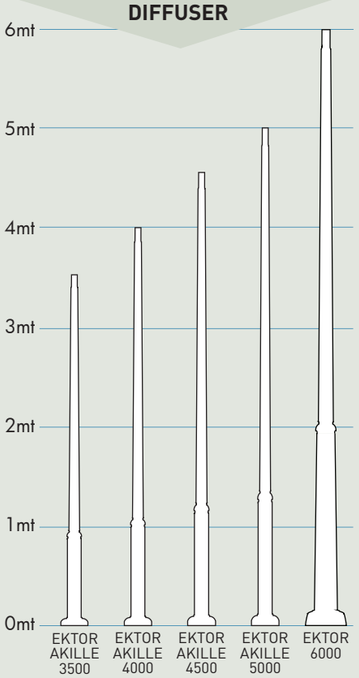

POST

RESIN POST OF A SINGLE PIECE WITHOUT JOINTS
Stronger, safer and more durable

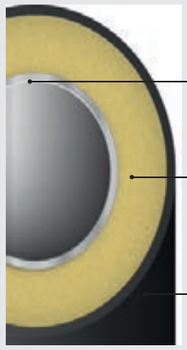

INNER METAL POLE STRUCTURE
Structural metal pole hot deep galvanized inside and outside by zinc bath immersion.


EXPANSE
High Density rigid polyurethane provides lightweight and durable cohesion between the inner metal post and the outer resin cover.

OUTER RESIN COVER
Outer coating of a single piece without joints made of shockproof resin material:
- Rust and corrosion-free
- Paste molded colors, UV stabilized
- Self-extinguishing on fire


MULTI-HEAD LIGHTS



DIFFUSER

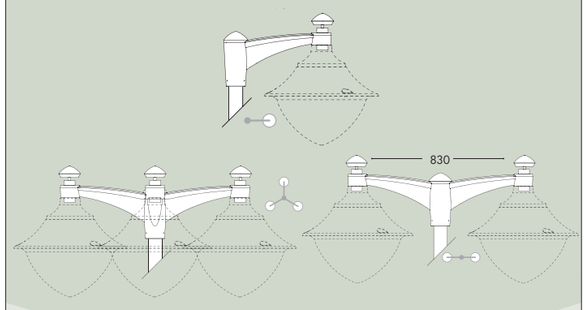


MIDIPILAR 1L - 2L - 3L

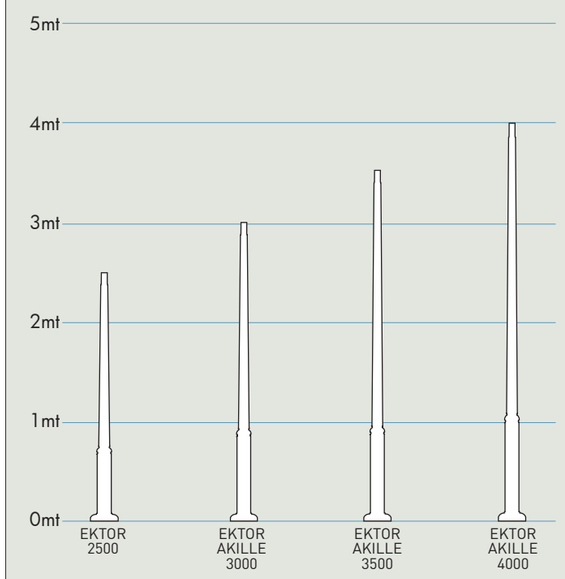


POST


MULTI-HEAD LIGHTS

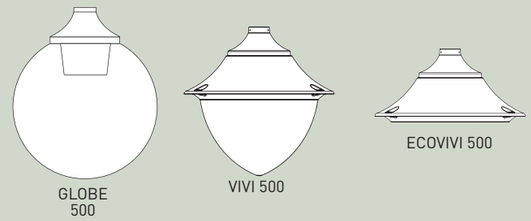

DIFFUSER

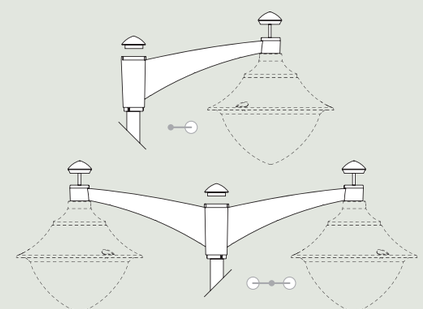

PILAR 1L - 2L

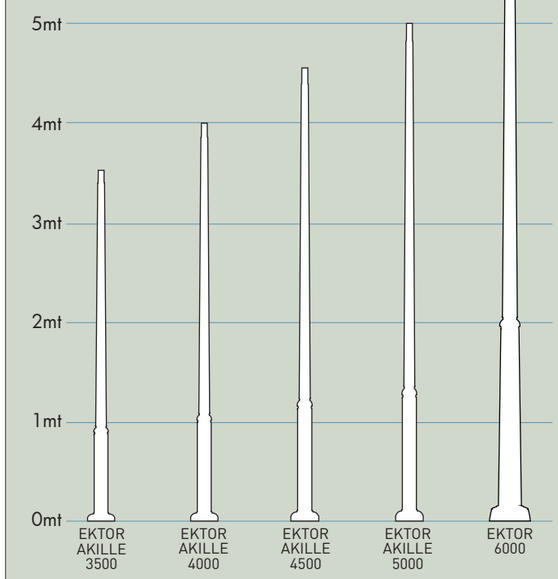

POST

MODERN RANGE

GIORGIO/ROSA

GIORGIO ROSA

fumagalli since 1973

MADE IN ITALY

CCT SETTABLE

3000 K | 4000 K | 6500 K

SDCM <6

GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)			DIFFUSER
BLACK **(A)**	GREY **(L)**	WHITE **(W)**	OPAL **(Y)**

AVAILABLE VERSIONS

NEW

GX53 LED	4x GX53	2x E27
NEW VERSION REDUCED PRICE	4X GX53	CFL / LED
GX53 LED · CCT SET · LED GX53	CCT SET · LED GX53	

UV-TREATED · ANTI-SHOCK · RECYCLABLE · CE · CB IECEE CB SCHEME · IP66 · CLASS II DOUBLE INSULATION

GIORGIO-ROSA 4 x GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
GX53 LED	4x10W **40W**	**5160 lm**	**100-240V** 50/60 Hz	6500K/4000K/3000K CCT SET	**GIORGIO-ROSA** = **100W** HQI-SON

NEW


LED BULKHEAD GX53-CCT & WATT SETTABLE					
LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	VOLTAGE RANGE	CCT SETTABLE	
GX53 LED	**15W** WATT SET **9W** eco mode	**1940 lm** **1300 lm**	**100-240V** 50/60 Hz	4000K/2700K CCT SET	=150W INCANDESCENT / =100W INCANDESCENT

GX53 LED — GIORGIO — 2xE27

LAMP INCLUDED: **4x GX53 LED**

2xE27		4P2.000.G10.E28
4x10W **40W**	CCT SET	4P2.000.G10.D4K
GX53 LED **15W**	CCT SET + WATT SET	4P1.000.G10.E1P



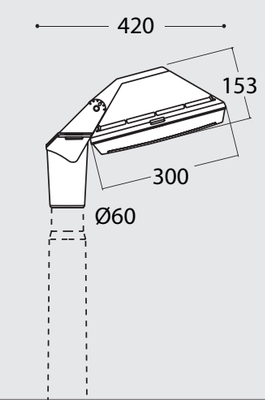




GX53 LED — ROSA — 2xE27

LAMP INCLUDED: **8x GX53 LED**

2xE27		4P2.000.G20.E28
2x40W **80W**		4P2.000.G20.D4K
GX53 LED 2x15W **30W**	CCT SET + WATT SET	4P1.000.G20.E1P







REVIVAL RANGE

CLASSIC RANGE

MODERN RANGE

MADE IN ITALY

VIVI/BEPPE 400

BEPPE400 · VIVI400 · BEPPE500 · VIVI500

fumagalli since 1973

MADE IN ITALY

NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30° · 90% HUMIDITY

VOLTAGE SURGE RESISTANT

30W (3620 lm)
50W (6550 lm)

More details at page 73

AVAILABLE COLORS	
RESIN BODY (MOULDED COLOURS)	DIFFUSER
BLACK **(A)** · GREY **(L)** · WHITE **(W)**	CLEAR **(X)** · OPAL **(Y)**

UV-TREATED · ANTI-SHOCK · RECYCLABLE · CE · CB IECEE CB SCHEME · IP55 · CLASS II DOUBLE INSULATION

VIVI-BEPPE 400 GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
GX53	6x10W **60W**	**7740 lm**	**100-240V** 50/60 Hz	6500K/4000K/3000K CCT SET	VIVI-BEPPE 400 = **100W** HQI-SON

VIVI-BEPPE 400 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED Ø 100	**30W**	**3620 lm**	**100-240V** 50/60 Hz	4000K/3000K CCT SET	VIVI-BEPPE 400 = **50W** HQI-SON
E27 HIGH POWER LED Ø 118	**50W**	**6550 lm**	**100-240V** 50/60 Hz	4000K	VIVI-BEPPE 400 = **70W** HQI-SON
				3000K	


GX53 LED — VIVI 400 — HIGH POWER LED

LAMP INCLUDED: **6x GX53 LED**

LAMP INCLUDED **HIGH POWER LED E27**



30W	CCT SET	V50.000.Q1K
50W	4000K	V50.000.H1L
	3000K	V50.000.H1R
6x10W **60W**	CCT SET	V50.000.D6K






GX53 LED — BEPPE 400 — HIGH POWER LED

LAMP INCLUDED: **6x GX53 LED**

LAMP INCLUDED **HIGH POWER LED E27**



30W	CCT SET	P50.000.Q1K
50W	4000K	P50.000.H1L
	3000K	P50.000.H1R
6x10W **60W**	CCT SET	P50.000.D6K





ECOVIVI/ECOBEPPE 400

ECOBEPPE400 ECOVIVI400 ECOBEPPE500 ECOVIVI500

fumagalli since 1973

MADE IN ITALY

CCT SETTABLE

3000 K | 4000 K | 6500 K

SDCM <6

GX53 MODULAR LED LIGHT SYSTEM



- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)			DIFFUSER
BLACK **(A)**	GREY **(L)**	WHITE **(W)**	CLEAR **(X)**



UV-TREATED · ANTI-SHOCK · RECYCLABLE · CE · IP55 · CLASS II DOUBLE INSULATION · ZONE 1


ECOVIVI-ECOBEPPE 400 60W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
GX53	6x10W **60W**	**7740 lm**	**100-240V** 50/60 Hz	6500K/4000K/3000K CCT SET	**ECOVIVI-ECOBEPPE 400** = **100W** HQI-SON

GX53 LED — ECOVIVI 400 — E27

LAMP INCLUDED: **6x GX53 LED**



E27	EV4.000.E27
E40	EV4.000.E40
6x10W **60W** CCT SET	EV4.000.D6K





E27 VERSION


SUITABLE FOR HQI - SON

GX53 LED — ECOBEPPE 400 — E27

LAMP INCLUDED: **6x GX53 LED**



E27	EP5.000.E27
E40	EP5.000.E40
6x10W **60W** CCT SET	EP5.000.D6K






E27 VERSION

SUITABLE FOR HQI - SON

MODERN RANGE

GINO/REMO 400



fumagalli since 1973



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

30W (3620 lm)
50W (6550 lm)

More details at page 73

AVAILABLE COLORS	
RESIN BODY (MOULDED COLOURS)	DIFFUSER
BLACK **(A)** · GREY **(L)** · WHITE **(W)**	CLEAR **(X)** · OPAL **(Y)**

UV-TREATED · ANTI-SHOCK · RECYCLABLE · IECEE CB SCHEME · IP55 · CLASS II DOUBLE INSULATION

GINO-REMO 400 GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
GX53	6x10W **60W**	**7740 lm**	**100-240V** 50/60 Hz	6500K/4000K/3000K CCT SET	**GINO-REMO 400** = **100W** HQI-SON


GINO-REMO 400 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED Ø 100	**30W**	**3620 lm**	**100-240V** 50/60 Hz	4000K/3000K CCT SET	**GINO-REMO 400** = **50W** HQI-SON
E27 HIGH POWER LED Ø 118	**50W**	**6550 lm**	**100-240V** 50/60 Hz	4000K	**GINO-REMO 400** = **70W** HQI-SON
				3000K	

GX53 LED — GINO 400 — HIGH POWER LED

LAMP INCLUDED: **6x GX53** GX53 **LED**



30W	CCT SET	F50.000.Q1K
50W	4000K	F50.000.H1L
	3000K	F50.000.H1R
6x10W **60W**	CCT SET	F50.000.D6K



LAMP INCLUDED **HIGH POWER LED E27**




GX53 LED — REMO 400 — HIGH POWER LED

LAMP INCLUDED: **6x GX53** GX53 **LED**



30W	CCT SET	R50.000.Q1K
50W	4000K	R50.000.H1L
	3000K	R50.000.H1R
6x10W **60W**	CCT SET	R50.000.D6K

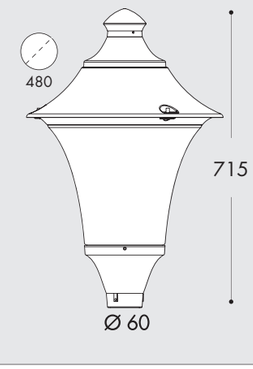

LAMP INCLUDED **HIGH POWER LED E27**



VIVI/BEPPE 500

BEPPE400 · VIVI400 · **BEPPE500** · **VIVI500**

fumagalli since 1973



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

50W (6550 lm)
60W (7600 lm)

More details at page 73

AVAILABLE COLORS	
RESIN BODY (MOULDED COLOURS)	**DIFFUSER**
BLACK **(A)** · GREY **(L)** · WHITE **(W)**	CLEAR **(X)** · OPAL **(Y)**

UV TREATED · ANTI-SHOCK · RECYCLABLE · CE · CB IECEE CB SCHEME · IP55 · CLASS II DOUBLE INSULATION

VIVI-BEPPE 500 GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
GX53 LED	9x10W **90W**	**11610m**	**100-240V** 50/60 Hz	6500K/4000K/3000K CCT SET	**VIVI-BEPPE 500** = **150W** HQI-SON

VIVI-BEPPE 500 HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED Ø 118	**50W**	**6550 lm**	**100-240V** 50/60 Hz	4000K	**VIVI-BEPPE 500** = **70W** HQI-SON
				3000K	
E27 HIGH POWER LED Ø 138	**60W**	**7600 lm**	**100-240V** 50/60 Hz	4000K	**VIVI-BEPPE 500** = **100W** HQI-SON
				3000K	


GX53 LED — VIVI 500 — HIGH POWER LED


LAMP INCLUDED: **9x GX53 LED**

LAMP INCLUDED **HIGH POWER LED E27**

50W	4000K	V60.000.H1L
	3000K	V60.000.H1R
60W	4000K	V60.000.W1L
	3000K	V60.000.W1R
9x10W **90W**	CCT SET	V60.000.D9K





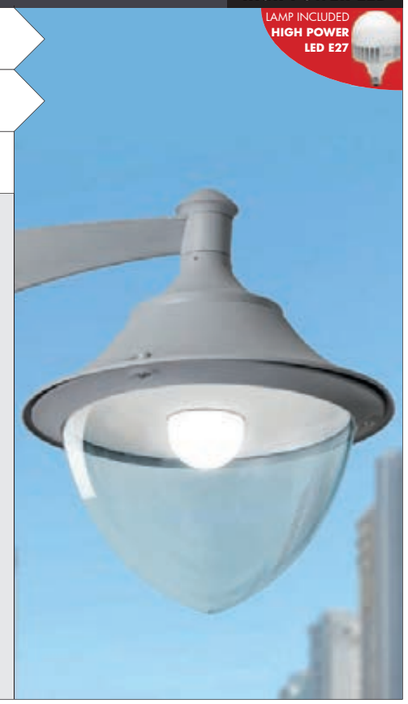


GX53 LED — BEPPE 500 — HIGH POWER LED

LAMP INCLUDED: **9x GX53 LED**

LAMP INCLUDED **HIGH POWER LED E27**

50W	4000K	P60.000.H1L
	3000K	P60.000.H1R
60W	4000K	P60.000.W1L
	3000K	P60.000.W1R
9x10W **90W**	CCT SET	P60.000.D9K



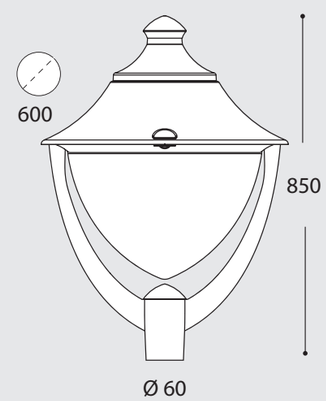



MADE IN ITALY

ECOVIVI/ECOBEPPE 500

ECOBEPPE400 · ECOVIVI400 · **ECOBEPPE500** · **ECOVIVI500**

fumagalli since 1973



CCT SETTABLE

3000 K · 4000 K · 6500 K

SDCM <6

GX53 MODULAR LED LIGHT SYSTEM

- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)			DIFFUSER
BLACK **(A)**	GREY **(L)**	WHITE **(W)**	CLEAR **(X)**

U.V. UV-TREATED · ANTI-SHOCK · RECYCLABLE · CE · IP55 · CLASS II DOUBLE INSULATION · ZONE 1


ECOVIVI-ECOBEPPE 500 90W GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
GX53 LED	9x10W **90W**	**11610 lm**	**100-240V** 50/60 Hz	6500K/4000K/3000K CCT SET	**ECOVIVI - ECOBEPPE 500** = **150W** HQI-SON

GX53 LED — ECOVIVI 500 — E27

LAMP INCLUDED: **9x GX53 LED**



E27	EV6.000.E27	
E40	EV6.000.E40	
9x10W **90W**	CCT SET	EV6.000.D9K






E27 VERSION
SUITABLE FOR HQI - SON

GX53 LED — ECOBEPPE 500 — E27

LAMP INCLUDED: **9x GX53 LED**



E27	EP6.000.E27	
E40	EP6.000.E40	
9x10W **90W**	CCT SET	EP6.000.D9K

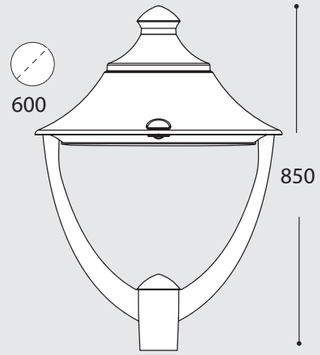



E27 VERSION
SUITABLE FOR HQI - SON

GINO/REMO 500

REMO400 GINO400 **REMO500** **GINO500**

fumagalli since 1973



NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

50W (6550 lm)
60W (7600 lm)

More details at page 73

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)			DIFFUSER	
BLACK **(A)**	GREY **(L)**	WHITE **(W)**	CLEAR **(X)**	OPAL **(Y)**

UV TREATED · ANTI-SHOCK · RECYCLABLE · CE · CB IECEE CB SCHEME · IP55 · CLASS II DOUBLE INSULATION

GINO-REMO 500 GX53 LED

LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
GX53 LED	9x10W **90W**	**11610 lm**	**100-240V** 50/60 Hz	6500K/4000K/3000K CCT SET	**GINO-REMO 500** = **148W** HQI-SON

GINO-REMO 500 HIGH POWER LED

LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED Ø 118	**50W**	**6550 lm**	**100-240V** 50/60 Hz	4000K	**GINO-REMO 500** = **70W** HQI-SON
				3000K	
E27 HIGH POWER LED Ø 138	**60W**	**7600 lm**	**100-240V** 50/60 Hz	4000K	**GINO-REMO 500** = **100W** HQI-SON
				3000K	


GX53 LED — GINO 500 — HIGH POWER LED

LAMP INCLUDED: **9x GX53 LED**

LAMP INCLUDED **HIGH POWER LED E27**



50W	4000K	F60.000.H1L
	3000K	F60.000.H1R
60W	4000K	F60.000.W1L
	3000K	F60.000.W1R
9x10W **90W**	CCT SET	F60.000.D9K

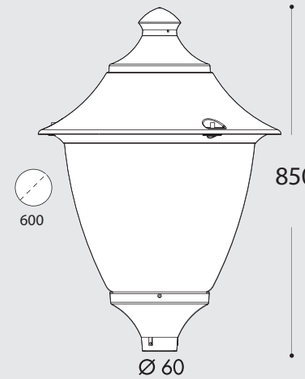




GX53 LED — REMO 500 — HIGH POWER LED

LAMP INCLUDED: **9x GX53 LED**

LAMP INCLUDED **HIGH POWER LED E27**



50W	4000K	R60.000.H1L
	3000K	R60.000.H1R
60W	4000K	R60.000.W1L
	3000K	R60.000.W1R
9x10W **90W**	CCT SET	R60.000.D9K

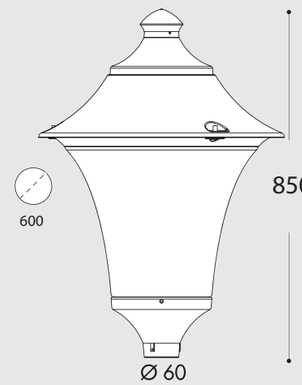



GLOBE 400/GLOBE 500

GLOBE 400 MODERN

GLOBE 500 MODERN

fumagalli since 1973

MADE IN ITALY

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)			DIFFUSER		
BLACK **(A)**	GREY **(L)**	WHITE **(W)**	CLEAR **(X)**	OPAL **(Y)**	SMOKED **(Z)**



UV-TREATED · ANTI-SHOCK · RECYCLABLE · CE · IP55 · CLASS II DOUBLE INSULATION

GLOBE 400



E27	G41.B40.E27


ALUMINIUM CHROME LOUVRE



UPWARD **.FC1**



DOWNWARD **.FC6**



GLOBE 500



E27	G51.B50.E27
E40	G51.B50.E40


ALUMINIUM CHROME LOUVRE



UPWARD **.FC1**



DOWNWARD **.FC6**



E27 VERSION

SUITABLE FOR

HQI - SON

POLES











fumaTech®
FUMAGALLI POLES TECHNOLOGY


EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION

EKTOR 2500	
without door	000.361
with door	000.362
with door & box	000.363

EKTOR 3000	AKILLE 3000
without door 000.364	000.414
with door 000.365	000.415
with door & box 000.366	000.416

EKTOR 3500	AKILLE 3500
without door 000.367	000.417
with door 000.368	000.418
with door & box 000.369	000.419

EKTOR 4000	AKILLE 4000
without door 000.371	000.421
with door 000.372	000.422
with door & box 000.373	000.423

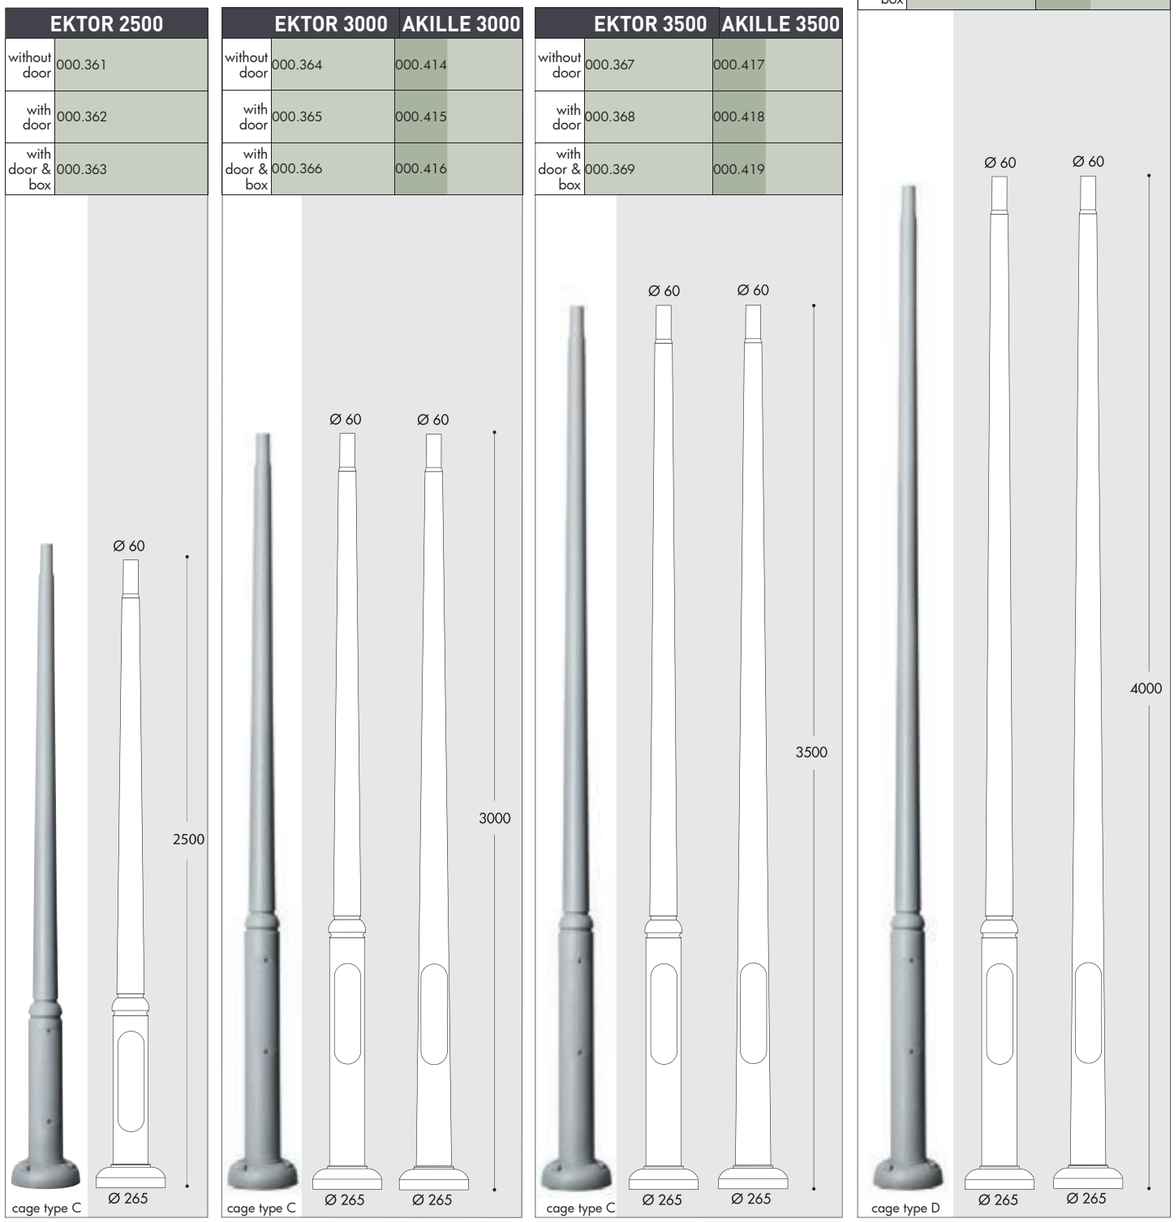


MADE IN ITALY

AVAILABLE COLORS
MOULDED COLOURS




EACH POST IS SUPPLIED WITH THE SUITABLE CAGE FOR FIXATION

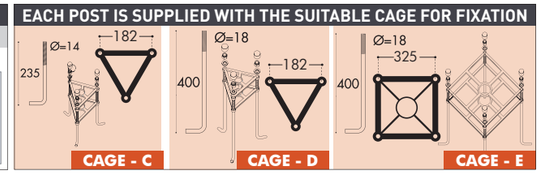

EKTOR 4500	AKILLE 4500
without door 000.374	000.424
with door 000.375	000.425
with door & box 000.376	000.426

EKTOR 5000	AKILLE 5000
without door 000.377	000.427
with door 000.378	000.428
with door & box 000.379	000.429


EKTOR 6000	
without door	000.384
with door	000.385
with door & box	000.386

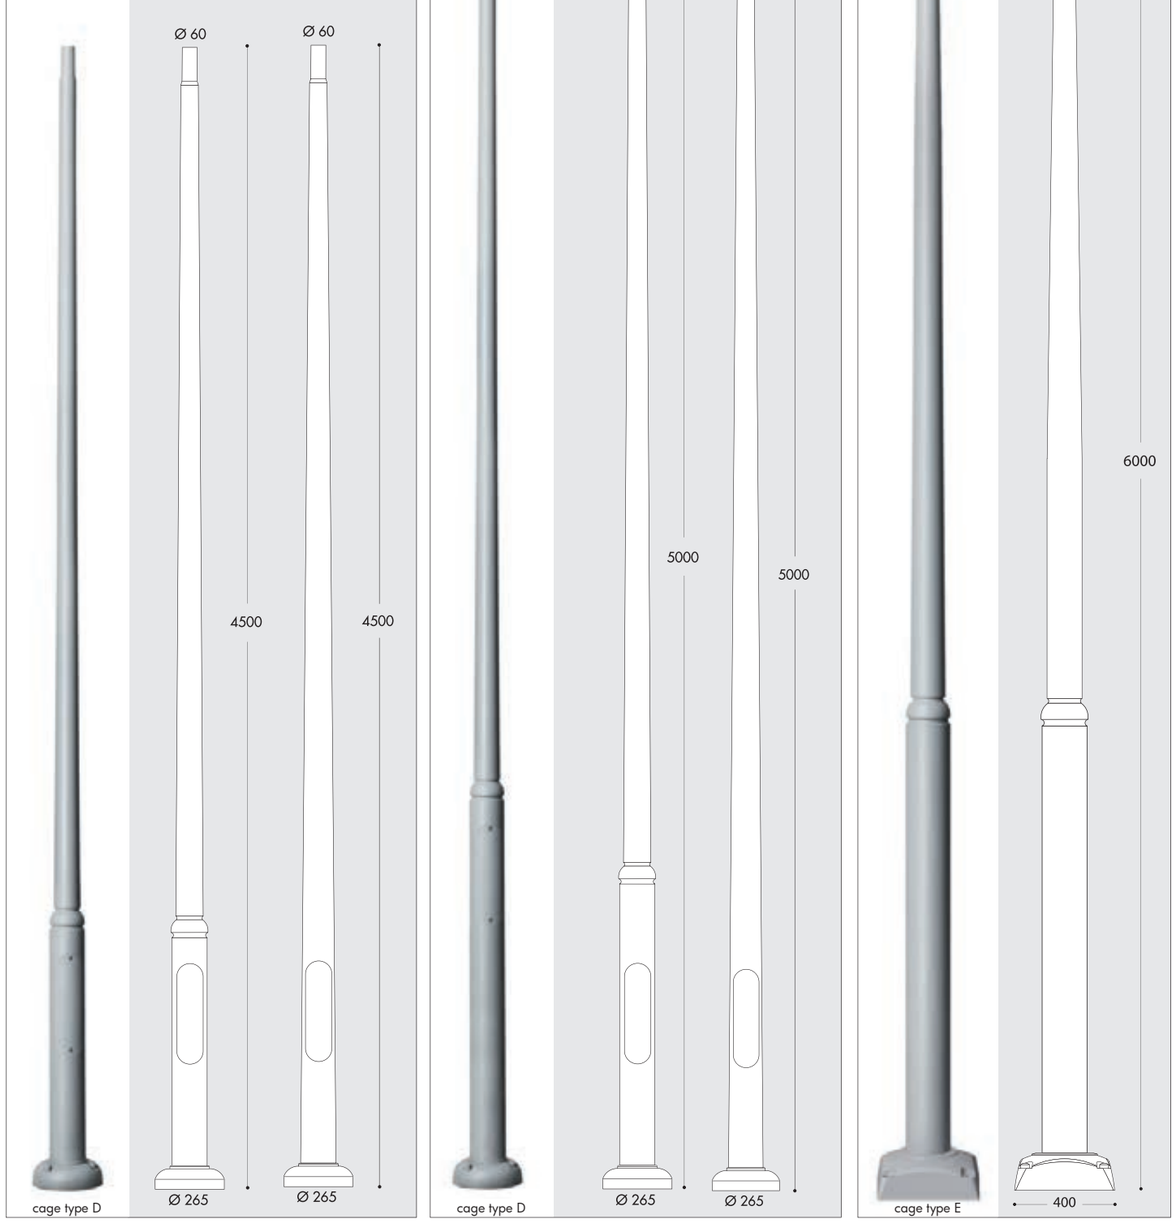

WALL BRACKETS/BASE

MIDIPILAR WALL BRACKET

H.254.WAL

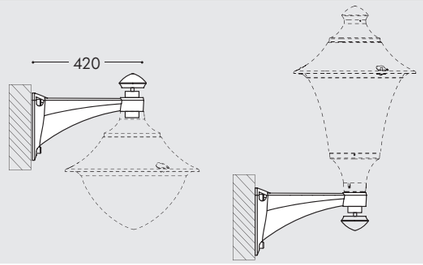




suitable for:
GINO 400 - REMO 400
VIVI 400 - ECOVIVI 400
GLOBE 400

MIDIPILAR SYSTEM 1L

000.000.A10






suitable for:
VIVI 400 - ECOVIVI 400
GLOBE 400

PILAR WALL BRACKET

H.253.WAL

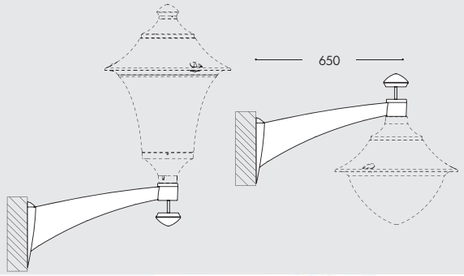




suitable for:
GINO 500 - REMO 500
VIVI 500 - ECOVIVI 500
BEPPE 500 - GLOBE 500

PILAR SYSTEM 1L

000.000.P10






suitable for:
VIVI 500 - ECOVIVI 500
GLOBE 500

NEW LOT BASE

H.115




suitable for:
GINO 400 - REMO400
VIVI 400 - ECOVIVI 400
BEPPE 400 - ECOBEPPE 400
GLOBE 400 - GINO 500
REMO 500 - VIVI 500
ECOVIVI 500 - GLOBE 500



POST TOP SYSTEM

MIDIPILAR SYSTEM 2L

000.000.A20

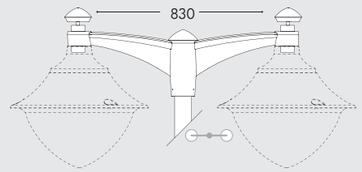




suitable for:
VIVI 400 - ECOVIVI 400
GLOBE 400

MIDIPILAR SYSTEM 3L

000.000.A30

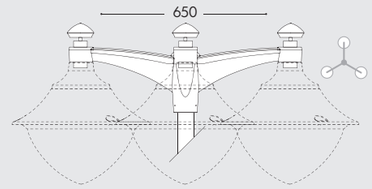




suitable for:
VIVI 400 - ECOVIVI 400
GLOBE 400

PILAR SYSTEM 2L

000.000.P20

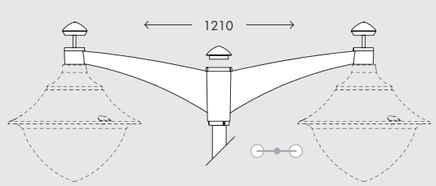



suitable for:
VIVI 500 - ECOVIVI 500
GLOBE 500



FULLY MODULAR

The unique 60mm hub allows thousands of different possible combinations to create your perfect outdoor light fitting.

LUIGI HIGH-BAY



fumagalli since 1973

NEW HIGH POWER LED

INDOOR & OUTDOOR USE

+80°C -30°

90% HUMIDITY

VOLTAGE SURGE RESISTANT

50W (6550 lm)
60W (7600 lm)

More details at page 73

CCT SETTABLE

3000 K | 4000 K | 6500 K

SDCM <6

GX53 MODULAR LED LIGHT SYSTEM

- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick and easy lamp replacement
- **Great flexibility:** GX53 standard lamp holder
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments

AVAILABLE COLORS

RESIN BODY (MOULDED COLOURS)			DIFFUSER	
BLACK **(A)**	GREY **(L)**	WHITE **(W)**	CLEAR **(X)**	OPAL **(Y)**

UV-TREATED · ANTI-SHOCK · RECYCLABLE · CE · CB IECEE CB SCHEME · IP55 · CLASS II DOUBLE INSULATION

HIGH POWER LED					
LAMP	POWER	LUMINOUS FLUX UP TO	VOLTAGE RANGE	COLOUR TEMPERATURE	
E27 HIGH POWER LED Ø 100	30W	3620 lm	100-240V 50/60 Hz	4000K/3000K CCT SET	LUIGI 400 = 50W HQI-SON
E27 HIGH POWER LED Ø 118	50W	6550 lm	100-240V 50/60 Hz	4000K	LUIGI 400-LUIGI 500 = 70W HQI-SON
				3000K	
E27 HIGH POWER LED Ø 138	60W	7600 lm	100-240V 50/60 Hz	4000K	LUIGI 500 = 100W HQI-SON
				3000K	


GX53 LED					
LAMP	POWER	LUMINOUS FLUX (Φ TOTAL)	VOLTAGE RANGE	CCT SETTABLE	
GX53	6x10W **60W**	7740 lm	100-240V 50/60 Hz	6500K/4000K/3000K CCT SET	LUIGI 400 = 100W HQI - SON
GX53	9x10W **90W**	11610 lm	100-240V 50/60 Hz	6500K/4000K/3000K CCT SET	LUIGI 500 = 150W HQI - SON

LUIGI 500-DR HIGH POWER LED


LAMP INCLUDED HIGH POWER LED E27



50W LED	4000K	L51.128.H1L
	3000K	L51.128.H1R
60W LED	4000K	L51.128.W1L
	3000K	L51.128.W1R




9x10W **90W** CCT SET — L5F.128.D9K



LUIGI 500 GX53 LED

LAMP INCLUDED: GX53 LED

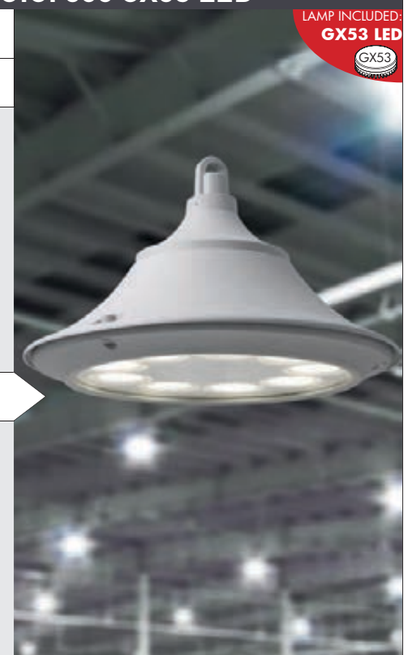


LUIGI 400-DR HIGH POWER LED


LAMP INCLUDED HIGH POWER LED E27



30W LED	CCT SET	L41.128.Q1K
50W LED	4000K	L41.128.H1L
	3000K	L41.128.H1R




6x10W **60W** CCT SET — L4F.128.D6K



LUIGI 400 GX53 LED

LAMP INCLUDED: GX53 LED

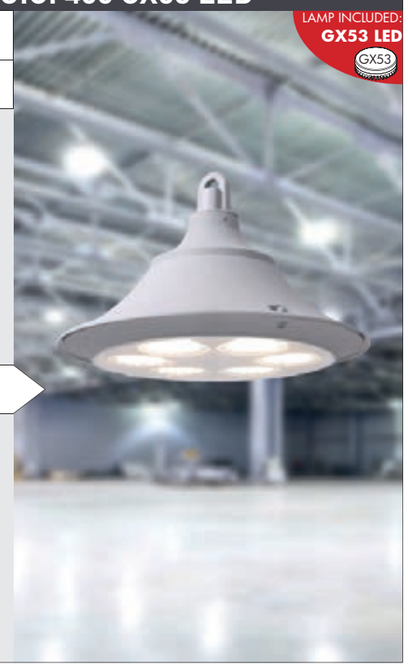

G9LED



VOLTAGE 100-240V

POWER		1,7 W
LUMINOUS FLUX (Φ TOTAL)	3000 K	150 lm
	4000 K	150 lm
SIZE & SOCKET		Ø23 · 31
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
PSTLM (NO FLICKER)		<1
SVM		0,9
CRI		> 80
SDCM		<6
SWITCHING CYCLE		>40.000
WARM UP TIME		⩽ 0,5"
LIFETIME		15.000 h
KELVIN		3000 K / 4000 K
EFFICIENCY CLASS		F / F
REF. CODE		H.LED.G09.3K / H.LED.G09.4K

INDOOR & OUTDOOR USE
-30 +80 °C | 90% HUMIDITY
VOLTAGE SURGE RESISTANT

ENERG — FUMAGALLI S.R.L. H.LED.G09.3K — F — 2 kWh/1000h — 2019/2015

COMPLY WITH:
EU 2019/2015
EU 2019/2020

TÜV SÜD — CE LVD EMC — CB ERP

IECEE CB SCHEME — IECEE CB CERTIFICATE: SG PSB-LE-02130

GU10 LED - CCT SETTABLE

NEW VERSION

NEW GU10 130 lumen/W



VOLTAGE 100-240V

POWER		2,9 W	4,8 W
LUMINOUS FLUX (Φ TOTAL)	2700 K	360 lm	580 lm
	4000 K	390 lm	625 lm
SIZE & SOCKET		Ø50 · 54 · 92% savings =35W halogen · GU10	Ø50 · 54 · 91% savings =50W halogen · GU10
LUMINOUS FLUX (Φ USE 90°)		280 lm	450 lm
VOLTAGE		100-240 V	100-240 V
FREQUENCY		50/60 Hz	50/60 Hz
DISPLACEMENT FACTOR		>0,95	>0,95
PSTLM (NO FLICKER)		<1	<1
SVM		0,4	0,4
CRI		> 80	> 80
SDCM		<5	<5
BEAM ANGLE		48°	47°
SWITCHING CYCLE		> 25.000	> 25.000
WARM UP TIME		⩽ 0,5"	⩽ 0,5"
LIFETIME		25.000 h	25.000 h
EFFICIENCY CLASS		E	E
REF. CODE		H.LED.GU10.CCT	H2.LED.GU10.CCT

CCT SETTABLE — 2700 K | 4000 K — SDCM <3

SILICONE PROTECTION (4,8W) — DRIVER

INDOOR & OUTDOOR USE
-30 +80 °C | 90% HUMIDITY
VOLTAGE SURGE RESISTANT

ENERG — FUMAGALLI SRL H2.LED.GU10.CCT(V2) — E — 5 kWh/1000h — 2019/2015

COMPLY WITH:
EU 2019/2015
EU 2019/2020

TÜV SÜD — CE LVD EMC — CB ERP

IECEE CB SCHEME — IECEE CB CERTIFICATE: SG PSB-LE-06599

*SASO version available upon request.

TÜV CERTIFIED LED MODULES

R7s LED 78mm- CCT SETTABLE

SIZE & SOCKET — R7s — Ø22 · 78

CCT SETTABLE — 2700 K | 4000 K | 6500 K — SDCM <6

INDOOR & OUTDOOR USE
-30 +80 °C | 90% HUMIDITY
VOLTAGE SURGE RESISTANT

ENERG — FUMAGALLI SRL H7.LED.R7S.CCT(V2) — F — 4 kWh/1000h — 2019/2015

COMPLY WITH:
EU 2019/2015
EU 2019/2020



VOLTAGE 100-240V

POWER		3,5W
LUMINOUS FLUX (Φ TOTAL)	2700 K	325 lm
	4000 K	365 lm
	6500 K	365 lm
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0
PSTLM (NO FLICKER)		<1
SVM		0,4
CRI		> 80
SDCM		<6
SWITCHING CYCLE		45.000
WARM UP TIME		⩽ 0,5"
LIFETIME		25.000 h
EFFICIENCY CLASS		F
REF. CODE		H7.LED.R7S.CCT

R7s LED 118mm- CCT SETTABLE

SIZE & SOCKET — R7s — Ø22 · 118

SILICONE PROTECTION — DRIVER

INDOOR & OUTDOOR USE
-30 +80 °C | 90% HUMIDITY
VOLTAGE SURGE RESISTANT

CCT SETTABLE — 2700 K | 4000 K | 6500 K — SDCM <6

ENERG — FUMAGALLI SRL H8.LED.R7S.CCT(V2) — F — 8 kWh/1000h — 2019/2015

COMPLY WITH:
EU 2019/2015
EU 2019/2020



VOLTAGE 100-240V

POWER		7,5 W
LUMINOUS FLUX (Φ TOTAL)	2700 K	680 lm
	4000 K	775 lm
	6500 K	790 lm
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0,5
PSTLM (NO FLICKER)		<1
SVM		0,4
CRI		> 80
SDCM		<6
SWITCHING CYCLE		45.000
WARM UP TIME		⩽ 0,5"
LIFETIME		25.000 h
EFFICIENCY CLASS		F
REF. CODE		H8.LED.R7S.CCT

R7s LED 189mm- CCT SETTABLE

SIZE & SOCKET — R7s — Ø22 · 189

SILICONE PROTECTION — DRIVER

INDOOR & OUTDOOR USE
-30 +80 °C | 90% HUMIDITY
VOLTAGE SURGE RESISTANT

CCT SETTABLE — 2700 K | 4000 K | 6500 K — SDCM <6

ENERG — FUMAGALLI SRL H9.LED.R7S.CCT(V2) — F — 11 kWh/1000h — 2019/2015

COMPLY WITH:
EU 2019/2015
EU 2019/2020



VOLTAGE 100-240V



POWER		10,5 W
LUMINOUS FLUX (Φ TOTAL)	2700 K	1000 lm
	4000 K	1130 lm
	6500 K	1060 lm
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0,7
PSTLM (NO FLICKER)		<1
SVM		0,4
CRI		> 80
SDCM		<6
SWITCHING CYCLE		45.000
WARM UP TIME		⩽ 0,5"
LIFETIME		25.000 h
EFFICIENCY CLASS		F
REF. CODE		H9.LED.R7S.CCT

*SASO version available upon request

E27 LED A60- CCT SETTABLE



VOLTAGE
100-240V

POWER		8,5 W	11 W
LUMINOUS FLUX (Φ TOTAL)	2700 K	840 lm	1100 lm
	4000 K	920 lm	1200 lm
	6500 K	920 lm	1200 lm
SIZE & SOCKET		 E27	 E27
VOLTAGE		100-240 V	100-240 V
FREQUENCY		50/60 Hz	50/60 Hz
DISPLACEMENT FACTOR		>0,5	>0,7
PSTLM (NO FLICKER)		< 1	< 1
SVM		0,4	0,4
CRI		> 80	> 80
SDCM		<6	<6
LIFETIME		25.000 h	25.000 h
EFFICIENCY CLASS		F	F
REF. CODE		H.LED.A60.CCT	H2.LED.A60.CCT

CCT SETTABLE 2700 K 4000 K 6500 K SDCM <6

INDOOR & OUTDOOR USE
-30 +80 °C | 90% HUMIDITY
VOLTAGE SURGE RESISTANT

ENERG F 9 kWh/1000h
COMPLY WITH:
EU 2019/2015
EU 2019/2020


TÜV SÜD
CE LVD EMC
CB ERP
IECEE CB SCHEME
IECEE CB CERTIFICATE:
SG PSB-LE-03297

*SASO version available upon request.

E27 LED FILAMENT A60



VOLTAGE
100-240V

POWER		6,5 W
LUMINOUS FLUX (Φ TOTAL)	2700 K	800 lm
SIZE & SOCKET		 E27
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0,5
CRI		> 80
SWITCHING CYCLE		>100.000
WARM UP TIME		≤ 0,5"
LIFETIME		25.000 h
EFFICIENCY CLASS		E
REF. CODE		H.LED.FIL.3K

INDOOR & OUTDOOR USE
-30 +80 °C | 90% HUMIDITY
VOLTAGE SURGE RESISTANT



ENERG E 7 kWh/1000h
COMPLY WITH:
EU 2019/2015
EU 2019/2020

TÜV SÜD
CE LVD EMC
CB ERP
IECEE CB SCHEME
IECEE CB CERTIFICATE:
SG PSB-LE-03735


E27 HIGH POWER LED



VOLTAGE
100-240V

POWER		15 W	30W
LUMINOUS FLUX (Φ TOTAL)	3000 K	1545 lm	3325lm
	4000 K	1690 lm	3620 lm
SIZE & SOCKET		 E27	 E27
VOLTAGE		100-240 V	100-240 V
FREQUENCY		50/60 Hz	50/60 Hz
DISPLACEMENT FACTOR		>0,7	>0,9
PSTLM (NO FLICKER)		<1	<1
SVM		0,4	0,4
CRI		> 80	> 80
SWITCHING CYCLE		30.000	30.000
WARM UP TIME		< 0,5"	< 1"
LIFETIME		25.000 h	25.000 h
EFFICIENCY CLASS		F	E
REF. CODE		H3.LED.HIP.CCT	H2.LED.HIP.CCT

CCT SETTABLE 3000 K 4000 K SDCM <6

SILICONE PROTECTION


INDOOR & OUTDOOR USE
-30 +80 °C | 90% HUMIDITY
VOLTAGE SURGE RESISTANT



ENERG E 30 kWh/1000h
COMPLY WITH:
EU 2019/2015
EU 2019/2020

TÜV SÜD
CE LVD EMC
CB ERP
IECEE CB SCHEME
IECEE CB CERTIFICATE:
SG PSB-LE-03835
SG PSB-LE-03834

E27 HIGH POWER LED



VOLTAGE
100-240V

POWER		50 W	60W
LUMINOUS FLUX (Φ TOTAL)	3000 K	5850 lm	6600 lm
	4000 K	6550 lm	7600 lm
SIZE & SOCKET		 E27	 E27
VOLTAGE		100-240 V	100-240 V
FREQUENCY		50/60 Hz	50/60 Hz
DISPLACEMENT FACTOR		>0,9	>0,9
PSTLM (NO FLICKER)		<1	<1
SVM		0,4	0,4
CRI		> 80	> 80
SWITCHING CYCLE		30.000	30.000
WARM UP TIME		< 1"	< 0,5"
LIFETIME		25.000 h	25.000 h
KELVIN		3000 K / 4000 K	3000 K / 4000 K
EFFICIENCY CLASS		E / E	E / E
REF. CODE		H.LED.HIP.3K / H.LED.HIP.4K	H4.LED.HIP.3K / H4.LED.HIP.4K

SILICONE PROTECTION


INDOOR & OUTDOOR USE
-30 +80 °C | 90% HUMIDITY
VOLTAGE SURGE RESISTANT


ENERG E 50 kWh/1000h
COMPLY WITH:
EU 2019/2015
EU 2019/2020


TÜV SÜD
CE LVD EMC
CB ERP
IECEE CB SCHEME
IECEE CB CERTIFICATE:
SG PSB-LE-03791
SG PSB-LE-03799


*SASO version available upon request


GX53 LED Ø75mm- CCT SETTABLE



POWER		**3 W**
LUMINOUS FLUX (Φ TOTAL)	3000 K	405 lm
	4000 K	410 lm
	6500 K	410 lm
SIZE & SOCKET		
LUMINOUS FLUX (Φ USE 120°)		335 lm
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
PSTLM (NO FLICKER)		<1
SVM		0,4
CRI		> 80
SDCM		<6
BEAM ANGLE		112°
SWITCHING CYCLE		> 30.000
WARM UP TIME		0s
LIFETIME		25.000 h
EFFICIENCY CLASS		E
REF. CODE		H.LED.G53.CCT








COMPLY WITH:
EU 2019/2015
EU 2019/2020


LVD
EMC
ERP

IECEE CB CERTIFICATE:
SG PSB-LE-03887


GX53 LED Ø100mm - CCT SETTABLE



POWER		**10W**
LUMINOUS FLUX (Φ TOTAL)	3000 K	1190 lm
	4000 K	1290 lm
	6500 K	1210 lm
SIZE & SOCKET		
LUMINOUS FLUX (Φ USE 120°)		975 lm
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0,5
PSTLM (NO FLICKER)		< 1
SVM		0,4
CRI		> 80
SDCM		<6
BEAM ANGLE		112°
SWITCHING CYCLE		> 30.000
WARM UP TIME		0s
LIFETIME		25.000 h
EFFICIENCY CLASS		E
REF. CODE		H3.LED.G53.CCT







COMPLY WITH:
EU 2019/2015
EU 2019/2020


LVD
EMC
ERP


IECEE CB CERTIFICATE:
SG PSB-LE-03887


*SASO version available upon request.

GX53 LED Ø160mm- POWER SETTABLE / CCT SETTABLE



POWER		**15W /** 9 W eco mode
LUMINOUS FLUX (Φ TOTAL)	2700 K	**1780 lm** 1200 lm
	4000 K	**1940 lm** 1300 lm
SIZE & SOCKET		
VOLTAGE		100-240 V
FREQUENCY		50/60 Hz
DISPLACEMENT FACTOR		>0,9
PSTLM (NO FLICKER)		<0,1
SVM		0,4
CRI		> 80
SDCM		<6
SWITCHING CYCLE		> 15.000
WARM UP TIME		⩽ 0,5"
LIFETIME		25.000 h
EFFICIENCY CLASS		E
REF. CODE		H7.LED.G53.CCT






COMPLY WITH:
EU 2019/2015
EU 2019/2020

LVD
EMC
ERP

IECEE CB CERTIFICATE:
SG PSB-LE-06107

SOLAR MODULE

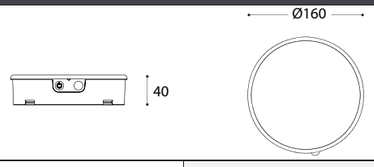

SIZE		
ENERGY SAVING MODE	LUMEN	20
	AUTONOMY	46h
FULL POWER MODE	LUMEN	280
	ACTIVE TIME	25 sec
SOLAR PANEL		5V/2W
		Monocrystaline
		Antishock material
		High resistant tempered glass
CHARGING TIME		6h
REPLACEABLE BATTERY		LiFePO4 IFR26650E3400, 3.2V
		No Risk of explosion
		Longer Lifetime
PIR SENSOR		Detection angle 120°
		Fields of detection up to 5 mt
		Active for 25 sec.
LED	1 CIRCUITS	SMD 2835
	COLOR RENDERING INDEX RA	> 80
	SDCM	< 6
	LIFETIME	30.000 h
	KELVIN	4000 K
REF. CODE		H2.LED.SOL.4K



IECEE CB CERTIFICATE:
SG PSB-LE-05512

LVD
EMC
ERP

LOOKING FOR SOMETHING ELSE?

GARDEN RANGE



PROJECT RANGE



TO SEE OUR COMPLETE COLLECTION

Ask for our NEW General Catalogue 2027
or visit our website at
www.fumagalli.it



1973 2023 50 YEARS

ITALY'S EXPORT CHAMPIONS 2022
Il Sole 24 ORE statista

MADE IN ITALY

231 DISTRIBUTORS ALL OVER THE WORLD

190 EMPLOYEES

COME TO VISIT US



RESIN MATERIAL ADVANTAGES

fumagalli® since 1973

CERTIFIED IQNet MANAGEMENT SYSTEM

ANTI RUST
LIFETIME GUARANTEE
NO PAINTING REQUIRED
MADE IN **ITALY**

NO MAINTENANCE



ANTI-CORROSION



DOUBLE INSULATION



NOT AFFECTED BY CHEMICAL FERTILIZERS



UV-RAY STABILIZED



RECYCLABLE · UV TREATED · DOUBLE INSULATION · ANTI-SHOCK · TEMPERATURE · ENERGY SAVING · RESIDENTIAL · PUBLIC

HOW TO READ THE CODE

DIFFUSER		STRUCTURE		SYSTEM		COLOUR OF THE STRUCTURE		COLOUR OF THE DIFFUSER		ELECTRIFICATION
IDENTIFIES THE DIFFUSER		IDENTIFIES THE STRUCTURE ON WHICH THE DIFFUSER IS MOUNTED (POLE, BRACKET, BASE, SPIKE)		IDENTIFIES THE MULTILIGHT SYSTEM IF PRESENT		IDENTIFIES THE COLOUR OF THE STRUCTURE **A** BLACK **W** WHITE **L** GREY		IDENTIFIES THE COLOUR OF THE DIFFUSER **X** CLEAR/FROSTED **Y** OPAL **Z** SMOKED		IDENTIFIES THE TYPE OF ELECTRIFICATION AND THE EVENTUAL PRESENCE OF BULBS
V50	.	**361**	.	**A20**	.	**A**		**X**		**H1L**

MADE IN ITALY

fumagalli®

since 1973

Fumagalli S.r.l.
Via Ca' Bassa, 59
21100 Varese - ITALY
Tel.+39.0332.336353
Fax.+39.0332.336358
E-mail customerservice@fumagalli.it

www.fumagalli.it