


FUMAGALLI LED LAMPS

MODULAR SYSTEM



Innovative **TÜV certified LED lamps** with standard E27, GX53 ,R7s, GU10 or G9 lamp holder to get a very efficient LED lighting system. Heatsink and driver are built-in the lamps. LED modules can be easily replaced without the help of a qualified technician. Available in different wattage versions and color temperature. Moreover combining in series Fumagalli GX53 lamps you get a powerful and efficient public lighting system both on classic and modern luminaries.

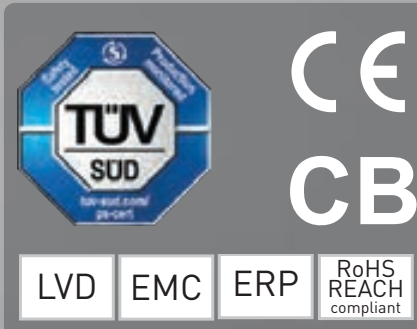

BENEFITS:

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** quick and easy lamp replacement.
- **GREAT FLEXIBILITY:** standard lamp holder.
- **FUTURE-PROOFED LUMINARIES:** performances easy to upgrade to latest technology developments.
- **SUITABLE FOR OUTDOOR USE:** driver fully protected against heat and humidity by silicone paste.
- **TÜV CERTIFIED QUALITY:** Production monitored, CE marked, LVD and EMC tested, in compliance with the European Ecodesign Directive (ERP) and with RoHS and REACH directives. CB certified.



Power surges resistant

- **Wide voltage range (100-240V)** to protect the driver both from voltage droop and voltage overshoot, which are quite frequent in case of outdoor installations.
- **Double 400V capacitors** and multiple resistances to withstand power surges.
- **Silicone paste** to avoid – in case of voltage swings- the vibration of the electronic components of the driver and the consequent risk of components unsoldering.



Heat resistant - Working temperature -30°+80°C

- **Gold wire bonding:** Chips connected by pure gold wires, which are able to withstand at the highest and lowest temperatures and at temperature fluctuations between day and night. The gold wire bonding can grant a lumens maintenance factor > 80%.
- **Silicone paste:** Thermoconductive silicone paste with metal powder inside for helping heat dissipation and avoid overheating problems and for protecting the electronic components in case of high and low temperatures.



Humidity resistant - Weatherproof driver for a longer lifetime

- **Silicone paste:** The driver is fully enclosed in a special silicone paste, which ensures the highest driver protection against moisture and humidity up to 90%, both unavoidable in outdoor installations.



Tested according to :
EN 62560:2012/A1: 2015
IEC/TR 62778:2014
EN 62493:2015



LVD
TESTED

LVD Certificate: Fumagalli lamps fulfil the Low Voltage Directive 2014/35/EU, therefore are CE marked and comply with safety requirements like protection against electrical shock, moisture and heat resistance, resistance to flame and ignition.

EMC
TESTED

EMC Certificate: Fumagalli lamps meet the Electromagnetic Compatibility Directive 2014/30/EU and its amendments.

NEW
ERP

New ERP Attestation of conformity: Fumagalli lamps fulfil the NEW European Ecodesign Directive EU 2019/2020, which sets stricter energy efficiency requirements, new verification tolerances and other factors such as bulb lifetime and warm-up time.

CB
IECEE CB
SCHEME

IECEE CB Certificate: Fumagalli lamps meet the International System for Conformity and Certification of Electrotechnical Equipment allowing direct market access in more than 50 countries all over the world.

RoHS
REACH
COMPLIANT

RoHS REACH compliant: Fumagalli lamps fulfil the RoHS (Restriction of Hazardous Substances) directive 2011/65/EU and its amendments and the REACH regulation (EC) No. 1907/2006, regarding the concentration of Very High Concern Substances (SVHC).



E27 HIGH POWER LED

TÜV- CB CERTIFIED LED MODULES



SILICONE PROTECTION

DRIVER

INDOOR & OUTDOOR USE

-30 +80 °C

90% HUMIDITY

VOLTAGE SURGE
RESISTANT



GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528.



LENS

- Opal color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.
- Special lens design for a better light distribution.



THERMOCONDUCTIVE SILICONE PASTE

- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.



DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.



4000K 3620lm
3000K 3325lm
30W
100-240V



HEATSINK


- Made by white painted aluminum.
- Special design to grant a correct heat dissipation.









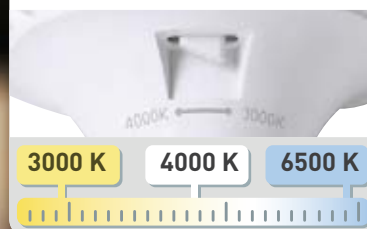

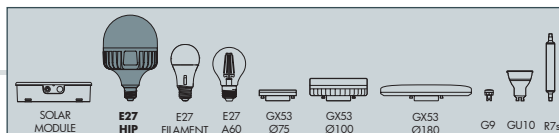





CCT SETTABLE

- Switch settable in two different positions, to select the desired Kelvin temperature (3000K, 4000K) and get a customized ambience.
- 3000k and 4000K led chips on 2 separate circuits to grant SDCM < 6.





E27 HIGH POWER LED - CCT SETTABLE				
		POWER	15 W	
		LUMINOUS FLUX (Φ TOTAL)	3000 K	1545 lm
			4000 K	1690 lm
SIZE & SOCKET				
		E27		
<div><p>CCT SETTABLE</p></div> <div><p>SILICONE PROTECTION DRIVER</p></div> <div><p>INDOOR & OUTDOOR USE</p><p>-30 +80 °C 90% HUMIDITY</p><p>VOLTAGE SURGE RESISTANT</p></div> <div><p>COMPLY WITH:</p><p>EU 2019/2015</p><p>EU 2019/2020</p></div> <div></div> <div><p>CE CB</p><p>LVD</p><p>EMC</p><p>ERP</p></div> <div></div> <p>IECEE CB CERTIFICATE: SG PSB-LE-03835</p>		VOLTAGE	100-240 V	
		FREQUENCY	50/60 Hz	
		DISPLACEMENT FACTOR	>0,7	
		PSTLM (NO FLICKER)	<1	
		SVM	0,4	
		CRI	> 80	
		SDCM	<6	
		SWITCHING CYCLE	30.000	
		WARM UP TIME	< 0,5"	
		LIFETIME	25.000 h	
		EFFICIENCY CLASS	F	
		REF. CODE	H3.LED.HIP.CCT	

E27 HIGH POWER LED - CCT SETTABLE				
		POWER	30W	
		LUMINOUS FLUX (Φ TOTAL)	3000 K	3325 lm
			4000 K	3620 lm
SIZE & SOCKET				
<div>CCT SETTABLE</div> <div> 3000 K 4000 K</div> <div></div> <div><div>INDOOR & OUTDOOR USE</div><div>-30 +80 °C 90% HUMIDITY</div><div>VOLTAGE SURGE RESISTANT</div></div>		<div></div> <div><div>CE</div><div>CB</div><div>LVD</div><div>EMC</div><div>ERP</div></div> <div></div> <div>IECEE CB CERTIFICATE: SG PSB-LE-03834</div>		
<div></div> <div>COMPLY WITH: EU 2019/2015 EU 2019/2020</div>		<div>VOLTAGE</div> <div>FREQUENCY</div> <div>DISPLACEMENT FACTOR</div> <div>PSTLM (NO FLICKER)</div> <div>SVM</div> <div>CRI</div> <div>SDCM</div> <div>SWITCHING CYCLE</div> <div>WARM UP TIME</div> <div>LIFETIME</div> <div>EFFICIENCY CLASS</div> <div>REF. CODE</div> <div>100-240 V</div> <div>50/60 Hz</div> <div>>0,9</div> <div><1</div> <div>0,4</div> <div>> 80</div> <div><6</div> <div>30.000</div> <div>< 1"</div> <div>25.000 h</div> <div>E</div> <div>H2.LED.HIP.CCT</div>		

E27 HIGH POWER LED

TÜV- CB CERTIFIED LED MODULES



SILICONE PROTECTION

DRIVER

**INDOOR &
OUTDOOR USE**

-30 +80 °C

90%
HUMIDITY

VOLTAGE SURGE
RESISTANT



GOLD WIRE BONDING

- LED chips connected by pure **gold wires** able to withstand at the highest and lowest temperatures and granting a **lumens maintenance factor > 80%**.
- SMD 3528.



LENS

- Opal color lens reducing dazzle.
- Made of UV stabilized resin material to avoid yellowing process.
- Special lens design for a better light distribution.



HEATSINK

- Made by white painted aluminum.
- Special design to grant a correct heat dissipation.



DRIVER 100-240V

- IC isolated driver technology.
- Wide voltage range: **100-240V** +/- 10% tolerance to protect the driver both from voltage droop and voltage overshoot.
- **Double 400V capacitors** and multiple resistances to withstand power surges.




H. LED. HEP-4K
50W 210mA 4000K
100-240V 50/60Hz
2312


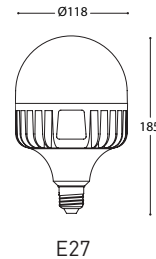





THERMOCONDUCTIVE SILICONE PASTE



- To protect the driver against moisture and humidity up to **90%**, granting a longer product lifetime
- To help heat dissipation thanks to the metal powder inside the paste, granting **-30°+80°C** working temperature.
- To avoid the vibration and the unsoldering of the electronic components of the driver.

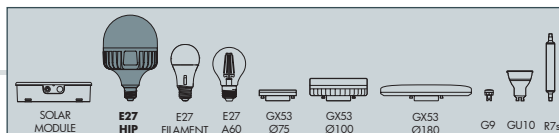




IECEE CB CERTIFICATE



E27 HIGH POWER LED					
		POWER		50 W	
		LUMINOUS FLUX (Φ TOTAL)	3000 K	5850 lm	
			4000 K	6550 lm	
		SIZE & SOCKET			
<div><div><div>SILICONE PROTECTION</div><div>DRIVER</div><div></div><div>INDOOR & OUTDOOR USE</div><div><div>-30 +80 °C</div><div>90% HUMIDITY</div></div><div>VOLTAGE SURGE RESISTANT</div><div></div></div><div><div>ENERGY</div><div>FORMALLY VAL H.LED.HIP.4K(VQ)</div><div><div>A</div><div>B</div><div>C</div><div>D</div><div>E</div><div>F</div><div>G</div></div><div><div>50</div><div>kWh/1000h</div></div><div></div></div><div><div>COMPLY WITH:</div><div>EU 2019/2015</div><div>EU 2019/2020</div></div><div><div></div><div><div>CE</div><div>CB</div></div><div><div>LVD</div><div>EMC</div><div>ERP</div></div><div><div></div><div>IECEE CB CERTIFICATE:</div><div>SG PSB-LE-03791</div></div></div></div>		VOLTAGE		100-240 V	
		FREQUENCY		50/60 Hz	
		DISPLACEMENT FACTOR		>0,9	
		PSTLM (NO FLICKER)		<1	
		SVM		0,4	
		CRI		> 80	
		SWITCHING CYCLE		30.000	
		WARM UP TIME		< 1"	
		LIFETIME		25.000 h	
		KELVIN		3000 K	4000 K
EFFICIENCY CLASS		E		E	
REF. CODE		H.LED.HIP.3K		H.LED.HIP.4K	

E27 HIGH POWER LED				
	POWER		60W	
	LUMINOUS FLUX (Φ TOTAL)	3000 K	6800 lm	
		4000 K	7600 lm	
	SIZE & SOCKET			

<div><div>SILICONE PROTECTION</div><div></div><div>DRIVER</div><div>INDOOR & OUTDOOR USE</div><div><div>-30 +80 °C</div><div>90% HUMIDITY</div></div><div>VOLTAGE SURGE RESISTANT</div><div></div></div> <div><div>ENERGY</div><div>FORMALLY VAL</div><div>H4.LED.HIP.4K(VQ)</div><div><div>A</div><div>B</div><div>C</div><div>D</div><div>E</div><div>F</div><div>G</div></div><div>E</div><div>60 kWh/1000h</div><div></div></div> <div><div>IECEE</div><div>CB</div><div>SCHEME</div></div> <div>IECEE CB CERTIFICATE: SG PSB-LE-03799</div>	VOLTAGE		100-240 V	
	FREQUENCY		50/60 Hz	
	DISPLACEMENT FACTOR		>0,9	
	PSTLM (NO FLICKER)		<1	
	SVM		0,4	
	CRI		> 80	
	SWITCHING CYCLE		30.000	
	WARM UP TIME		< 0,5"	
	LIFETIME		25.000 h	
	KELVIN	3000 K	4000 K	
EFFICIENCY CLASS		E		
REF. CODE		H4.LED.HIP.3K		
		H4.LED.HIP.4K		