

STUCCHI


SQUARE

Square bulkhead lamp made of shockproof resin material, UV-rays stabilized, rust and corrosion-free. Suitable for wall and ceiling installation. Supplied as option with colored backlit base. **Kelvin & Power settable GX53 LED** or **E27** version available. Insulation class II, Protection rating IP66.






STUCCHI
1U3.000

*Plafoniera quadra realizzata in resina antiurto stabilizzata ai raggi UV, inattaccabile da ruggine e corrosione. Idonea per il montaggio a parete e a soffitto. Disponibile anche con base per retroilluminazione colorata. Fornita nella versione a **LED GX53 con Kelvin e Potenza impostabili** o **E27**. Classe di isolamento II, grado di protezione IP66.*

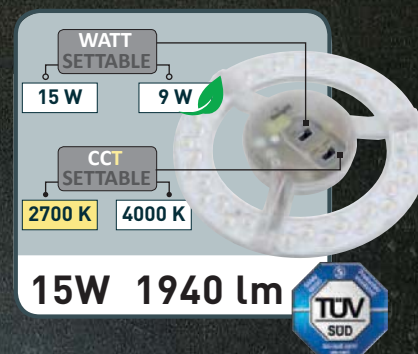

1U3.000.E1P

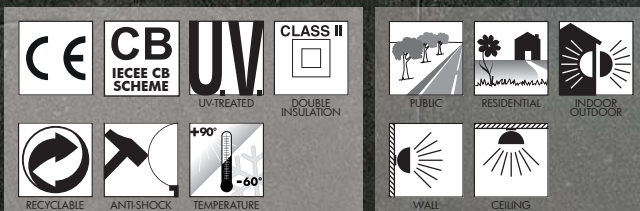

STUCCHI - COMPONENTS

IP 66



COVER made of shockproof resin material, UV-rays stabilized.

COVER in resina antiurto stabilizzata ai raggi UV.

Opal **DIFFUSER** made of UV-rays stabilized polymethylmethacrylate (PMMA), with silicone rubber gasket to ensure high protection against external agents.


DIFFUSORE opale realizzato in polimetilmetacrilato (PMMA) stabilizzato ai raggi UV. Completo di guarnizione in gomma siliconica per garantire un alto livello di protezione contro gli agenti esterni.

BASE made of shockproof resin material, provided with E27 or GX53 lampholder. Available in different backlit colours to create a coloured effect on wall and ceilings.

BASE realizzata in resina antiurto. Fornita completa di portalampada E27 o GX53. Disponibile in diversi colori per creare una retroilluminazione colorata su pareti e soffitti.



STUCCHI



Dimensions and weight

Height: 310 mm
Width: 310 mm
Depth: 90 mm
Weight: 1 Kg

Moulded colours:

☒ Black ☐ White ☐ Grey

Diffuser PMMA:

☐ Opal

LED LAMPS




Comply with: EU2019/2015
EU2019/2020
Technical details on page 668.

SETTABLE LED LAMP

POWER SETTABLE



CCT SETTABLE



POWER switch settable in two different positions to select full power mode (15W) or eco mode (9W).
CCT switch settable in two different positions, to select the desired Kelvin temperature (2700K/4000K) and get a customized ambiance.

GX53 LED

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** and complete with TÜV-CB certified, long-life, efficient, **Kelvin and Power settable GX53 LED lamp included.**

- **COST SAVING:** long-life and efficient LED light sources.
- **BUILT-IN DRIVER:** Quick and easy lamp replacement.
- **UNIFORM LIGHT:** No shadows on the diffuser.

100 - 240 V

LAMP	POWER SETTABLE	LUMINOUS FLUX UP TO	COLOUR TEMP.	*ADD. SUFFIX
	15 W	1940 lm	2700 K	.E1P
			4000 K	
			2700 K	
			4000 K	
	9 W eco mode	1300 lm		



15W-9W = 150W-100W
incandescent

SAVE 90%



E27

FULLY PRE-WIRED



Bulkhead supplied **fully pre-wired** with **E27 lampholder**. White resin reflective plate designed to grant lampholder protection and isolation. Safe fixation of the electrical devices on the plate rear side.

Daylight and motion sensor available as an option. Sensor operating voltage: 220-240V (120V available on demand).

*ADD. SUFFIX

E27 (CFL-LED)	max 160 mm	.E27
E27 + SENSOR (CFL-LED)		.ES7

STUCCHI

SQUARE





STUCCHI GX53	
15W/9W	1U3.000.E1P
CCT & POWER SETTABLE GX53 LED LAMP INCLUDED 2700K/4000K	
Pcs 16 Kg 20 mc 0,194	

STUCCHI E27	
E27 lampholder	1U3.000.E27
E27 with sensor	1U3.000.ES7
Pcs 16 Kg 16.8 mc 0,194	